

FLUSH-MOUNTED DOWNLIGHT 719 12W 4000K

REF. 71921030-984



BASIC INFORMATION

FINISH

White

PACKAGING

Box

APPLICATION

General lighting

ETIM CLASS

EC001744

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

POWER SUPPLY (V~)

220/240 V~

COLOR TYPE

WW

IP RATING

IP20

CONTROL

On/Off

OPTICS


Microprismatic

PHOTOMETRY ASSETS – CONICAL

0.5	1.15 1.21	E(0°) 3900 E(C90) 549 E(C0) 505
1.0	2.31 2.42	E(0°) 975 E(C90) 137 E(C0) 126
1.5	3.46 3.63	E(0°) 433 E(C90) 61 E(C0) 56
2.0	4.62 4.84	E(0°) 244 E(C90) 34 E(C0) 32
2.5	5.77 6.04	E(0°) 156 E(C90) 22 E(C0) 20
3.0	6.93 7.25	E(0°) 108 E(C90) 15 E(C0) 14

Separación [m] Diámetro cónico [m] Intensidad luminica [lx]
 — C0 - C180 (Semiángulo de dispersión: 100.8°)
 — C90 - C270 (Semiángulo de dispersión: 98.2°)

PHOTOMETRY ASSETS – POLAR

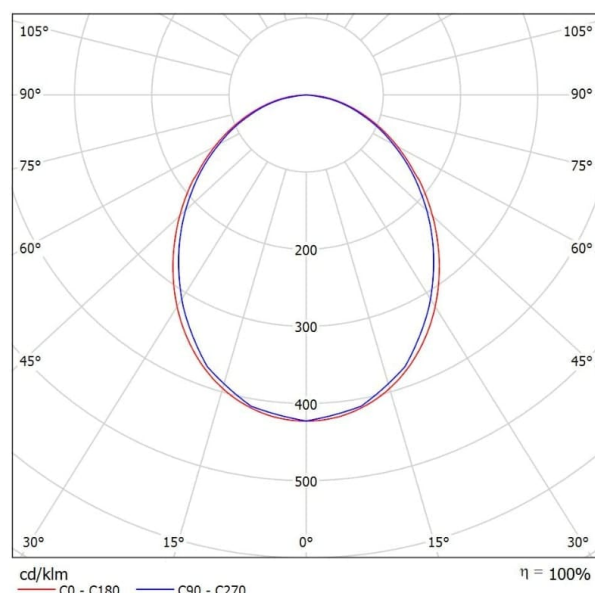

INSTALLATION AND MAINTENANCE

MINIMUM INSTALLATION HEIGHT

35

REGULATIONS

WARRANTY

3 years

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/2020) | Dir. 2009/125/EC ErP (Reg. UE 2019/2015) | Dir. 2011/65/UE RoHS + post. mod. | EN 60598-2-2:2012 | EN IEC 55015:2019 + A11:2020 | EN 62493:2015 | EN 61547:2009 | EN 62717:2017 + A2:2019 | EN IEC 61000-3-2:2019 + A1:2021*1 | EN IEC 63000:2018 | EN 61000-3-3:2013 + A1:2019 + A2:2021

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053326985

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.142

PRODUCT NET WEIGHT

0.092

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053326985

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

40

PACKAGING WIDTH

153

PACKAGING LENGTH

153

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

936360

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.142

PACKAGING NET WEIGHT

0.092

PACKAGING WEIGHT UNIT

KGM