
Flush-mount trim cover for adjustable floor box or service cover 6 elements graphite Simon 500 Cima

REF. **52053103-038**

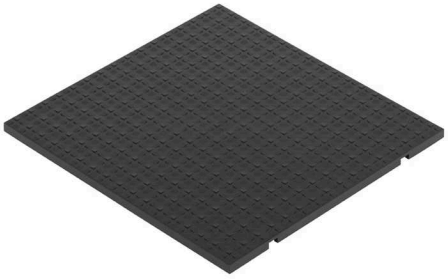

BASIC INFORMATION

DESCRIPTION

This floor box is included in the Simon 500 Cima range and is specially designed to be installed in a very simple way by recessing in concrete floors, although it is also suitable for raised floor. The box is capable of providing energy to a total of 6 elements of electrical up to 16 A and 250 volts. Consists of 6 modules and has dimensions of 226 x 187 millimetres and 76 millimetres of depth. It is available in an original graphite colour that adds a touch of modernity to the home, office or wherever it is placed. Once everything is configured, to complete the installation you will need a plastic tray with reference 52052103-035. Alternatively, you can also use a flush-mount trim cover Simon reference 52053103-038. The box is manufactured from metal components with self-extinguishing and halogen-free thermoplastic insulation.. It is material of first quality that responds to the latest in the market and that in addition to extend the service life of the product contributes to improving your safety, because they do not spread flames in case of fire and reduces the toxicity of smoke.

FINISH

Graphite

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)
+90 °C

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

IK CLASSIFICATION
08

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
6 modules

RAL
7021

VERSION
6 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised or concrete floor with adjustable floor boxes or service covers

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.111

PRODUCT NET WEIGHT
0.111

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101537

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
75

PACKAGING WIDTH
165

PACKAGING LENGTH
170

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
3.217

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.11

PACKAGING WEIGHT UNIT
KGM

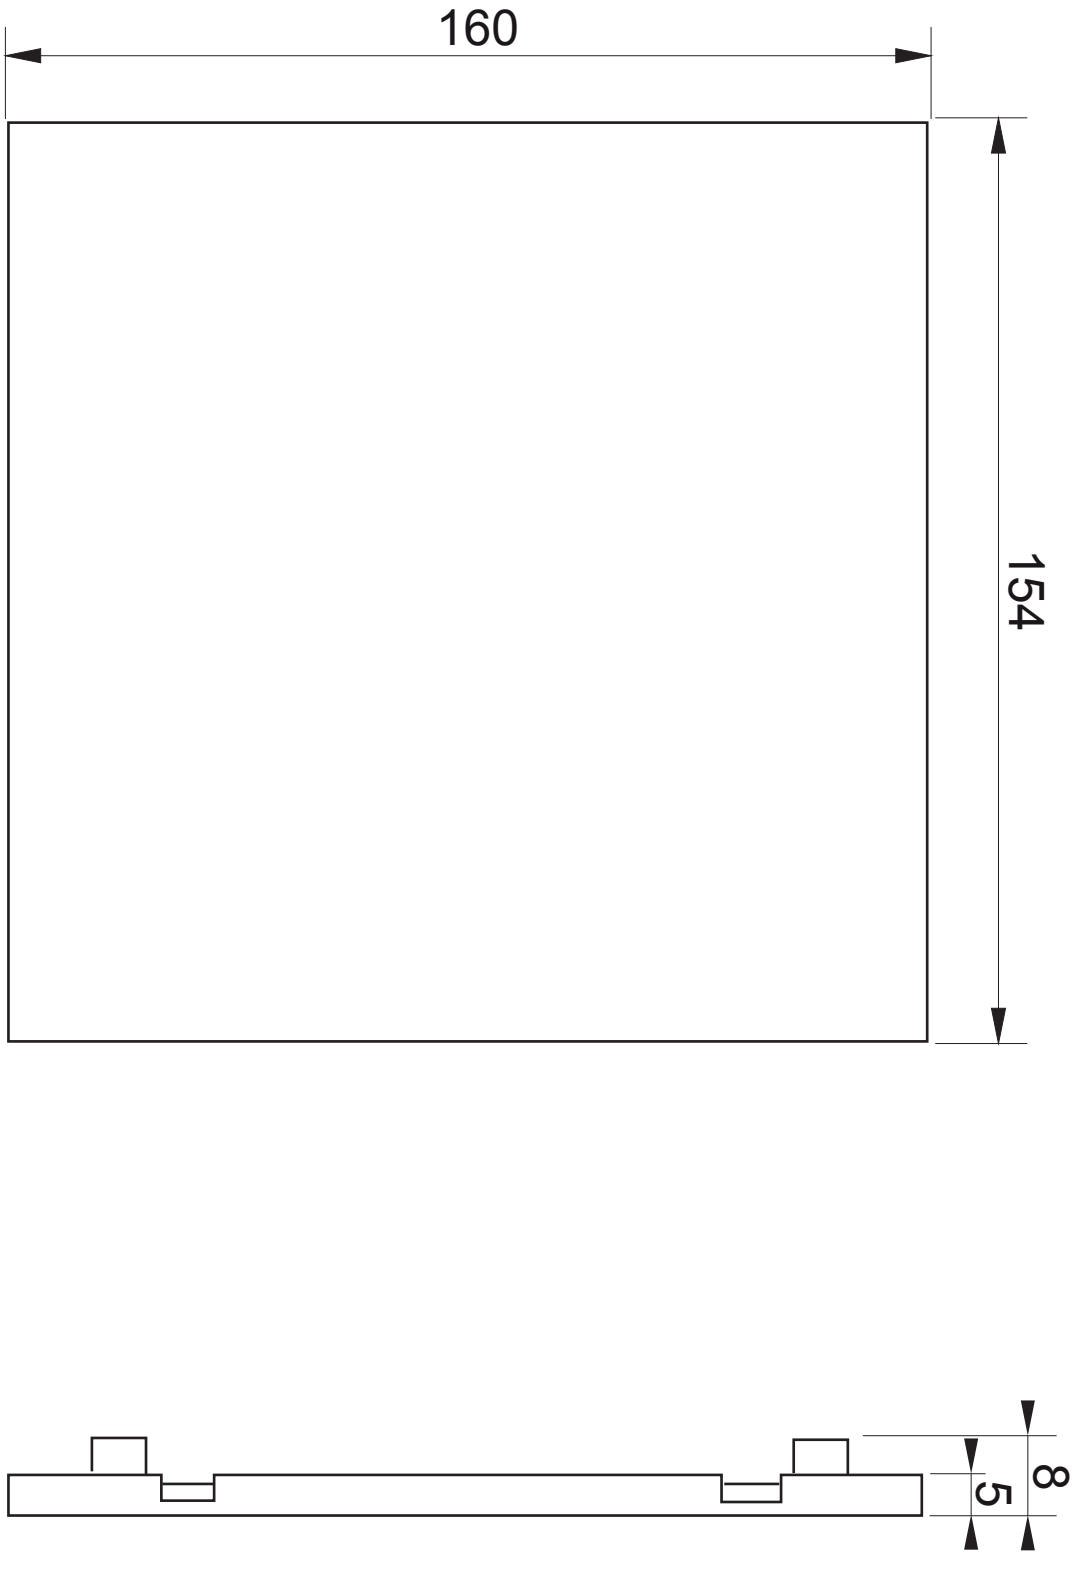
160
154
8
5