

Downlight 703.22 Square Comfort 2700 K Spot White

REF. 70322030-282



BASIC INFORMATION

APPLICATION

Hotel, Restaurants, Residential, Retail, Office, Healthcare, Education

PACKAGING CONTENTS

1 unit

ETIM CLASS

EC001744

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

CRI

80

LUMENS (LM)

680 lm

IP RATING

IP44

CUT OFF

No

LUMENS/W

680 lm/7.5 W

OPERATING TEMPERATURE RANGE (°C)

15 - 35 °C

DRIVER INCLUDED

Yes

OPTICS

Spot

POWER SUPPLY (V~)

230 V~

L70 (°C)

30,000 h at 25 °C

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

COLOR TEMPERATURE (K)

2700 K

LIGHT BEAM APERTURE ANGLE (°)

20°

POWER (W)

7.5 W

CONTROL

On/Off

LIGHTING EFFICIENCY (LM/W)

91 lm/W


SERVICE LIFE

30.000 h


CHROMATICS CRI ICONS

CRI
80

PHOTOMETRY ASSETS – CONICAL

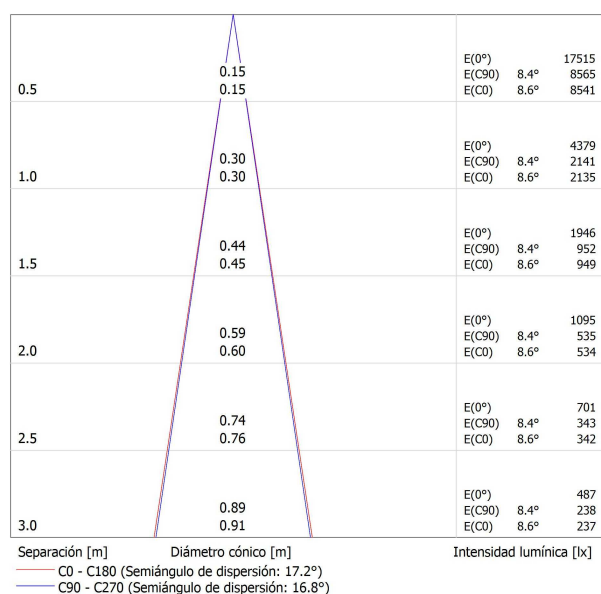

PHOTOMETRY ASSETS – POLAR

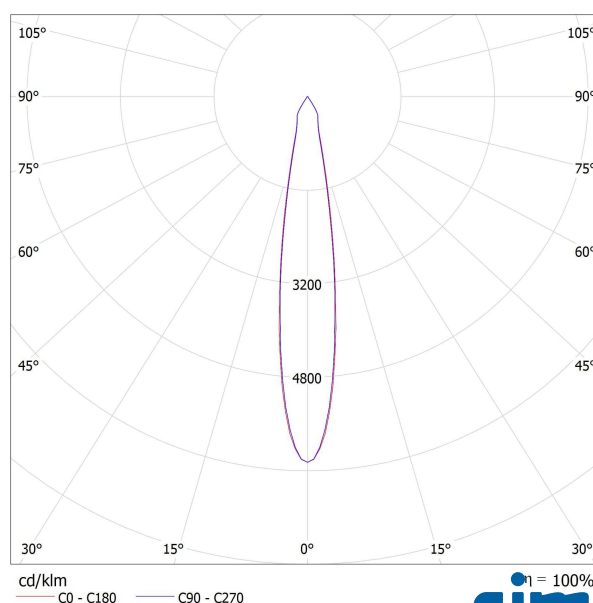

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Flush-mount

REGULATIONS

WARRANTY

3 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053088555

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.345

PRODUCT NET WEIGHT

0.225

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053088555

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

110

PACKAGING WIDTH

135

PACKAGING LENGTH

170

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

2524500

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.345

PACKAGING NET WEIGHT

0.225

PACKAGING WEIGHT UNIT

KGM