


Blinds switch 230V~ with 3 positions: up, down and stop gold Simon 270

REF. 20000333-095

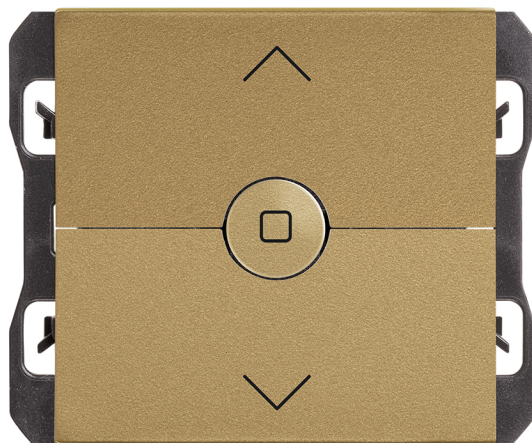

BASIC INFORMATION

FINISH

Matt gold

MATERIAL

Thermoplastic

PACKAGING CONTENTS

3-position Blinds Switch

SYMBOL

Arrow

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000044

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 A	OPERATING TEMPERATURE RANGE (°C) 5 - 45 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	POWER SUPPLY (V~) 230 V~
NUMBER OF POSSIBLE ELEMENTS 1 element	LATCH TYPE Electric	RAL 1036
FREQUENCY 50 - 60 Hz	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	STORAGE TEMPERATURE RANGE (°C) -20 - 85 °C
INDICATOR FUNCTION No	TYPE OF MECHANISM Pivoting	VOLTAGE (V~) 127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 15	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for flush mounting
	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053283295

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.04

PRODUCT NET WEIGHT

0.04

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053283301

UNITS CONTAINED PACKAGING

5

PACKAGING HEIGHT

47.75

PACKAGING WIDTH

57

PACKAGING LENGTH

261

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

710376.75

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.04

PACKAGING NET WEIGHT

0.2

PACKAGING WEIGHT UNIT

KGM

