


2-way rotary dimmer switch 40 to 500W/VA white Simon 27 Play

REF. 27313-35

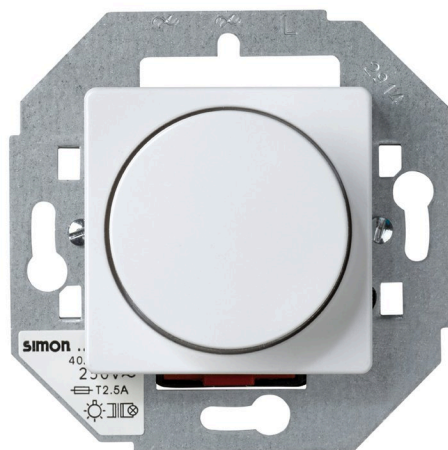

BASIC INFORMATION

DESCRIPTION

For greater efficiency linked to the most avant-garde design, Simon 27 pay offers the regulator 2-way switch rotary light, with the that will be monitored by the light intensity of any space. With a few finishes in a discreet and stylish colour, this - white regulator 2-way switch is compatible with a voltage of 230 Volt and power from 40 to 500 W / VA. Consists of 2 modules for 1 element, in a size of 45 x 45 mm, with 3 pins, 2 wires and 1 adjustable circuit. Its electronic components are isolated with halogen-free and thermoplastic trim of the same material, to guarantee protection in case of fire. It can reach maximum temperatures of -20 to 75 °C. Its installation is designed to be recessed or surface-mounted, with screw terminal connection and a cable section cross-section of 1.5 to 2.5 mm and stripping of 5 mm With this mechanism, it is not possible to connect two electronic voltage regulators in the same circuit.

FINISH

White

COMPATIBLE WITH 230V INCANDESCENT AND HALOGEN LAMPS (W)

500 W/VA

COMPATIBLE WITH MECHANICAL SWITCH

No

COMPATIBILITY

Simon 27 Play, Simon 27 Neos,
Simon 27 Scudo, Simon 27 and
Simon 44 Aqua frames

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

PACKAGING CONTENTS

Dimmer and instruction sheet

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

Yes

ETIM CLASS

EC000025

REMARKS

Two main electronic voltage regulators cannot be connected in the same circuit.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	COMPATIBLE WITH FLUORESCENT LAMPS WITH 1- 10V DIMMABLE ELECTRONIC BALLAST No	TYPE OF MECHANISM Rotary
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm		MINIMUM POWER (W) 40
NUMBER OF CONTACTS 3	COMPATIBLE WITH FLUORESCENT LAMPS (VA) No	COMPATIBLE WITH MOTORS (VA) No
NUMBER OF CONTROLLABLE CIRCUITS 1	INDICATOR FUNCTION No	OPERATING TEMPERATURE RANGE (°C) 0 - 40 °C
COMPATIBLE WITH HALOGENS WITH ELECTROMAGNETIC TRANSFORMER (W) 350 W	IP RATING IP20	POWER SUPPLY (V~) 230 V~
COMPATIBLE WITH ELECTRONIC AUXILIARY No	COMPATIBLE WITH LOW CONSUMPTION (W) No	STORAGE TEMPERATURE RANGE (°C) -20 - 75 °C
COMPATIBLE WITH HALOGENS WITH ELECTRONIC TRANSFORMER (W) No	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	TYPE 2-way dimmer switch
NUMBER OF POSSIBLE ELEMENTS 1 element	MAXIMUM POWER (W) 500	VERSION Single
	MAXIMUM QUANTITY PER CIRCUIT 1	NUMBER OF WIRES 2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 5	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal and American	INSTALLATION TYPE Suitable for surface and flush mounting
--	--	---

CLAW
Included

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-2-1:2004 + EN 60669-2-1:2004 A1:2009 + EN 60669-2-1:2004 A12:2010

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

56.2

UNITARY PACKAGING GROSS WEIGHT

155

PACKAGING LENGTH

76

UNITARY PACKAGING WIDTH

71

PRODUCT NET WEIGHT

132

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING LENGTH

71.2

UNITARY PACKAGING WEIGHT UNIT

GRM

PACKAGING VOLUME

0.329

UNITARY PACKAGING MEASUREMENT UNIT

MMT

PACKAGING EAN

8421053011591

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0.284

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.155

UNITARY PACKAGING VOLUME UNIT

DMQ

PACKAGING HEIGHT

57

PACKAGING NET WEIGHT

132

PACKAGING WIDTH

76

PACKAGING WEIGHT UNIT

KGM