


Group with 1 two-way switch 10 AX 250V~ and 1 push button 10 A 250V~ with quick terminal connection Simon 75

REF. 75301-39

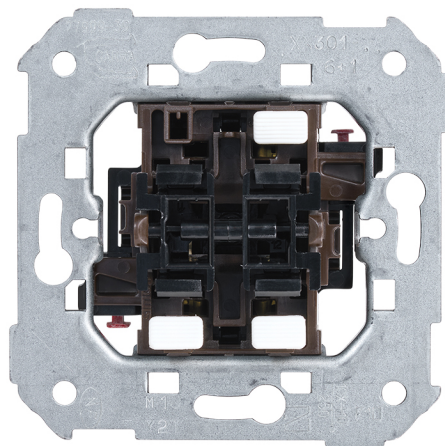

BASIC INFORMATION

DESCRIPTION

Providing an accurate response to the new market demands is one of the objectives of all the people working at Simon. With this goal in mind, the Group of a 10 AX 250V~ two-way switch and a 10 A 250V~ push button with a quick terminal connection system from the Simon 75 series has been created. Its easy and quick installation is one of its attractions, being suitable for surface and flush mounting. It is a mechanism valid for Simon 75 and 82 series, and its installation should be carried out in a universal socket base vil544. It is designed to withstand extreme environmental conditions thanks to the metallic components made with halogen-free thermoplastic insulation. Its technical characteristics are complemented by a wire section of 0.2 to 0.5 mm and a wire stripping length of 11 mm. Maximum quality at the best price.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82
Detail, Simon 82 Nature, Simon
82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC002846

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX + 10 A	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) 1.5 - 2.5	IP RATING IP20	RECESS DIMENSION (MM) 30
NUMBER OF CONTACTS 5	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 5

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 15	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast
REMOVAL OF COVER Only with tool		

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255957

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3026595

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.066

PRODUCT NET WEIGHT

0.066

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003688

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.75

PACKAGING NET WEIGHT

0.66

PACKAGING WEIGHT UNIT

KGM

