

16 A 250 Vac schuko socket with USB 2.1 5 V / DC category A female charger with screw connection system Simon 100

REF. 10001432-039



BASIC INFORMATION

FINISH

Black

PACKAGING CONTENTS

Mechanism and instructions

COMPATIBILITY

Frames Simon 100

ETIM CLASS

EC000125

TECHNICAL INFORMATION

AVAILABLE MARKET CE	IP RATING IP20	USB CHARACTERISTICS 10W
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	TYPE OF MECHANISM Insertion	USB CURRENT (A) 2,1 A
NUMBER OF POSSIBLE ELEMENTS 1 element	OPERATING TEMPERATURE RANGE (°C) 0 - 40 °C	USB VOLTAGE (V~) 5 Vdc
FORMAT Schuko,USB	POWER SUPPLY (V~) 250 V~	VERSION Individual
INDICATOR FUNCTION No	STORAGE TEMPERATURE RANGE (°C) -25 - 75 °C	VOLTAGE (V~) 250 V~
CURRENT (A) 16 A		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX universal	INSTALLATION TYPE Suitable for recreation
CLAW	INSTALLATION DIRECTION Horizontal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 1 click connection (1 click®)

REGULATIONS

REGULATIONS

UNE 20315-1-1:2009; UNE 20315-1-2:2009; IEC 60884-1 Ed 3.2; EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2011; ETSI-EN 301489-34 V1.4.1; EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053194966

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.084

PRODUCT NET WEIGHT

0.084

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053194966

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

55

PACKAGING WIDTH

65

PACKAGING LENGTH

65

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

232375

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0.084

PACKAGING NET WEIGHT

0.084

PACKAGING WEIGHT UNIT

KGM

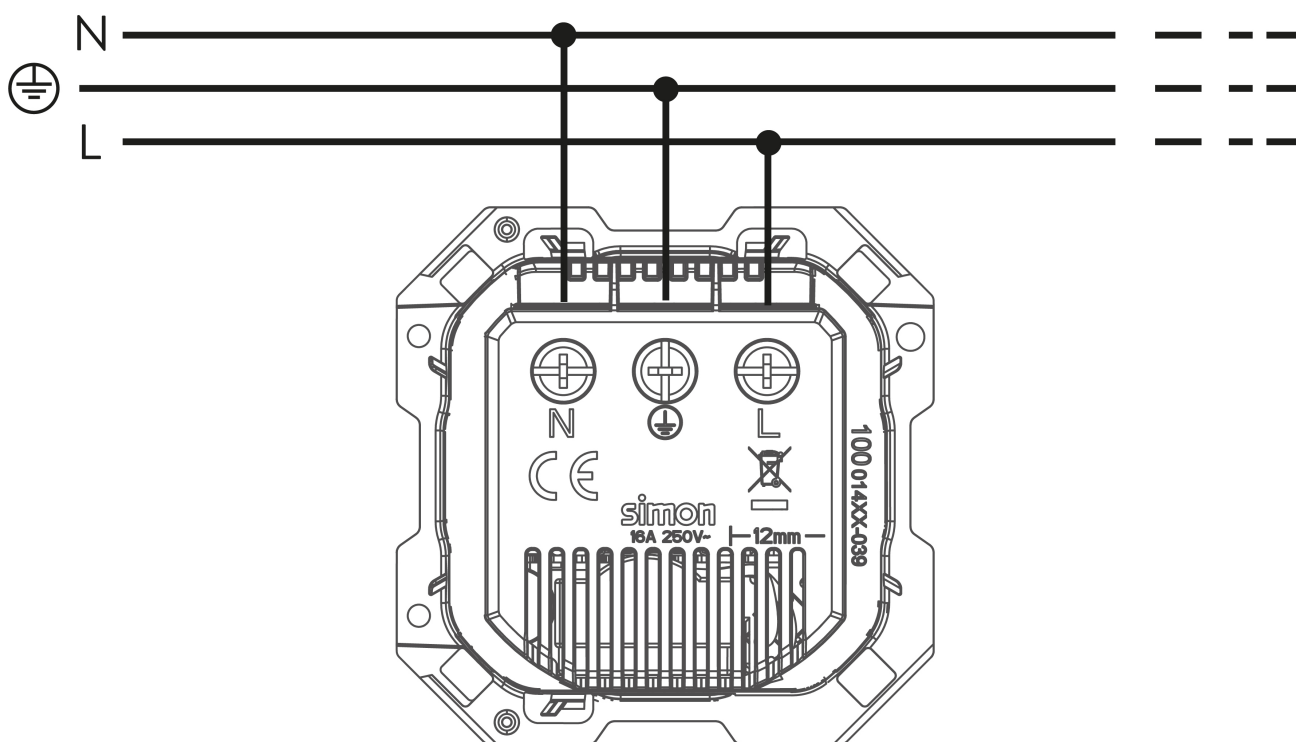

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet