Service cover for 4 elements for installation in concrete or raised floor grey Simon 500 Cima

REF. **52054102-035**



BASIC INFORMATION

DESCRIPTION

The Simon 500 Cima series presents our kit adjustable floor box for 2 elements whose design has been designed to be recessed in raised floor. The piece measures 132x187x92 mm, an end in graphite finish and is made of metal materials with halogen-free coated self-extinguishing halogen-free thermoplastic to ensure in case of fire that the flame spread, it is not a extremely low toxicity in the event of smoke generation. And it is that, among the values of the brand, is the always offer the highest quality of its products thanks to its constant interest by improve them. This is materialize in its collection Simon 500 Cima, which gives assemble solutions for those who are looking for a total security without renouncing the best mechanisms functional on the market.

FINISH

Grey

MATERIAL

Plastic

PACKAGING CONTENTS

Service cover and installation manual

ETIM CLASS

EC001903

REMARKS

Once the product has been installed, you have the option to combine it with the flush-mounting cover (ref.52053102-035) in cases where you do not install the same floor covering.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
4 modules

RAL
7011

RECESS DIMENSION (MM)
170 x 155 mm

VERSION
4 elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 14 and 54 mm

NUMBER OF COVER OPENING POSITIONS
2

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using fastening claws on the concrete floor tray or the raised floor tile (provided in the service cover)

CAN BE INSTALLED IN TRAY
Plástica

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised floor and concrete floor

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101605

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.775

PRODUCT NET WEIGHT

0.775

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053101605

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

84

PACKAGING WIDTH

181

PACKAGING LENGTH

212

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3.223

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

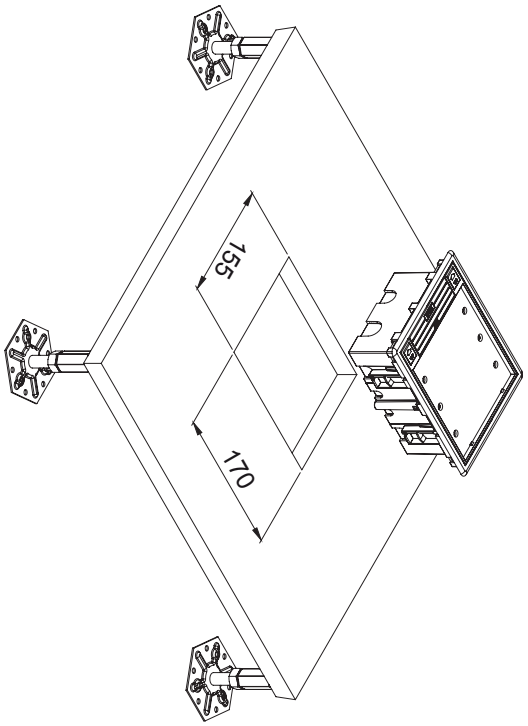
0

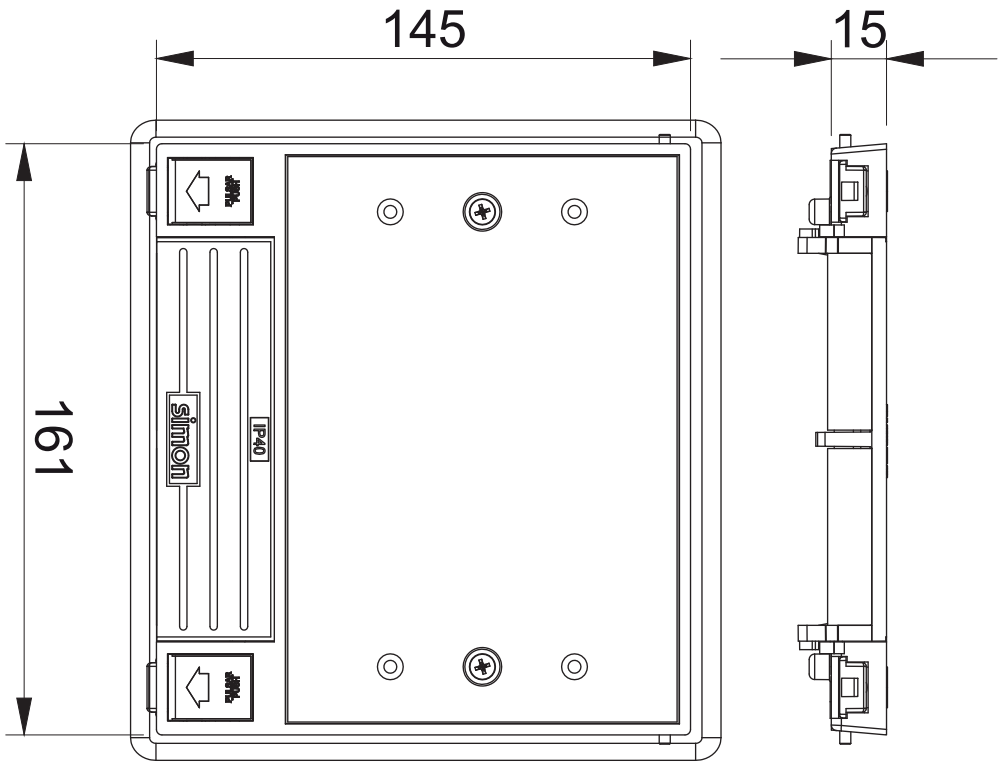
PACKAGING NET WEIGHT

0.775

PACKAGING WEIGHT UNIT

KGM


155
170


145
15
161
simon
IP40