


Bus coupling unit with KNX system

REF. 8400100-039

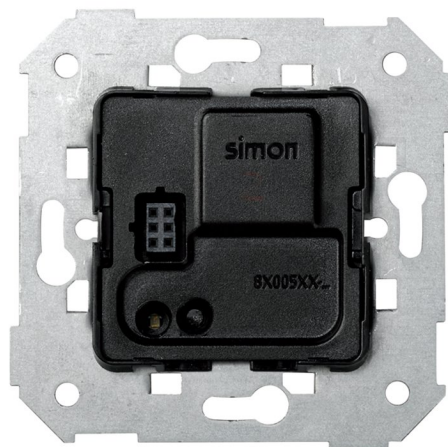

BASIC INFORMATION

PACKAGING CONTENTS

Coupling unit and instructions

ETIM CLASS

EC000634

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

No

INPUT CABLE SECTION ADMITTED (MM)

From 0.5 to 2.5 mm

INPUT INTENSITY (MA)

6

INPUT TYPE

Digital, volt-free

CURRENT (A)

34 mA

IP RATING

IP20

MAXIMUM VOLTAGE AT THE INPUT (VCC)

24 V DC

OPERATING TEMPERATURE RANGE (°C)

0 - 45 °C

POWER SUPPLY (V~)

Bus KNX (21 Vcc...32 Vcc)

PROTOCOL

KNX

PROGRAMMING PUSH BUTTON

Yes

RELATIVE HUMIDITY

From 20 to 85% (without condensation)

STORAGE TEMPERATURE RANGE (°C)

25 - 70 °C

INSTALLATION AND MAINTENANCE

BUS CABLE SECTION ADMITTED (MM)

From 0.5 to 0.8 mm

CABLE STRIPPING NECESSARY (MM)

8

INSTALLATION TYPE

Suitable for surface and flush mounting

BUS CONNECTION TYPE OF TERMINAL CONNECTION

Por inserción

CLAW

Optional

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-2-5:2016

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053129265

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.08

PRODUCT NET WEIGHT

0.08

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053129265

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

57

PACKAGING WIDTH

76

PACKAGING LENGTH

76

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

0.329

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.09

PACKAGING NET WEIGHT

0.08

PACKAGING WEIGHT UNIT

KGM