

Push-button switch with light symbol 10A 250V~ for half element with fast terminal connection system ivory Simon 27 Play

REF. 27151-61



BASIC INFORMATION

DESCRIPTION

The Simon 27 play series is a revolutionary concept in the world of products related to electrical and electronic systems. All the articles included in this range take care of detail and create the ideal atmosphere for a home or company thanks to its wide range of colours and innovative design. In it we find the Push-button switch with 10 A intensity light and 250V~ voltage of half an element and fast-terminal connection system in ivory finish. With dimensions of 22.5x45 mm, this push-button switch has been manufactured with metal components with halogen-free insulation and thermoplastic trim, materials that give extra resistance to the passage of time, which is coupled with its easy cleaning to prevent oxidation of its structure, this piece supports a wire cross section of 1.5 to 2.5 mm and is suitable for both surface-mounted or to be recessed.

FINISH

Ivory

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

Half element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small spaces and Centralisations

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251607

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

1229865

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.023

PRODUCT NET WEIGHT

0.023

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053035627

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

53

PACKAGING WIDTH

105

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1229865

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.46

PACKAGING NET WEIGHT


0.46

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

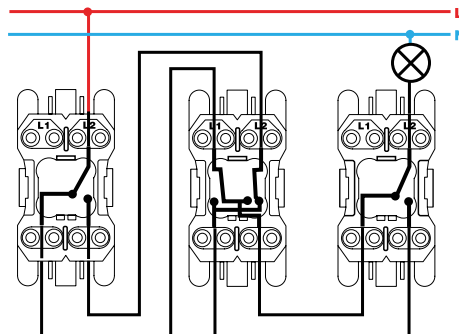


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

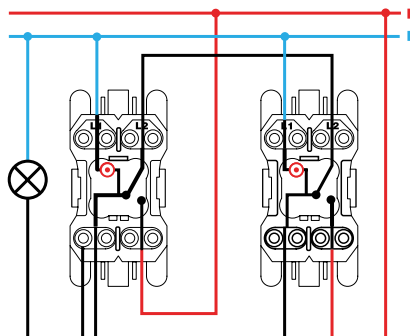


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

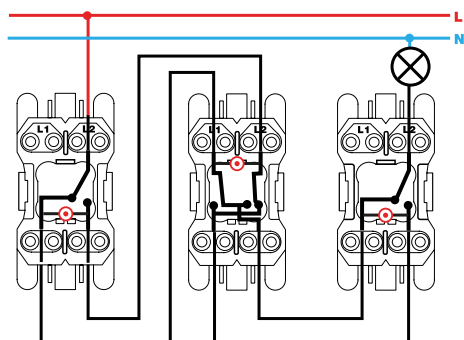

Conmutador cruce / Intermediate switch
XX2700254-XX