# 2-way switch/push button with key 5A 250V~ (key removable in rest position) and welding terminal connection system

REF. **75520-39**

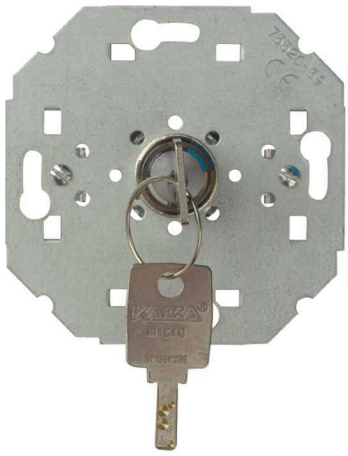

## BASIC INFORMATION

### DESCRIPTION

Security, functionality and design within the 2-way switch / push-button switch of the Simon 75 collection. Colours the latest technology in lighting and the latest trends in decoration, the Simon 75 range is to each space, the specific finishes to allow the integration of the set in all kinds of environments. This 2-way switch / push-button switch is 1 mechanism equipped with 2 positions and a key blade that can be removed in the idle, with which you will obtain the maximum security in the minimum space compact. With a power of 250 Volt voltage and 5 Ampere current with amplitude modulated (5: 00 AM), supports a cable section of 0.5 mm Made of metal materials with halogen-free thermoplastic isolated, it offers a greater security against fire, reaching maximum temperatures of -25 to 50 °C. Designed for installation both recessed and surface-mounted, requires terminal connection by welding to complete the assembly and be fully in the specific space.

### COMPATIBILITY

Simon 28, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

### PACKAGING CONTENTS

Mechanism

### REMARKS

Mechanism with 2 positions and removable key in rest position.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### CABLE SECTION ADMITTED (MM)

0,5 mm

### NUMBER OF POSSIBLE ELEMENTS

1 element

### INDICATOR FUNCTION

No

### CURRENT (A)

5 A

### IP RATING

IP20

### KEY-REMOVAL POSITION

Standby

### TYPE OF MECHANISM

Key

### NOMINAL VOLTAGE (V~)

250 V~

### OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

### STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

### VERSION

Single

## INSTALLATION AND MAINTENANCE

### CLAW
Included

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

### INSTALLATION TYPE
Suitable for surface and flush mounting

### TYPE OF TERMINAL CONNECTION - FUNCTION 1
Welding

## REGULATIONS

### REGULATIONS
Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + + EN 61058:2002 + EN 61058:2002 A2:2008 + EN 61058-2-1:2011

## LOGISTICS INFORMATION

UNITARY EAN CODE
8421053004814

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
329232

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.085

PRODUCT NET WEIGHT
0.085

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053004814

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
57

PACKAGING WIDTH
76

PACKAGING LENGTH
76

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
329232

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.085

PACKAGING NET WEIGHT
0.085

PACKAGING WEIGHT UNIT
KGM