Double-pole switch 16AX 250V~ for half element with pilot light and screw terminal connection system white Simon 27 Play

REF. **27134-64**



BASIC INFORMATION

DESCRIPTION

It is a double-pole switch 16AX 250V ~, half element, with pilot light that is included in the Simon 27 Play series, finished in white, this article, measures 22.5x45 mm and has been manufactured in compliance with the regulation. It consists of metal components with insulation in halogen-free thermoplastic material and trim made of thermoset plastic. The switch is suitable for surface or flush mounting installation. Offers screw terminal connection system, a formula quick and easy for the user, is compatible with the frames of the series Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralizations and Simon 44 Aqua. For proper maintenance, the ideal is to clean this mechanism with a soft and dry cloth. Also, it is recommended to avoid the use of abrasive cleaning products containing chlorine, as they could damage the switch.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)
0.55 mA

NUMBER OF POSSIBLE ELEMENTS
Half element

INDICATOR FUNCTION
Yes

CURRENT (A)
16 AX

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Pivoting

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American, Small spaces and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
365040

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.035

PRODUCT NET WEIGHT
0.035

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053075579

UNITS CONTAINED PACKAGING
5

PACKAGING HEIGHT
54

PACKAGING WIDTH
52

PACKAGING LENGTH
130

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.012

PACKAGING VOLUME UNIT
HLT


PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.175


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

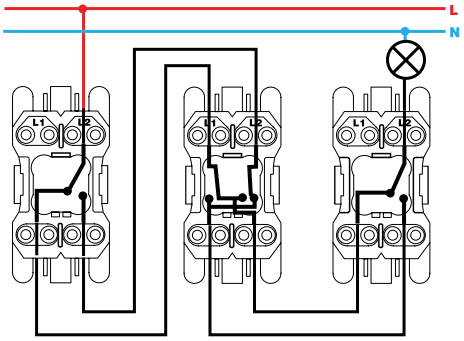


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

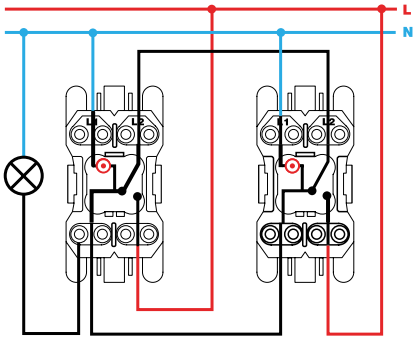


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

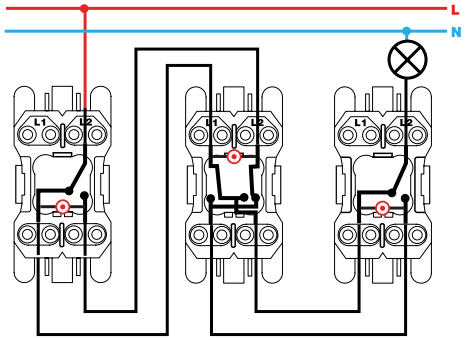

Conmutador cruce / Intermediate switch
XX2700254-XX