Flush-mount wall box for 6 double elements supplied in multiple Simon 500 Cima packaging

REF. **51020706-039**



BASIC INFORMATION

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms using a specific adaptor

PACKAGING CONTENTS

Flush-mount wall box, protective cover for box, metal partition wall and film for covering the pre-punched items on the box

ETIM CLASS

EC002601

REMARKS

The flush-mount box can be used as a template during installation thanks to the guides for marking the perimeter of the box

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
1, 2, 3, 4 and 6 double elements

NUMBER OF CLAMP-HOLDER HOLES
22

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)
+90 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housing fitted into the box for this purpose.

NUMBER OF ENCLOSURES FOR GROUND CONNECTION
2

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

IK CLASSIFICATION
07

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
12

NUMBER OF PRE-PUNCHED HOLES 30 X 70 MM
2

RECESS DIMENSION (MM)
388 x 141 mm

NUMBER OF SIDE ENTRANCES
2

VERSION
6 double elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 4 and 30 mm

REMOVAL OF COMPONENTS
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the claws included in the enclosure, in combination with aggregates, binders, additives, etc.

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for flush mounting on the wall

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-1:2005

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

3.9

PRODUCT NET WEIGHT

3.9

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053114124

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

220

PACKAGING WIDTH

400

PACKAGING LENGTH

430

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

9.996

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0


PACKAGING NET WEIGHT

39


PACKAGING WEIGHT UNIT

KGM

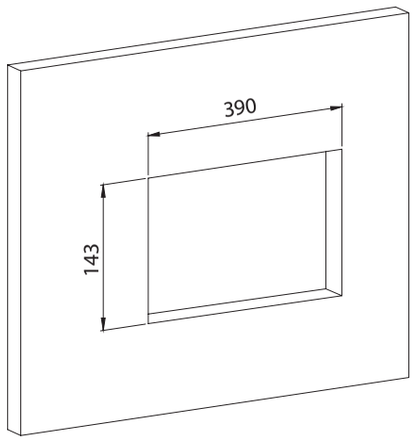




Tabique obra



Tabique hueco

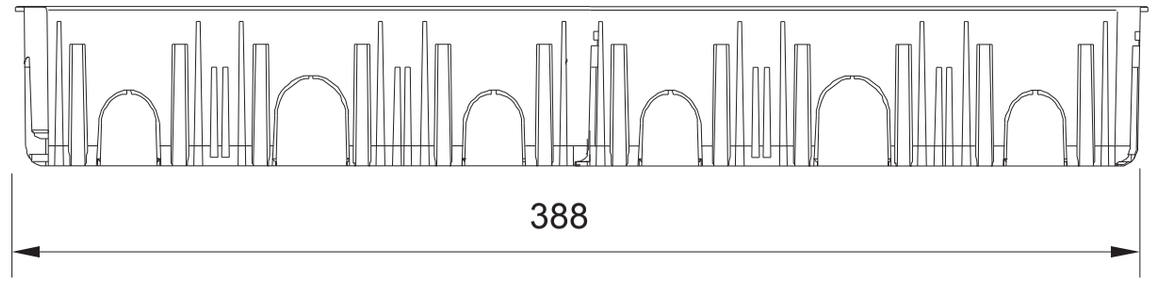

•Grosor pared de 4 a 30mm

