


Simon NEON Column Charging Point with 2 Spiral 4m T2 Cables Single-phase 7.4 kW – Max. 14.8 kW + 4G Modem

REF. 0621233-100

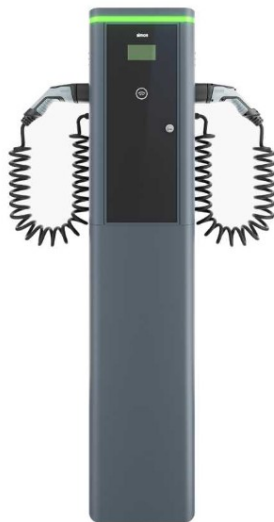

BASIC INFORMATION

DESCRIPTION

Charging point SIMON Serie NEON STREET, column-mounted. Double 4 m spiral cable with type 2 connector. Socket holder for the charging cable. Power per socket of 7,4 kW, maximum power of 14,8 kW (Single-phase 230 V, 50 Hz) with smart balancing between sockets. Mode 3 charging according to EN 61851-1. Charging power of the charging station configurable via software. Dynamic master-slave management system between charging points with power management capability. Compatible with SIMON Electron Manager and with the SPL accessory. 360° LED ring with status indication by color code. RFID card reader ISO 14443A/Mifare – 13.56 MHz. 10 cards included for the use of the charging point. Meter per socket with MID certification. Communications RS-485/Ethernet. Protocol OCPP 1.5, 1.6 JSON and Modbus TCP. Includes 4G communication modem with antenna. Stainless steel enclosure IK10 and IP54 suitable for indoor or outdoor installation, dimensions 1390 x 340 x 180 mm and anti-vandal protection with double security bumping-type key. Polycarbonate front with anti-scratch treatment. Internal safety system for disconnection of electronics in case of door opening. Electrical protection included per socket: residual current device (RCD) Class A with sensitivity 30 mA and miniature circuit breaker (MCB) Curve C. Standard finish painted in long-lasting HYDECO polyester epoxy powder.

FINISH

Powder coated

OPERATING ENVIRONMENT

Retail,Hotel,Public road,City councils,Parking

APPLICATION

Retail,Hotel,Public road,City councils,Parking

ETIM CLASS

EC002883

TECHNICAL INFORMATION

4G COMMUNICATION MODEM

Included

IK CLASSIFICATION

10

MODE 3 STATUS INDICATOR

Yes

CONNECTOR TYPE

2x 4m spiral cable T2 7.4 kW

CURRENT (A)

32 A

NUMBER OF OUTLETS

2

ELECTRICITY METER

Yes

IP RATING

IP54

TOLERANCE (%)

10

FREQUENCY

50 Hz

TYPE OF LINE

Single-phase

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | Dir. 2014/53/UE RED EN IEC 61851-1:2019 | EN IEC 61851-21-2:2021 | EN 62196-2:2017 | EN IEC 63000:2018 | ETSI EN 300 328 v2.2.2

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053288924

UNITARY PACKAGING HEIGHT

210

UNITARY PACKAGING WIDTH

545

UNITARY PACKAGING LENGTH

1420

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

170258000

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

41

PRODUCT NET WEIGHT

41

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053288924

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

210

PACKAGING WIDTH

545

PACKAGING LENGTH

1420

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

162519000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

41