

USB C charger 20W Power Delivery aluminium Simon 270

REF. 20000382-093



BASIC INFORMATION

DESCRIPTION

USB C charger 20W Power Delivery from the Simon 270 series, with one type C fast-charging port for mobile devices. Cable cross-section from 1.5 to 2.5 mm, with 7 mm of stripped cable and screw terminals. Made of thermoplastic, it measures 45 x 45 mm. Suitable for flush mounting in a universal back box, in a vertical or horizontal position. Protection rating IP20. Frequency from 50 to 60 Hz. Operating temperature range: 0 to 35 °C. Storage temperature range: -25 to 50 °C. Clean with a soft, dry cloth, avoiding abrasive or chlorine-based cleaners. Up to 9 available finish colours: 090 Glossy White; 190 Matte White; 091 Copper; 093 Aluminium; 094 Champagne; 095 Gold; 096 Titanium; 097 Bronze; 098 Matte Black.

FINISH

Matt aluminium

MATERIAL

Thermoplastic

ETIM CLASS

EC002949

SYMBOL

PD

COMPATIBILITY

Simon 270 frames

TECHNICAL INFORMATION

AVAILABLE MARKET CE	MONOBLOCK No	USB MAXIMUM POWER (W) 20
CONNECTOR TYPE USB C	NOMINAL VOLTAGE (V~) 230 V~	USB CURRENT (A) 3.0 A
FORMAT USB	OPERATING TEMPERATURE RANGE (°C) 0 - 35°C	USB PORT TYPE C
FREQUENCY 50 - 60 Hz	POWER SUPPLY (V~) 127/230 V~	POWER DELIVERY USB Yes
IP RATING IP20	RAL 9006	VOLTAGE (V~) 127/230 V~
MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	USB CHARACTERISTICS 5,0 VDC 3,0 A 15,0W 9,0 VDC 2,2 A 20,0W 12,0 VDC 1,7 A 20,0W	

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 7	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Screw
-------------------------------------	--	---

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | Dir. 2011/65/UE RoHS + post. mod | EN 50563:2011 + A1:2013 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN IEC 62368-1:2020 + A11:2020 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 63000:2018 | EN IEC 61000-6-1:2019 | EN IEC 61000-6-3:2021

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053353288

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.057

PRODUCT NET WEIGHT

0.043

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053353288

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

55

PACKAGING WIDTH

40

PACKAGING LENGTH

65

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

143000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0.057

PACKAGING NET WEIGHT

0.043

PACKAGING WEIGHT UNIT

KGM

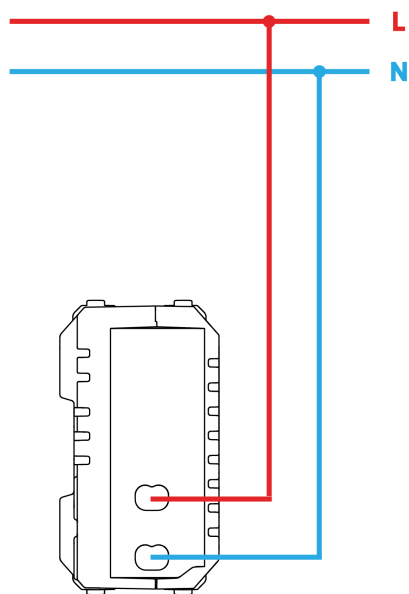

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet