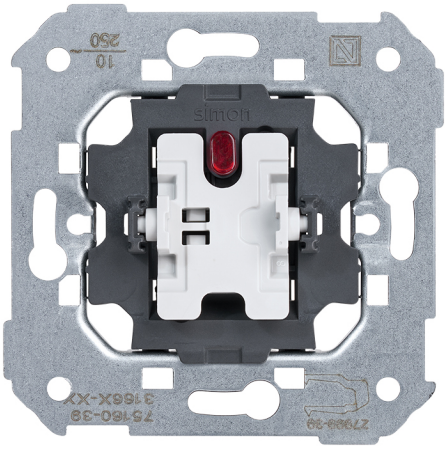
Push button 10 A 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. **75160-39**



BASIC INFORMATION

DESCRIPTION

Push button with an intensity of 10 A and operates with a power of 250 V~ with an integrated light indicator, and for its installation, it includes a quick terminal connection system. You can find the element in the "control mechanisms" category within the Simon 75 series. To facilitate installation, it is suitable for flush-mounted or surface; choose the option that best fits your needs. Enjoy the multiple color combinations that the Simon 75 series has for you, an endless array of options suitable for any corner of your home. Incorporate the most advanced electronic functions for total control of your home in any part of your house. In addition, in terms of customization options, you can play with both finishes and shapes. Offering the possibility of adopting two different aesthetic shapes thanks to its rectangular trim frame.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)
1 mA

NUMBER OF CONTACTS
2

NUMBER OF POSSIBLE ELEMENTS
1 element

FREQUENCY
50 Hz

INDICATOR FUNCTION
Yes

IP RATING
IP20

LINKABLE
No

TYPE OF MECHANISM
Pivoting

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
40

VERSION
Single

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
2

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION
Por inserción

CABLE STRIPPING NECESSARY (MM)
15

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053255827

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.06

PRODUCT NET WEIGHT
0.06

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053003572

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
83

PACKAGING WIDTH
165

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

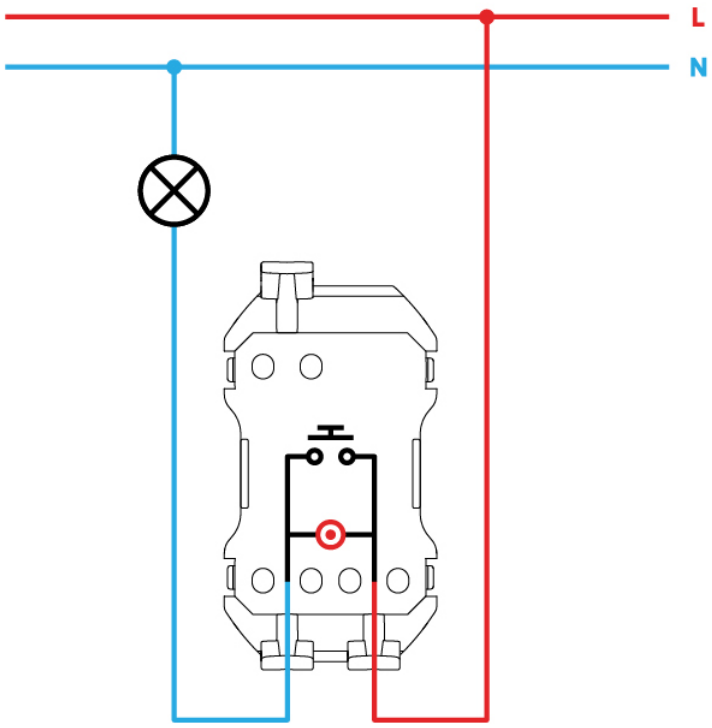
PACKAGING VOLUME
3026595

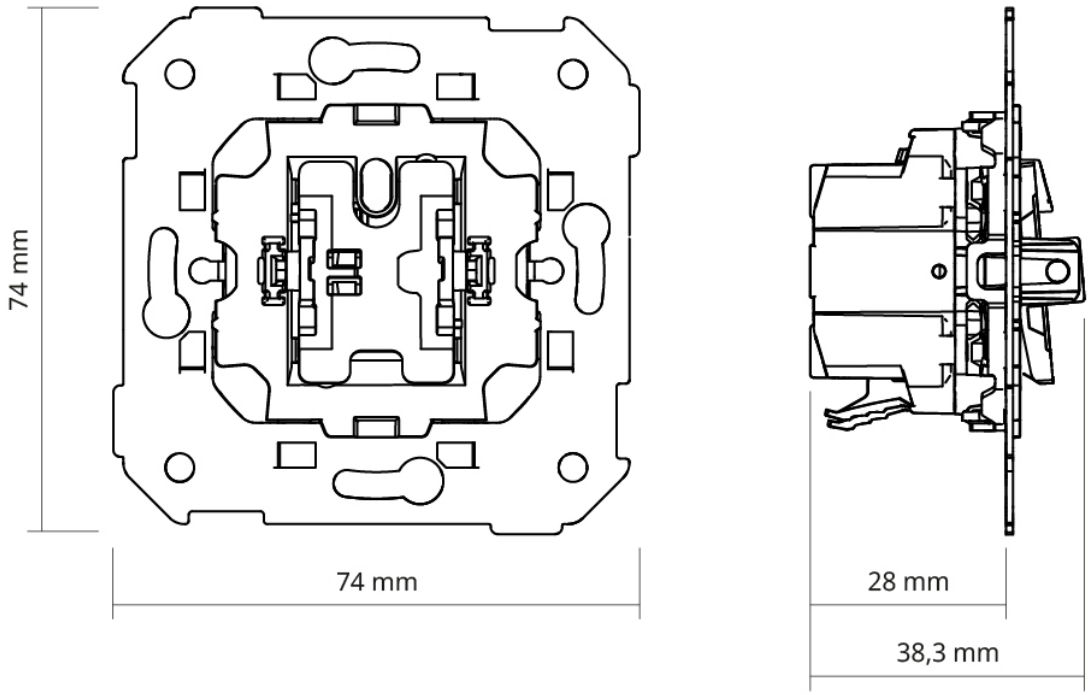
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.6

PACKAGING NET WEIGHT
0.6

PACKAGING WEIGHT UNIT
KGM


L
N


74 mm
74 mm
28 mm
38,3 mm