Aluminium mini column with 1 side for 8 elements graphite Simon 500 Cima

REF. **52550114-033**



BASIC INFORMATION

DESCRIPTION

The mini column of the Simon 500 Cima range is made up of a side with capacity to supply power to a total of eight elements or devices. It comes in a modern aluminium colour of great innovation that will be perfect anywhere in the room where it is. The dimensions of the mini-column are 574 x 110 millimetres and 72 millimetres of depth and consists of 8 modules. It is a product very easy to install, it is also very versatile, since it is suitable for all types of floor, concrete or raised, thus increasing your options. The anodised aluminium of which it is composed is of the highest quality and gives a hardness and resistance to the product,greater than normal aluminium. This contributes to extending the service life of the product. The maintenance of the device is very easy to carry out and you only need to use a dry and soft cloth, without the need for additional cleaning products.

FINISH

Aluminium

MATERIAL

Aluminium

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+120 °C

EARTHING RESISTANCE
< 0.05 Ohms

ELECTRICAL PROPERTIES
With electrical continuity

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to +120 °C

NUMBER OF MODULES
8

VERSION
1 side

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF TRIM FRAMES
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094396

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.785

PRODUCT NET WEIGHT
1.785

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094396

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
85

PACKAGING WIDTH
128

PACKAGING LENGTH
1137

PACKAGING MEASUREMENT UNIT
MMT

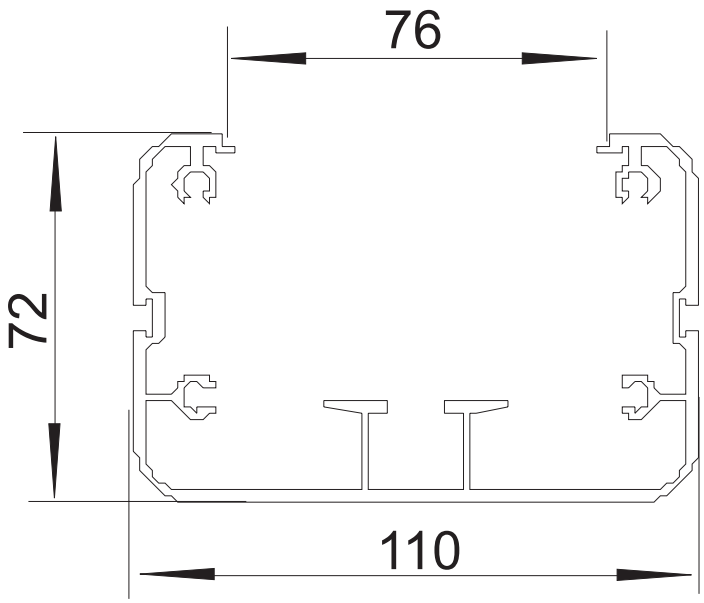
PACKAGING VOLUME
12370560

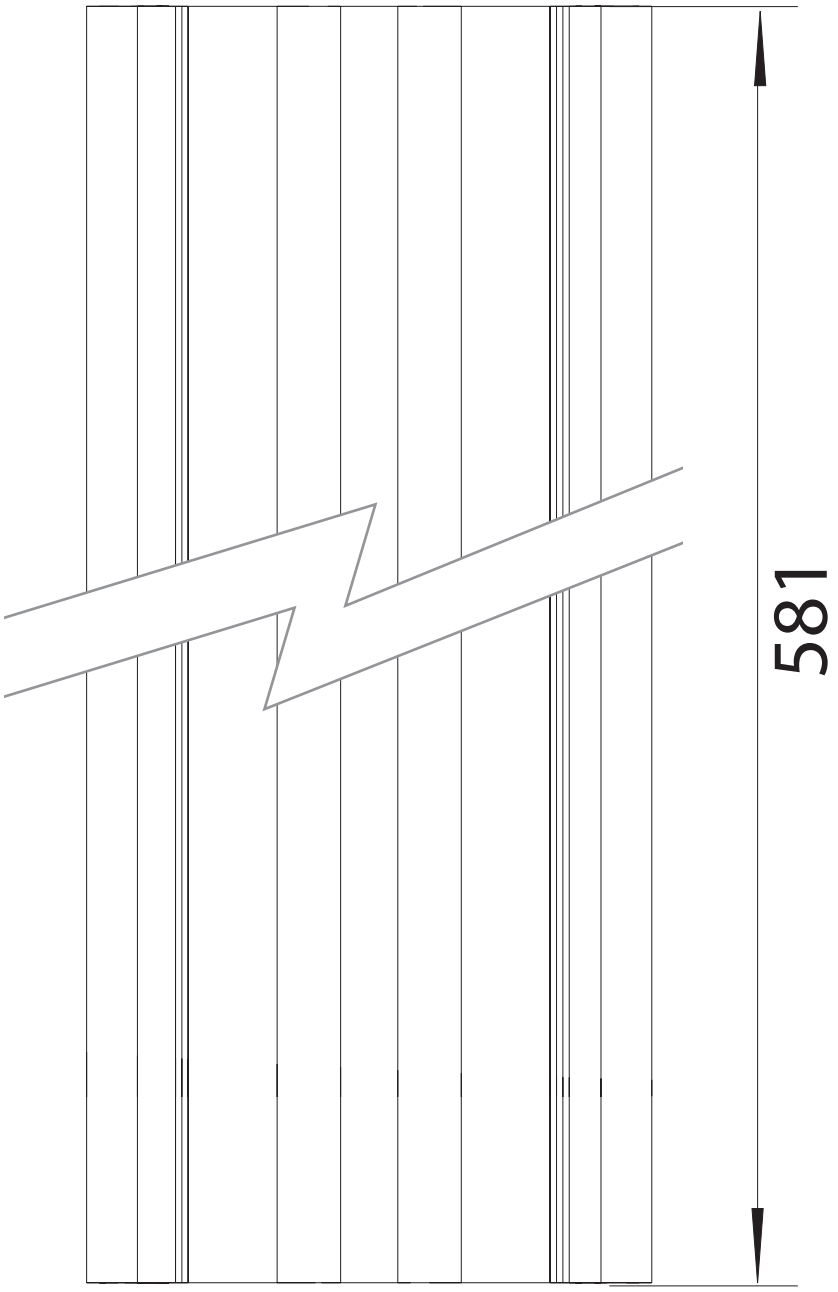
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.785

PACKAGING WEIGHT UNIT
KGM


76
72
110


581