


Dual USB Charger A+C 30W Power Delivery gold Simon 270

REF. 20000296-095

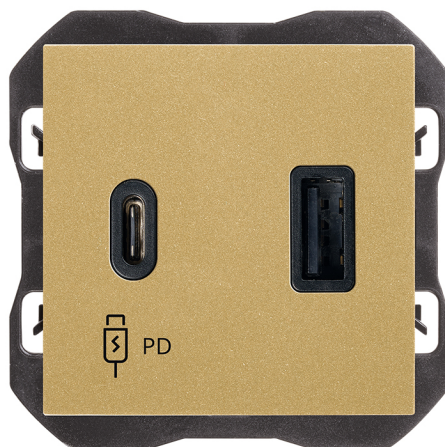

BASIC INFORMATION

FINISH

Matt gold

SYMBOL

PD

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 270 frames

PACKAGING CONTENTS

Mechanism, cover and
instruction sheet

ETIM CLASS

EC002949

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

POWER SUPPLY (V~)

127/230 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RAL

1036

NUMBER OF POSSIBLE ELEMENTS

1 element

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

FORMAT

USB

TYPE OF MECHANISM

Insertion

USB PORT TYPE

A,C

FREQUENCY

50 - 60 Hz

MONOBLOCK

No

VOLTAGE (V~)

127/230 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

CLAW

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | Dir. 2011/65/UE RoHS + post. mod | EN 50563:2011 + A1:2013 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN IEC 62368-1:2020 + A11:2020 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 63000:2018 | EN IEC 61000-6-1:2019 | EN IEC 61000-6-3:2021

LOGISTICS INFORMATION

UNITARY EAN CODE	UNITARY PACKAGING WEIGHT UNIT	PACKAGING MEASUREMENT UNIT
8421053277379	KGM	MMT
UNITARY PACKAGING HEIGHT	PACKAGING EAN	PACKAGING VOLUME
0	8421053277379	242000
UNITARY PACKAGING WIDTH	UNITS CONTAINED PACKAGING	PACKAGING VOLUME UNIT
0	1	MMQ
UNITARY PACKAGING LENGTH	PACKAGING HEIGHT	PACKAGING GROSS WEIGHT
0	80	0
UNITARY PACKAGING VOLUME	PACKAGING WIDTH	PACKAGING NET WEIGHT
0	55	0.062
UNITARY PACKAGING GROSS WEIGHT	PACKAGING LENGTH	PACKAGING WEIGHT UNIT
0.062	55	KGM
PRODUCT NET WEIGHT		
0.062		

