

2-wire phase-cut dimmer switch 230 V~ aluminium Simon 270

REF. 20000313-093



BASIC INFORMATION

FINISH

Matt aluminium

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000025

MATERIAL

Thermoplastic

PACKAGING CONTENTS

Dimmer switch and instruction sheet

REMARKS

It has a potentiometer for adjusting the minimum dimming level for the lamps.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

LATCH TYPE

Electric

POWER SUPPLY (V~)

230 V~

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RAL

9006

FREQUENCY

50 - 60 Hz

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

INSTALLATION DIRECTION

Horizontal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053282922

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.1

PRODUCT NET WEIGHT

0.111

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053282922

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

80

PACKAGING WIDTH

55

PACKAGING LENGTH

55

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

242000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0

PACKAGING NET WEIGHT

0.111

PACKAGING WEIGHT UNIT

KGM

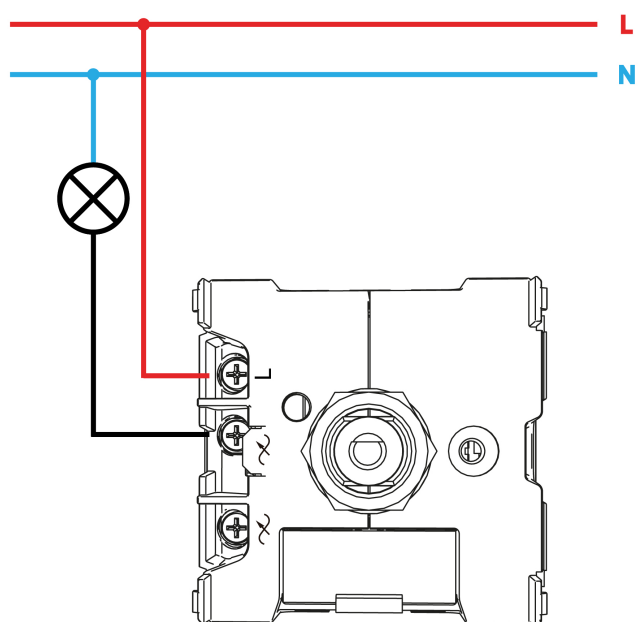

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet