2-way switch 10AX 250V~ with built-in pilot light and fast terminal connection system white Simon 27 Play

REF. **27202-65**



BASIC INFORMATION

DESCRIPTION

With the 2-way switch with built in light of the Simon 27 Play collection, you will enjoy maximum functionality linked to a minimalist design of sober lines, in a high colour white. This 2-way switch tilting, is made up of 2 modules with cable section cross-section of 1.5 to 2.5 mm and incorporates signaling function, all system, in a compact format of a size of 45 x 45 mm Manufactured with metal materials isolated with thermoplastic and a thermoset trim, guarantees the protection of your stay in case of fire, avoiding the flame spread and toxicity by smoke. It can reach reach maximum temperatures of -25 to 50 ºC. Designed for installation both recessed and surface-mounted, it is compatible with a voltage of power of 250 Volts, with maximum load of 10 AX and a signal consumption of 0.55 milliampere system (mA). The versatility of its design allows you to combine it with the most common frames and mechanisms of the Simon 27 range.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Can be combined with article 2700802-037 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)

0.55 mA

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

Yes

CURRENT (A)

10 AX

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Pivoting

NOMINAL VOLTAGE (V~)

250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
1229865

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.036

PRODUCT NET WEIGHT
0.036

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053035979

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
53

PACKAGING WIDTH
105

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1229865

PACKAGING VOLUME UNIT
MMQ


PACKAGING GROSS WEIGHT
0.355

PACKAGING NET WEIGHT
0.36


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

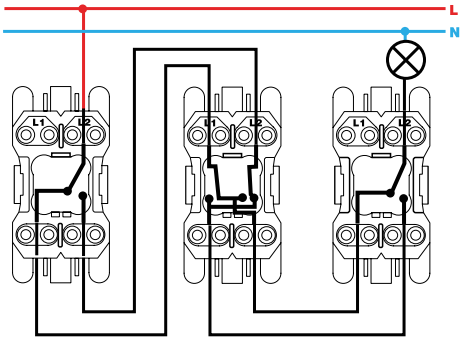


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

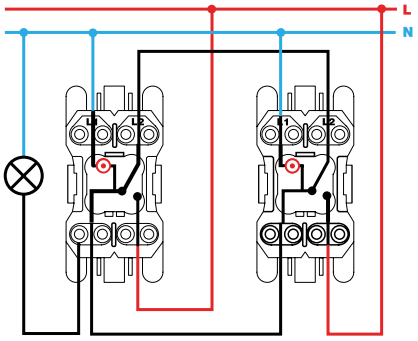


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

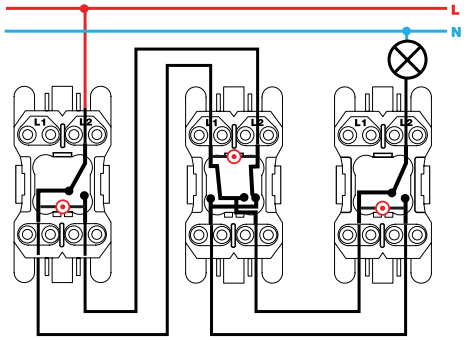

Conmutador cruce / Intermediate switch
XX2700254-XX