
Voice and data flat plate with dust cover for 1 element and 1 RJ45 connector category 5e UTP aluminium Simon K45

REF. **KA95U/8**

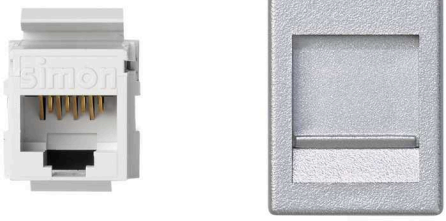

BASIC INFORMATION

DESCRIPTION

Flat base plate of voice and data with dust cover with 1 element and 1 RJ45 connector of category 5e UTP in aluminium colour, the article measures 45x45 mm and has a depth of 30 mm is suitable for surface and flush mounting and contains metal parts with halogen-free thermoplastic material and self-extinguishing halogen-free. It is, therefore, a material 100% safe and guarantees the no-propagation of the flame in case of fire. The product is in compliance with the regulation and corresponds to the series Simon K45. This collection offers a wide variety of panels and connectors designed to facilitate the workplace solutions in all spaces. This voice and data plate can be combined in vertical enclosures and mini columns, columns, Teleblock. To do this, it would be necessary to use the 90º positioner (reference K66) to guide the plate vertically. In terms of maintenance, use a soft, dry cloth.

FINISH

Aluminium

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-033)

PACKAGING CONTENTS

Voice and data flat plate with dust cover and RJ45 category 5e UTP connector

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-26 AWG wiring

RJ45 CONNECTION
With insertion tool

CONNECTOR CHARACTERISTICS
Category 5e UTP

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+60º C

DUST PROTECTION
Yes

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60º C

NUMBER OF MODULES
Four

PLATE TYPE
Flat

RJ45 ADAPTOR MODULE
Supplied with the voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
91140

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.017

PRODUCT NET WEIGHT
0.017

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436046115

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
70

PACKAGING WIDTH
93

PACKAGING LENGTH
140

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
911400

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.175

PACKAGING NET WEIGHT
0.17

PACKAGING WEIGHT UNIT
KGM