


## Simon iO master keypad 2 functions for creating experiences copper Simon 270

REF. 21021035-091

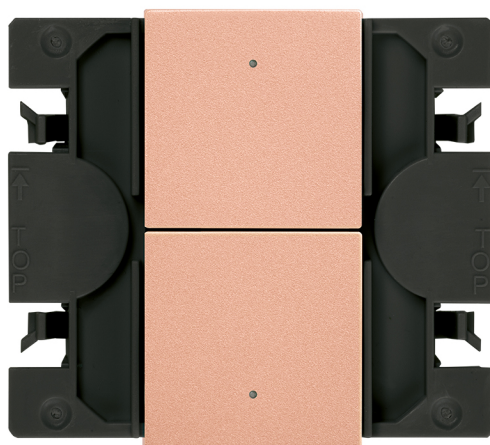

### BASIC INFORMATION

#### FINISH

Copper

#### TYPE OF ROCKER

Slender

#### MATERIAL

Thermoplastic

#### COMPATIBILITY

Simon 270 frames

#### PACKAGING CONTENTS

Mechanism, rockers and instruction sheet

#### ETIM CLASS

EC004265

## TECHNICAL INFORMATION

|                                                   |                                                                                                                     |                                               |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| AVAILABLE MARKET<br>CE                            | IP RATING<br>IP20                                                                                                   | POWER SUPPLY (V~)<br>127/230 V~               |
| CABLE SECTION ADMITTED (MM)<br>From 1,5 to 2,5 mm | MAINTENANCE<br>Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine. | RAL<br>1035                                   |
| NUMBER OF POSSIBLE ELEMENTS<br>1 element          | TYPE OF MECHANISM<br>Push                                                                                           | STORAGE TEMPERATURE RANGE (°C)<br>-25 - 75 °C |
| FREQUENCY<br>50 - 60 Hz                           | OPERATING TEMPERATURE RANGE (°C)<br>5 - 45 °C                                                                       | VOLTAGE (V~)<br>127/230 V~                    |
| INDICATOR FUNCTION<br>Yes                         |                                                                                                                     |                                               |

## INSTALLATION AND MAINTENANCE

|                                     |                                                      |                                                   |
|-------------------------------------|------------------------------------------------------|---------------------------------------------------|
| CABLE STRIPPING NECESSARY (MM)<br>7 | INSTALLABLE IN FLUSH MOUNT JUNCTION BOX<br>Universal | INSTALLATION TYPE<br>Suitable for flush mounting  |
|                                     | INSTALLATION DIRECTION<br>Horizontal, Vertical       | TYPE OF TERMINAL CONNECTION - FUNCTION 1<br>Screw |

## REGULATIONS

### REGULATIONS

Dir. 2011/65/UE RoHS + post. mod. | Dir. 2014/53/UE RED | EN 50428:2005 | EN 50428:2005 A1:2007 | EN 50428:2005 A2:2009 | EN IEC 63000:2018 | ETSI EN 300328 V2.2.2

## LOGISTICS INFORMATION

UNITARY EAN CODE

8421053282267

UNITARY PACKAGING WEIGHT  
UNIT

KGM

PACKAGING MEASUREMENT  
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053282267

PACKAGING VOLUME

242000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.077

UNITARY PACKAGING GROSS  
WEIGHT

0.077

PACKAGING LENGTH

55

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.077



Para información más detallada consultar la hoja de instrucciones  
For more detailed information check the instruction sheet