


Blinds switch 230V~ with 3 positions: up, down and stop aluminium Simon 270

REF. 20000333-093

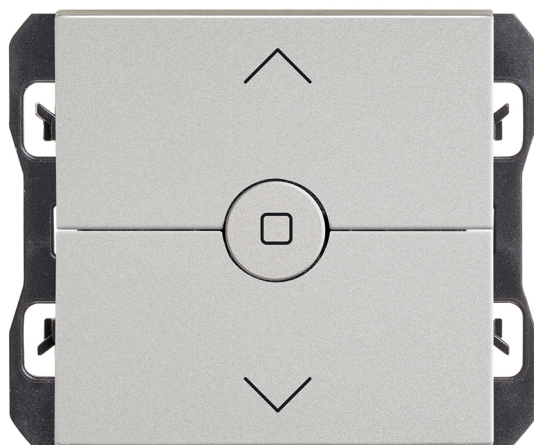

BASIC INFORMATION

FINISH

Matt aluminium

MATERIAL

Thermoplastic

PACKAGING CONTENTS

3-position Blinds Switch

SYMBOL

Arrow

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000044

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

POWER SUPPLY (V~)

230 V~

NUMBER OF POSSIBLE ELEMENTS

1 element

LATCH TYPE

Electric

RAL

9006

FREQUENCY

50 - 60 Hz

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-20 - 85 °C

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

15

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053283158

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.04

PRODUCT NET WEIGHT

0.04

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053283264

UNITS CONTAINED PACKAGING

5

PACKAGING HEIGHT

47.75

PACKAGING WIDTH

57

PACKAGING LENGTH

261

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

710376.75

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.04

PACKAGING NET WEIGHT

0.2

PACKAGING WEIGHT UNIT

KGM

