Socket 16A 250V ~ with connection system 1click® Simon 100

REF. **10000458-039**



BASIC INFORMATION

COMPATIBILITY

Frames Simon 100

ETIM CLASS

EC000125

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

FORMAT
French

INDICATOR FUNCTION
No

CURRENT (A)
16 A

IP RATING
IP20

TYPE OF MECHANISM
Insertion

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
0 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 75 °C

VERSION
Unique

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
13

CLAW

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
universal

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
1 click connection (1 click®)

REGULATIONS

REGULATIONS
EN 50581:2012 + IEC 60884-1 Ed 3.2

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.045

PRODUCT NET WEIGHT
0.046

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053142097

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
65

PACKAGING WIDTH
125

PACKAGING LENGTH
195

PACKAGING MEASUREMENT UNIT
MMT

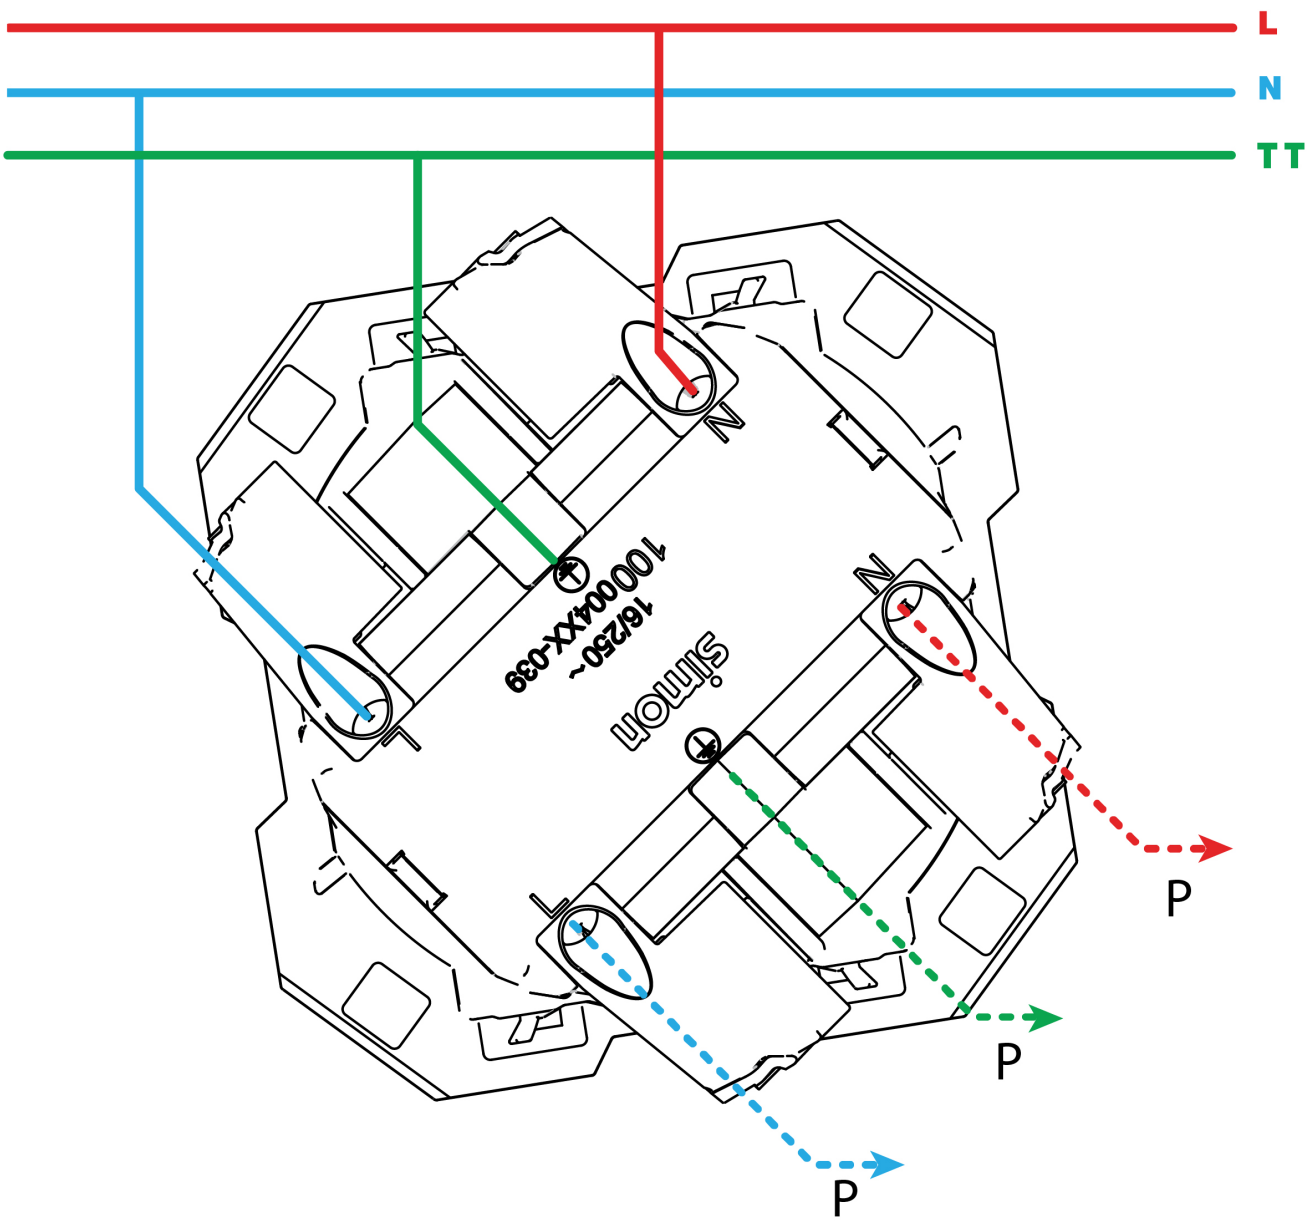
PACKAGING VOLUME
1584375

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.46

PACKAGING WEIGHT UNIT
KGM


L
N
TT
N
N
simon
16/250~
100004XX-039
P
P
P