


## 2-way intermediate switch 10AX 230V~ with built-in light and fast terminal connection system matt black Simon 270

REF. 20000254-098

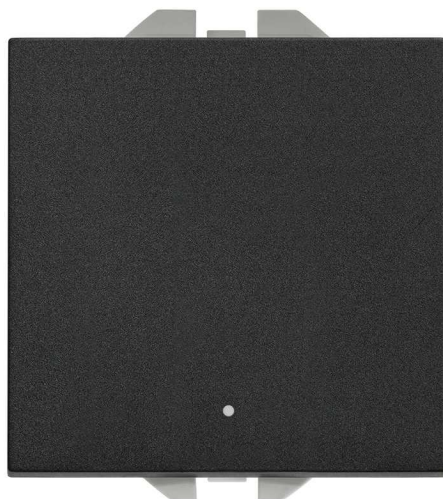

### BASIC INFORMATION

#### FINISH

Matt black

#### TYPE OF ROCKER

Large

#### MATERIAL

Thermoplastic

#### COMPATIBILITY

Simon 270 frames

#### PACKAGING CONTENTS

Mechanism, cover and instruction sheet

#### ETIM CLASS

EC001590

## TECHNICAL INFORMATION

|                                                   |                                                                                                                     |                                               |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| AVAILABLE MARKET<br>CE                            | FREQUENCY<br>50 - 60 Hz                                                                                             | NOMINAL VOLTAGE (V~)<br>230 V~                |
| CABLE SECTION ADMITTED (MM)<br>From 1,5 to 2,5 mm | INDICATOR FUNCTION<br>Yes                                                                                           | OPERATING TEMPERATURE RANGE (°C)<br>5 - 45 °C |
| CONSUMPTION INDICATOR (MA)<br>1 mA                | CURRENT (A)<br>10 AX                                                                                                | POWER SUPPLY (V~)<br>230 V~                   |
| TYPE OF COVER<br>Large                            | IP RATING<br>IP20                                                                                                   | RAL<br>9005                                   |
| NUMBER OF POSSIBLE ELEMENTS<br>1 element          | MAINTENANCE<br>Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine. | STORAGE TEMPERATURE RANGE (°C)<br>-25 - 75 °C |
| FORMAT<br>Fast                                    | TYPE OF MECHANISM<br>Pivoting                                                                                       | VOLTAGE (V~)<br>127/230 V~                    |

## INSTALLATION AND MAINTENANCE

|                                      |                                                      |                                                  |
|--------------------------------------|------------------------------------------------------|--------------------------------------------------|
| CABLE STRIPPING NECESSARY (MM)<br>15 | INSTALLABLE IN FLUSH MOUNT JUNCTION BOX<br>Universal | INSTALLATION TYPE<br>Suitable for flush mounting |
|                                      | INSTALLATION DIRECTION<br>Horizontal, Vertical       | TYPE OF TERMINAL CONNECTION - FUNCTION 1<br>Fast |

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2013

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053268469

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING VOLUME

0

### UNITARY PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING GROSS WEIGHT

0.29

### PRODUCT NET WEIGHT

0.29

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053268476

### UNITS CONTAINED PACKAGING

5

### PACKAGING HEIGHT

47.5

### PACKAGING WIDTH

57

### PACKAGING LENGTH

262

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

713098.5

### PACKAGING VOLUME UNIT

MMQ

### PACKAGING GROSS WEIGHT

0

### PACKAGING NET WEIGHT

1.45

### PACKAGING WEIGHT UNIT

GRM

