


Flat voice and data plate with dust cover for 1 element with 1 RJ45 category 6 FTP white Simon 500 Cima

REF. 50003185-030

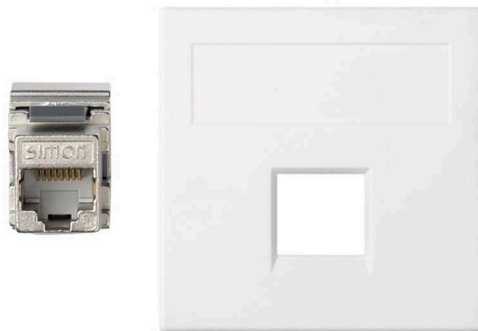

BASIC INFORMATION

DESCRIPTION

The Simon 500 Cima series lands with the aim of improve the workplace solutions in the different spaces. One sample of this is this plate of voice and data flat plate with 1 element for 1 RJ45 category 6 FTP. The mechanism is finished in white and does not include dust shutter. In several to their physical features, the piece measures 50x50x45,4 mm and is in compliance with the regulations, it also has clips designed for optimum fastening in vertical and horizontal enclosures without that is essential adapter. The plate is made of metal elements with halogen-free thermoplastic of character self-extinguishing and halogen-free. This material that provides maximum security in case of fire, as this helps to prevent the propagation of the fire. It is very important to give you a proper maintenance to the article to prolong its service life., use a soft, dry cloth.

FINISH

White

PACKAGING CONTENTS

Flat voice and data plate without dust cover, RJ45 category 6 FTP connector and installation manual

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST PROTECTION

No

NUMBER OF MODULES

1

CABLE SECTION ADMITTED (MM)

22-26 AWG wiring

DUST SHUTTER

No

PLATE TYPE

Flat

AVAILABLE IN

Plate for 1 and 2 RJ45

FORMAT

RJ45

RAL

9003

RJ45 CONNECTION

Without insertion tool

IP RATING

IP20

RJ45 ADAPTOR MODULE

Included in voice and data plate

CONNECTOR CHARACTERISTICS

category 6 FTP

KIT AVAILABILITY

No

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

NUMBER OF CONNECTORS

1

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

RJ45 CONNECTORS

Included in voice and data plate

VERSION

Single

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

220

UNITARY PACKAGING GROSS WEIGHT

0.069

PACKAGING LENGTH

223

UNITARY PACKAGING WIDTH

400

PRODUCT NET WEIGHT

0.069

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING LENGTH

430

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

0.052

UNITARY PACKAGING MEASUREMENT UNIT

MMT

PACKAGING EAN

8421053098134

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

37840000

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

82

PACKAGING NET WEIGHT

1.38

PACKAGING WIDTH

165

PACKAGING WEIGHT UNIT

KGM

