# Aluminium mini column with 1 side for 4 elements white Simon 500 Cima

REF. **52550112-030**



# BASIC INFORMATION

## DESCRIPTION

The of 1 side of aluminium mini column for 4 elements is available in a simple but stylish white finish and is part of the collection Simon 500 Cima. It is manufactured in aluminium and allows, thanks to the shape of the baseboard, the integration of the mini-column in any type of floor, be it a raised or concrete floor, and that is that our piece of 304x110x72 mm possible to offer the best functionality to prices unstoppable. From Simon we recommend to our customers to choose the rockers and covers in the same finish as this piece to ensure a perfect harmony. If you are looking for the most advanced solutions for your home, confident in our collection Simon 500 Cima, because it offers products with the maximum security thanks to our commitment by the quality. Trust/Confident in the experience of our brand and neglect of the other.

## FINISH

White

## MATERIAL

Aluminium

## COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

## PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

## ETIM CLASS

EC001941

## REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

### PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

### AVAILABLE IN
1 and 2 sides

### MAX TEMP DURING CONSTRUCTION WORK (°C)
+120 °C

### EARTHING RESISTANCE
< 0.05 Ohms

### ELECTRICAL PROPERTIES
With electrical continuity

### ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

### IP RATING
IP4X

### KIT AVAILABILITY
No

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to +120 °C

### NUMBER OF MODULES
4

### RAL
9003

### VERSION
1 side

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS
Only with tool

### TYPE OF FASTENING
Using the screws supplied

### INSTALLATION DIRECTION
Vertical

### INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

### SCREWS REQUIRED FOR FLOOR FIXING
4

### REMOVAL OF TRIM FRAMES
Only with tool

## REGULATIONS

### REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

## LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094341

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.235

PRODUCT NET WEIGHT
1.235

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094341

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
85

PACKAGING WIDTH
128

PACKAGING LENGTH
867

PACKAGING MEASUREMENT UNIT
MMT

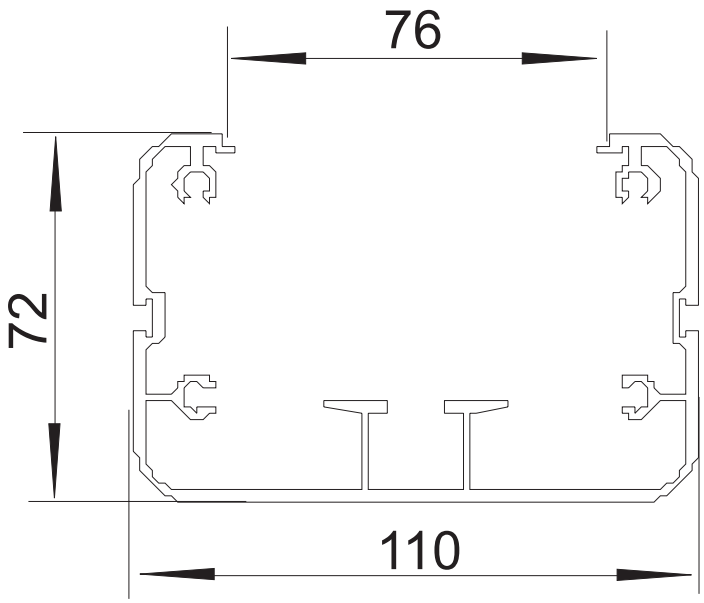
PACKAGING VOLUME
15847200

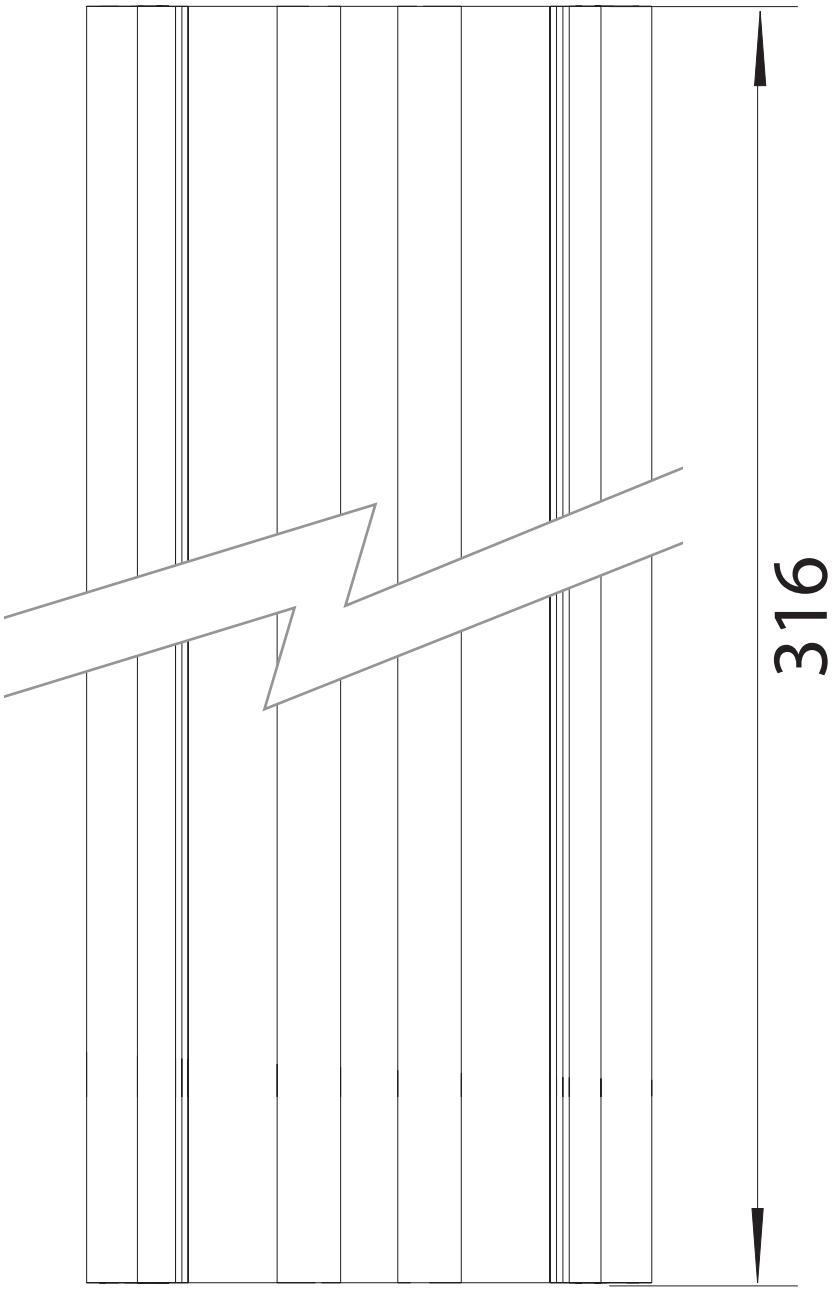
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.235

PACKAGING WEIGHT UNIT
KGM


76
72
110


316