


Flat voice and data plate with dust cover for 1 element with 2 RJ45 category 6 FTP white Simon 500 Cima

REF. 50003189-030

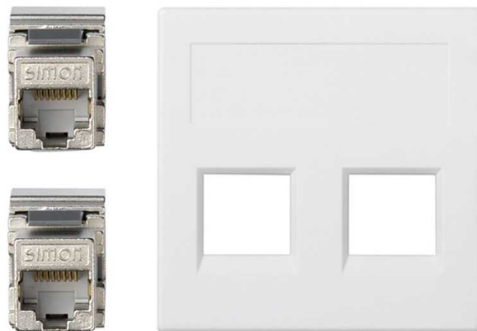

BASIC INFORMATION

DESCRIPTION

This is a flat base plate of voice and data for 1 element with 2 RJ45 category 6 FTP. The product is finished in white and is included in the Simon 500 Cima series. It measures 50x50x45,4 mm and is made of metal parts with halogen-free halogen-free thermoplastic material. Also, this material is self-extinguishing and guarantees the no-propagation of the flame of a fire. The plate is with clips for its correct installation in vertical and horizontal enclosures and does not require adapter. Does not include dust shutter. When it comes to maintenance, the manufacturer recommends cleaning this type of articles with a soft and dry cloth. The Simon 500 Cima series represents a clear commitment workplace solutions in work places. Its mechanisms allow installation much more agile thanks to the innovative click terminal connection system.

FINISH

White

PACKAGING CONTENTS

Flat voice and data plate without dust cover, 2 RJ45 category 6 FTP and installation manual

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	DUST PROTECTION No	NUMBER OF MODULES 1
CABLE SECTION ADMITTED (MM) 22-26 AWG wiring	DUST SHUTTER No	PLATE TYPE Flat
AVAILABLE IN Plate for 1 and 2 RJ45	FORMAT RJ45	RAL 9003
RJ45 CONNECTION Without insertion tool	IP RATING IP20	RJ45 ADAPTOR MODULE Included in voice and data plate
CONNECTOR CHARACTERISTICS category 6 FTP	KIT AVAILABILITY No	SNAP-FIT RJ45 PLATES Keystone I, II, ATT®/Avaya®
NUMBER OF CONNECTORS 2	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	SNAP-FIT TYPE Keystone I, II, ATT®/Avaya®
RJ45 CONNECTORS Included in voice and data plate	TEMPERATURE RANGE DURING INSTALLATION (°C) -5 to 60 °C	VERSION Single
MAX TEMP DURING CONSTRUCTION WORK (°C) +60 °C		

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR	INSTALLATION DIRECTION Vertical, corresponding with the direction of the mechanisms	INSTALLATION TYPE Fixing by direct snap-fit, no tools needed.
INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Specific Simon 500 Cima		REMOVAL OF THE PLATE Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

57

UNITARY PACKAGING GROSS WEIGHT

0.045

PACKAGING LENGTH

86

UNITARY PACKAGING WIDTH

76

PRODUCT NET WEIGHT

0.045

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING LENGTH

76

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

0.052

UNITARY PACKAGING MEASUREMENT UNIT

MMT

PACKAGING EAN

8421053098097

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

329232

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

26

PACKAGING NET WEIGHT

0.9

PACKAGING WIDTH

58

PACKAGING WEIGHT UNIT

KGM

