
Framework for 6 elements in adjustable floor box white Simon 500 Cima

REF. **52051804-030**

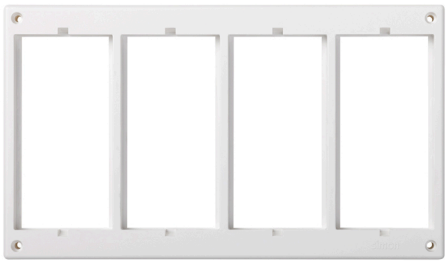

BASIC INFORMATION

DESCRIPTION

Floor box for model 52051804-030 Professional all the components of the Simon 500 Cima range specially designed For flush mounted in concrete floor and raised floor, adapting of natural way to All kinds of environments. Model adjustable floor box, Includes mechanism-holders for 6 elements, both in raised floor or in Concrete. This manufactured in plastic material with finishes in tonality and White colour. Integrated components of character halogen-free thermoplastic That guarantees no flame propagation in case of fire and the low Toxicity in case of smoke. It measures 132 X 228 x 16 mm, makes it possible to a great adaptation to the creation of Elements active for installations in different environments professionals, allowing A optimized for installation in concrete floor or raised floor.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using a specific adaptor)

PACKAGING CONTENTS

Framework

ETIM CLASS

EC000007

REMARKS

The adjustable floor boxes include the framework. You only need to order it as a spare part in the event of breakage or loss.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

2, 4, 6 and 8 elements

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

KIT AVAILABILITY

Yes

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

8 modules

RAL

9003

VERSION

8 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using screws

INSTALLATION DIRECTION
Horizontal, Vertical

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

REMOVAL OF THE FRAME
Only with tool

INSTALLATION TYPE
In concrete floor and raised floor through the adjustable floor boxes

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254851

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.089

PRODUCT NET WEIGHT
0.089

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093337

UNITS CONTAINED PACKAGING
5

PACKAGING HEIGHT
95

PACKAGING WIDTH
135

PACKAGING LENGTH
230

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
2949750

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.445

PACKAGING WEIGHT UNIT
KGM

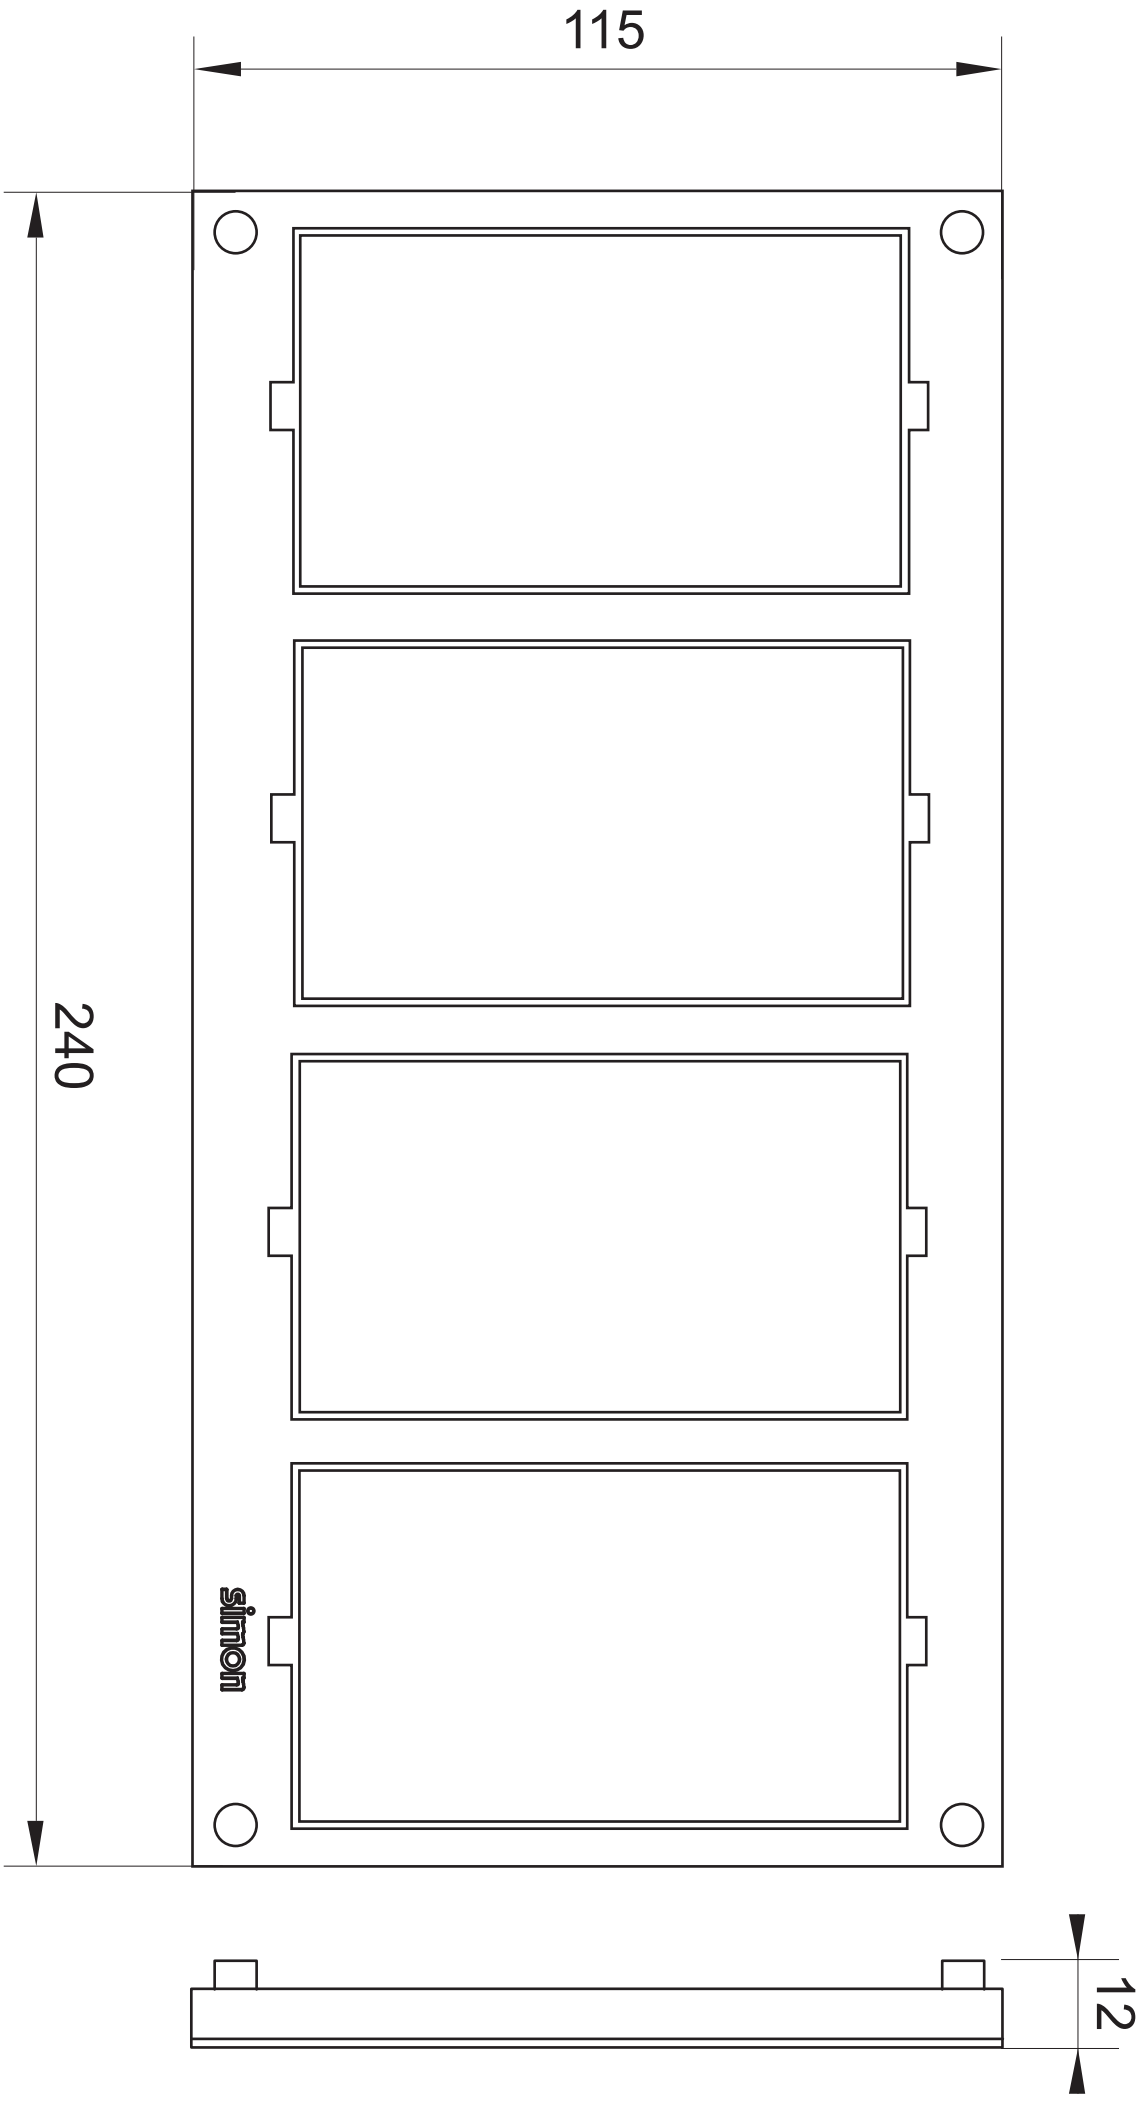
115
240
simon
12