# ARCH S Downlight Round 4000 K Spot 1-10 V White

REF. **91531001-400**



## BASIC INFORMATION

**BODY MATERIAL**
Die-cast aluminium

**PACKAGING CONTENTS**
1 Unit

**APPLICATION**
Domestic,Office,Retail,Hotel,Contract

**PACKAGING DIMENSIONS (MM)**
116x224x171 mm

# TECHNICAL INFORMATION

**FREQUENCY**
50 - 60 Hz

**IP RATING**
IP43

**OPERATING TEMPERATURE RANGE (°C)**
0 - 35 °C

**POWER SUPPLY (V~)**
110/240 V~

**RAL**
9016

**COLOR TEMPERATURE (K)**
4000 K

**CONTROL**
1-10 V,Push Dim

**CRI**
80

**DIRECTIONAL**
Yes

**DRIVER INCLUDED**
Yes

**ELECTRICAL CLASS**
II

**ENERGY EFFICIENCY**
A+

**L70 (°C)**
100000h at 25°C

**L90 (°C)**
30000h at 25°C

**COLOR TYPE**
CW

**LIGHTING EFFICIENCY (LM/W)**
111 lm/W

**LUMENS (LM)**
1000 lm

**NUMBER OF LUMINAIRES**
1

**MACADAM STEPS**
<3 Step MacAdam


**OPTICS**
Spot 20°

**PHOTOBIOLOGICAL CLASSIFICATION**
Class II

**POWER FACTOR (Φ)**
> 0,9

**POWER (W)**
9 W

## PHOTOMETRY ASSETS – POLAR

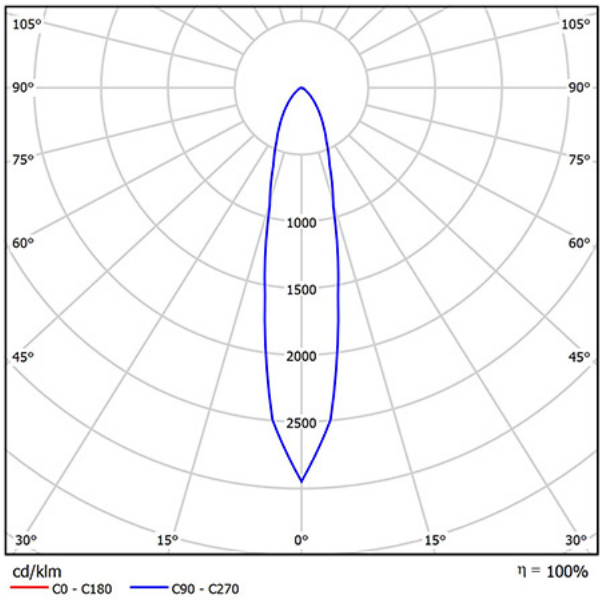

## INSTALLATION AND MAINTENANCE

**INSTALLATION ALTERNATIVES**
Flush-mounted, Trimless

**INSTALLATION TYPE**
Surface-mounted

## REGULATIONS

**EAC MARKED**
Yes

**ECORRAE MARKED**
Yes

**WARRANTY**
5 years

## LOGISTICS INFORMATION

**UNITARY PACKAGING HEIGHT**
0

**UNITARY PACKAGING WIDTH**
0

**UNITARY PACKAGING LENGTH**
0

**UNITARY PACKAGING VOLUME**
0

**UNITARY PACKAGING GROSS WEIGHT**
0

**PRODUCT NET WEIGHT**
1.09

**UNITARY PACKAGING WEIGHT UNIT**
KGM

**PACKAGING EAN**
8436547037964

**UNITS CONTAINED PACKAGING**
1

**PACKAGING HEIGHT**
116

**PACKAGING WIDTH**
171

**PACKAGING LENGTH**
224

**PACKAGING MEASUREMENT UNIT**
MMT

**PACKAGING VOLUME**
4567500

**PACKAGING VOLUME UNIT**
MMQ

**PACKAGING GROSS WEIGHT**
1.2

**PACKAGING NET WEIGHT**
1.09

**PACKAGING WEIGHT UNIT**
KGM