


Push button 16A 250V~ with quick terminal connection system Simon K45

REF. K303

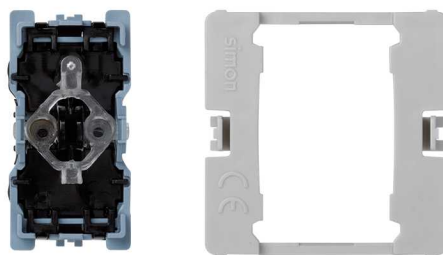

BASIC INFORMATION

DESCRIPTION

Push-button switch half element and 1 module (6 Amps and 250 Volts) with quick terminal connection of the series Simon K45. It is the reference code K303. This series, K45, it incorporates different products designed to the workplace solutions in work stations, such as Ofiblocks, Teleblocks, columns and mini-towers anti-vandal, etc. It is not possible to combine, in this case, 2 control mechanisms with rocker close in a adaptor plate from the Simon 500 Cima series to the Simon K45. It does not have a signaling function, its dimensions are 22 x 45 mm and the stripping of 11 millimetres being the wire section admitted wire up to 1.5 millimetres. This product, like all Simon, is manufactured in the best materials (metal components with thermoplastic insulation) and each and every one of the products pass an exhaustive quality control, something that is essential for the brand.

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-03X)

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC000029

REMARKS

It is not possible to combine 2 narrow button control mechanisms on a Simon 500 Cima-Simon K45 adapter plate

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

16 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

Up to 1,5 mm

IP RATING

IP21

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

Half element

TYPE OF MECHANISM

Tilting

VERSION

Single

INDICATOR FUNCTION

No

NOMINAL VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION DIRECTION

Vertical according to the
direction of the mechanisms

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Fast

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45
and specific Simon 500 Cima
through adaptor (ref.50012088-
03X)

INSTALLATION TYPE

Suitable for surface and flush
mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.026

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING VOLUME

103823

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436046986

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

1212505

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.26

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING HEIGHT

47

PACKAGING NET WEIGHT

0.26

UNITARY PACKAGING GROSS
WEIGHT

0.026

PACKAGING WIDTH

47

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

47