


Flush-mount trim cover for adjustable floor box or service cover 6 elements graphite Simon 500 Cima

REF. 52053103-038

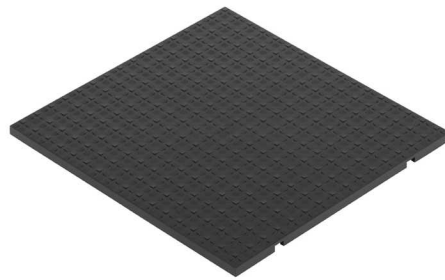

BASIC INFORMATION

DESCRIPTION

This floor box is included in the Simon 500 Cima range and is specially designed to be installed in a very simple way by recessing in concrete floors, although it is also suitable for raised floor. The box is capable of providing energy to a total of 6 elements of electrical up to 16 A and 250 volts. Consists of 6 modules and has dimensions of 226 x 187 millimetres and 76 millimetres of depth. It is available in an original graphite colour that adds a touch of modernity to the home, office or wherever it is placed. Once everything is configured, to complete the installation you will need a plastic tray with reference 52052103-035. Alternatively, you can also use a flush-mount trim cover Simon reference 52053103-038. The box is manufactured from metal components with self-extinguishing and halogen-free thermoplastic insulation.. It is material of first quality that responds to the latest in the market and that in addition to extend the service life of the product contributes to improving your safety, because they do not spread flames in case of fire and reduces the toxicity of smoke.

FINISH

Graphite

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IK CLASSIFICATION

08

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

2, 4, 6, 8 and 12 elements

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

NUMBER OF MODULES

6 modules

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

IP RATING

IP4X

RAL

7021

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

KIT AVAILABILITY

No

VERSION

6 elements

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Using the screws supplied

INSTALLATION TYPE

In raised or concrete floor with adjustable floor boxes or service covers

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

INSTALLATION DIRECTION

Horizontal, Vertical

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

PACKAGING EAN
8421053101537

PACKAGING VOLUME
3.217

UNITARY PACKAGING LENGTH
0

UNITS CONTAINED PACKAGING
10

PACKAGING VOLUME UNIT
DMQ

UNITARY PACKAGING VOLUME
0

PACKAGING HEIGHT
75

PACKAGING GROSS WEIGHT
0

UNITARY PACKAGING GROSS
WEIGHT
0.111

PACKAGING WIDTH
165

PACKAGING NET WEIGHT
1.11

PRODUCT NET WEIGHT
0.111

PACKAGING LENGTH
170

PACKAGING WEIGHT UNIT
KGM

