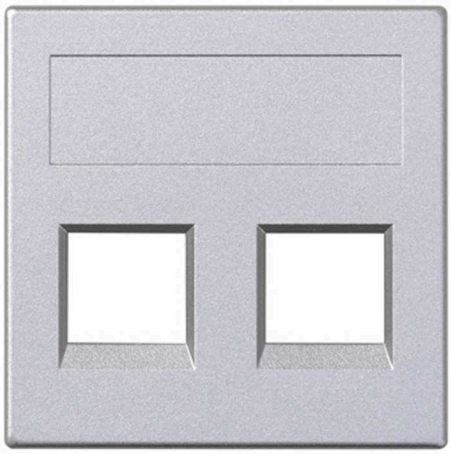
Flat voice and data plate without dust cover for 2 RJ45 Nexans® for 1 element aluminium Simon 500 Cima

REF. **50018189-033**



BASIC INFORMATION

DESCRIPTION

Our plate of voice and data plate without dust cover for 2 RJ45 Nexans ® of the Simon 500 Cima series has an care in aluminium finishes. It has measures of 50x50x11 and includes clips to be able to set it in vertical and horizontal enclosures without the need of adapters. But it is best to the fact that it is manufactured with thermoplastic components halogen-free to ensure that they are not propagate had fire propagating if, in addition to a very low toxicity in the event of smoke generation. Deserts Simon we concern for the security of our customers. For this purpose, we have just created the collection Simon 500 Cima, a collection that brings together the mechanisms the most advanced and safe so that you can fill your home of technological solutions which also have the quality and guarantee of our brand.

FINISH

Aluminium

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

COMPATIBLE WITH CONNECTORS
Nexans® LANmark®-5 EVO, LANmark®-6 EVO.

RJ45 CONNECTORS
Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST PROTECTION
No

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
1

PLATE TYPE
Flat

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
RJ45 Nexans® connectors

SNAP-FIT TYPE
RJ45 Nexans® connectors

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.028

PRODUCT NET WEIGHT
0.028

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053097106

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
54

PACKAGING WIDTH
52

PACKAGING LENGTH
215

PACKAGING MEASUREMENT UNIT
MMT

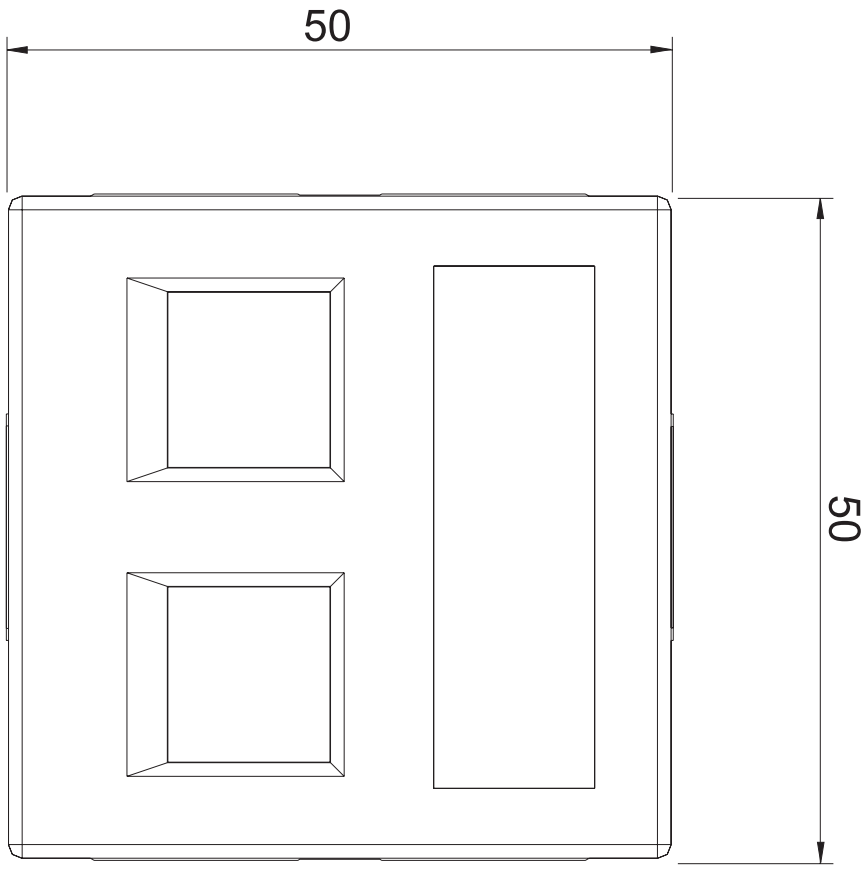
PACKAGING VOLUME
0.604

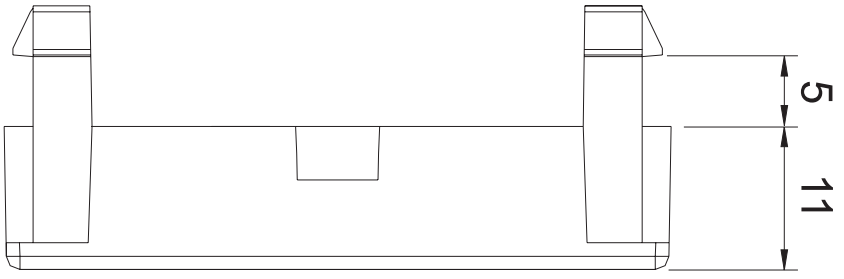
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.28

PACKAGING WEIGHT UNIT
KGM


50
50


5
11