Service cover for 6 elements for concrete or raised floor installation grey Simon 500 Cima

REF. **52054103-035**



BASIC INFORMATION

DESCRIPTION

Simon guarantees the most advanced technology in its products, excellent preparation for the future of its activity, in everything related to communications. This is, electricity, voice and data and multimedia. It also complies with the strictest regulations, it is fully compatible, not only with Simon products, but also with the universal boxes and connections. Although it is important to note, with Simon and its range CIMA 500, you can perform its assemblies 50% faster and be assured of the maximum safety for both people and installations. Even the controls are designed in such a way as to make your work easier and faster. Flush-mounted in concrete or raised floor.. This is a service cover for 6 elements for flush mounting in concrete or raised floor, grey finish. Range Simon 500 Cima. Once the product has been installed, you have the option to combine it with the flush-mount trim cover (ref.52053103-035). For inspection of 6 elements / 6 modules. It can be installed in concrete or raised floor. Complies with the strictest regulations in terms of resistance to high or low temperatures. (-5 to +60 ºC + 90 ºC. UNE-EN 60.670-23) self-extinguishing metal components with thermoplastic insulation and halogen-free; guarantees no flame propagation in case of fire and low toxicity in case of smoke fire-resistant plastic.

FINISH

Grey

PACKAGING CONTENTS

Service cover and installation manual

ETIM CLASS

EC001903

MATERIAL

Plastic

REMARKS

Once the product has been installed, you have the option to combine it with the flush-mount trim cover (ref.52053103-035) in cases where you do not install the same floor covering.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)
+90 °C

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
6 modules

RAL
7011

RECESS DIMENSION (MM)
170 x 210 mm

VERSION
6 elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 14 and 54 mm

NUMBER OF COVER OPENING POSITIONS
2

REMOVAL OF COVER
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using fastening claws on the concrete floor tray or the raised floor tile (provided in the service cover)

CAN BE INSTALLED IN TRAY
Plástica y metálica

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised floor and concrete floor

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053101629

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.005

PRODUCT NET WEIGHT
1.005

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101629

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
75

PACKAGING WIDTH
200

PACKAGING LENGTH
230

PACKAGING MEASUREMENT UNIT
MMT

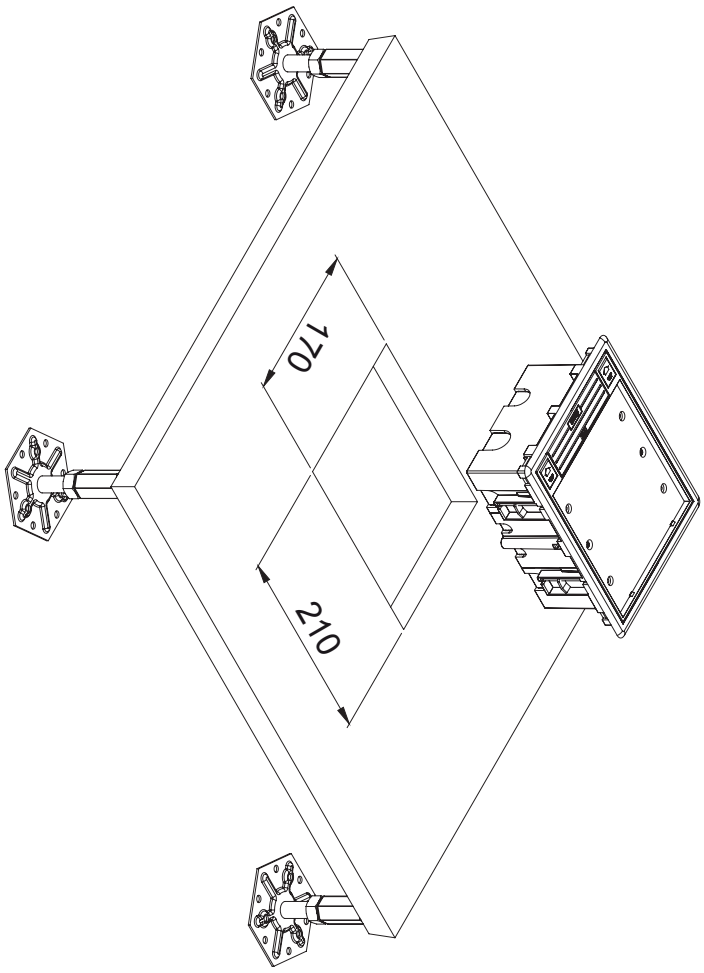
PACKAGING VOLUME
3.45

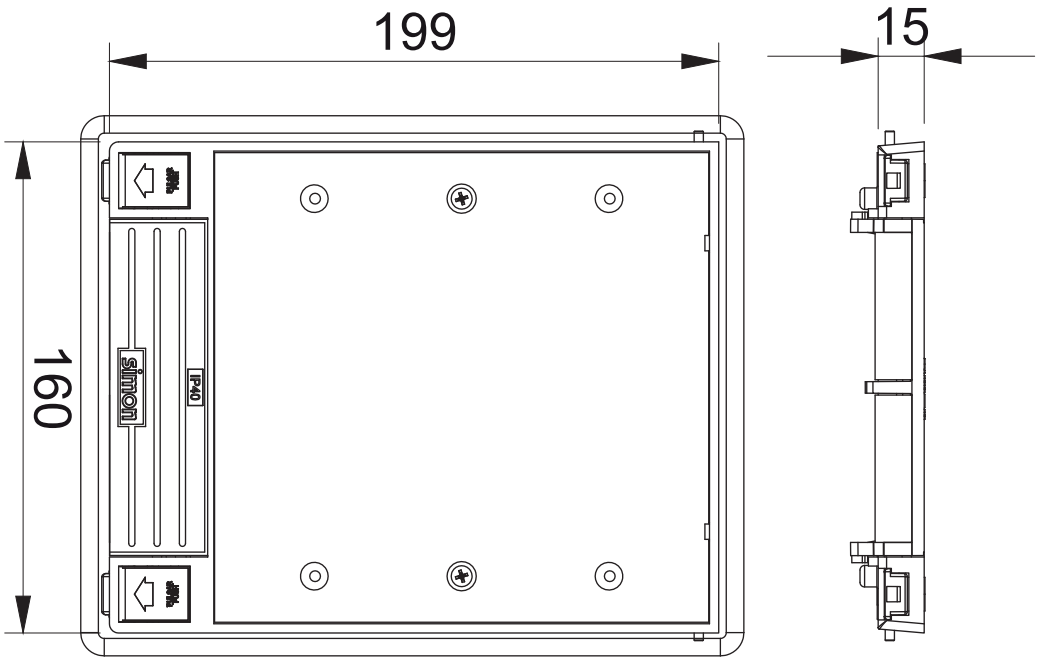
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.005

PACKAGING WEIGHT UNIT
KGM


170
210


199
15
160
simon
F40