


# Schuko socket base 16 A 250V~ with quick terminal connection system Simon 75

REF. 75464-39

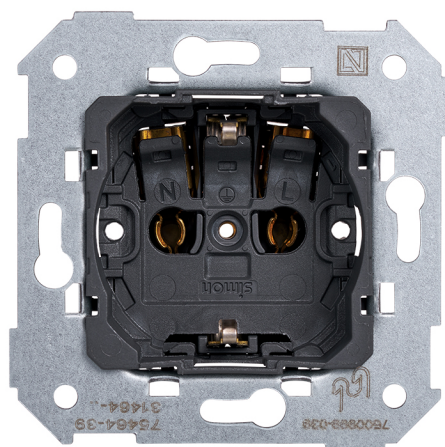

## BASIC INFORMATION

### DESCRIPTION

Schuko socket base 16 A 250 V~ Simon 75 with quick terminal connection system, designed to ensure a safe and efficient electrical connection in residential and professional installations. It supports a rated current of 16 amperes at 250 V~, offering reliable performance for power supply in all types of spaces. It incorporates an insertion connection system that facilitates a quick and safe installation, optimizing assembly times. The covers include integrated child protection to enhance safety in the home environment. Made with metallic components and halogen-free thermoplastic insulation, in accordance with IEC 60884-1 standards, it provides durability, resistance, and a high level of safety within the Simon 75 series and compatible frames.

### MATERIAL

Plastic, Metal

### COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

### PACKAGING CONTENTS

Socket outlet

### ETIM CLASS

EC000125

### REMARKS

The covers include the child protection feature.

## TECHNICAL INFORMATION

|                                          |                                |                                               |
|------------------------------------------|--------------------------------|-----------------------------------------------|
| AVAILABLE MARKET<br>CE                   | INDICATOR FUNCTION<br>No       | OPERATING TEMPERATURE RANGE (°C)<br>5 - 40 °C |
| CABLE SECTION ADMITTED (MM)<br>2,5 mm    | CURRENT (A)<br>16 A            | RECESS DIMENSION (MM)<br>40                   |
| CONNECTOR TYPE<br>Schuko                 | IP RATING<br>IP21              | STORAGE TEMPERATURE RANGE (°C)<br>-25 - 50 °C |
| NUMBER OF POSSIBLE ELEMENTS<br>1 element | LINKABLE<br>Yes                | VERSION<br>Single                             |
| FORMAT<br>Schuko                         | TYPE OF MECHANISM<br>Insertion | VOLTAGE (V~)<br>250 V~                        |
| FREQUENCY<br>50 Hz                       | MONOBLOCK<br>No                | NUMBER OF WIRES<br>6                          |
|                                          | NOMINAL VOLTAGE (V~)<br>250 V~ |                                               |

## INSTALLATION AND MAINTENANCE

|                                      |                                                      |                                                              |
|--------------------------------------|------------------------------------------------------|--------------------------------------------------------------|
| CABLE STRIPPING NECESSARY (MM)<br>14 | REMOVAL OF COVER<br>Only with tool                   | INSTALLATION TYPE<br>Suitable for surface and flush mounting |
| CLAW<br>Simon 75                     | INSTALLABLE IN FLUSH MOUNT JUNCTION BOX<br>Universal | TYPE OF TERMINAL CONNECTION - FUNCTION 1<br>Fast             |

## REGULATIONS

### REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012 + IEC 60884-1 Ed 3.2

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053256169

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING VOLUME

3026595

### UNITARY PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING GROSS WEIGHT

0.069

### PRODUCT NET WEIGHT

0.069

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053041710

### UNITS CONTAINED PACKAGING

10

### PACKAGING HEIGHT

83

### PACKAGING WIDTH

165

### PACKAGING LENGTH

221

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

3026595

### PACKAGING VOLUME UNIT

MMQ

### PACKAGING GROSS WEIGHT

0.691

### PACKAGING NET WEIGHT

0.69

### PACKAGING WEIGHT UNIT

KGM

