


## Kit Flash 90 consisting of schuko modular power socket, USB charger Type C 20W and RJ45 female-female data connector category 6 UTP white Simon K45

REF. KR3310023/9

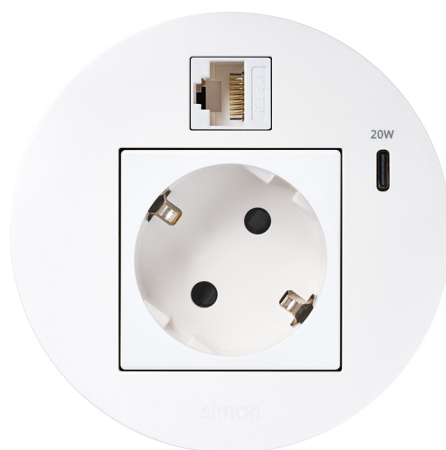

### BASIC INFORMATION

#### DESCRIPTION

Kit Flash 90 based on a modular schuko power socket-outlet for installation in furniture with an optional protective lid to allow it to be closed and conceal the connections when not in use. Includes a 20W USB Type-C charger and a Category 6 UTP RJ45 data connector in white finish. Supplied with a 20cm long patch cable terminated with a 3-pole Wieland® Gst18i male aerial quick connector with a safety anchor to facilitate safe connection and disconnection from the mains without interrupting the power supply. The kit is supplied assembled with the internal connections pre-made. All that is required is to cut the hole in the furniture where the product will be mounted. Once this is done, connect it to the mains power supply for operation.

#### FINISH

White

#### MATERIAL

Plastic

#### ETIM CLASS

EC002759

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### PROTECTION AGAINST DIRECT ACCESS OF CONTACTS

Yes

### PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS

Protective lid available (as an option) to protect the connections against entry of dust and small objects

### RJ45 CONNECTORS

Yes

### CONNECTOR TYPE

Schuko

### NUMBER OF CONTACTS

3

### DUST SHUTTER

No

### FORMAT

Schuko

### CURRENT (A)

16 A

### IP RATING

IP20

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### NOMINAL VOLTAGE (V~)

250 V~

### RAL

9003

### RECESS DIMENSION (MM)

ø80 mm

### RJ45 ADAPTOR MODULE

Yes

### SNAP-FIT RJ45 PLATES

Directly to the trim cover

### SNAP-FIT TYPE

Keystone

### USB CHARACTERISTICS

Charging

### USB CURRENT (A)

2,2 A

### POWER DELIVERY USB

Yes

### QUICK CHARGE USB

Yes

### USB VOLTAGE (V~)

9 V~

### VOLTAGE (V~)

250 V~

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS

No tools needed

### REMOVAL OF COVER

Only with tool

### EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

### TYPE OF TERMINAL

#### CONNECTION - FUNCTION 1

Quick connector

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD\*1 | Dir. 2014/30/UE EMC\*3 | Dir. 2011/65/UE RoHS + post. mod.\*1 | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) \*1 \*13 \*12 | S.I. 2016 No. 1101 - The Electrical Equipment (Safety) Regulations 2016\*2 | S.I. 2012 No. 3032 - The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012\*2 | IEC 60884-1 Ed.3.2\*1 | BS 1363-2:2016+A1:2018\*2 | UNE 20315-1-1:2017\*5 | BS 1363-4:2016+A1:2018\*2 | UNE 20315-1-2:2017\*5 | DS 60884-2-D1:2023\*4 | CEI 23-50 V4\*7 | SANS 164-1:2021\*6 | SN 441011-2-1:2019\*9 | SI 32 Fig. 204 B\*8 | AS/NZS 3112:2017\*11 | EN 50173-1:2018\*10 | EN 50563:2011 + A1:2013\*13 \*12 | EN 55032:2015 + A11:2020 + A1:2020\*12\*14 \*16 | EN 62368-1: 2014 + A11:2017\*13 \*12 | EN 55035:2017 + A11:2020\*12\*14 \*16 | ETSI-EN 301489-34 V2.1.1\*13 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024\*12 \*16 | EN IEC 60670-1:2021+ A11:2021\*15 | EN 61000-3-3:2013 +A1:2019 + A2:2021 \*12 \*16 | EN IEC 63000:2018

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053398111

### UNITARY PACKAGING GROSS WEIGHT

0.578

### PACKAGING LENGTH

252

### UNITARY PACKAGING HEIGHT

0

### PRODUCT NET WEIGHT

0.578

### PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING VOLUME

3931200

### UNITARY PACKAGING LENGTH

0

### PACKAGING EAN

8421053398111

### PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITS CONTAINED PACKAGING

1

### PACKAGING GROSS WEIGHT

0.738

### UNITARY PACKAGING VOLUME

0

### PACKAGING HEIGHT

120

### PACKAGING NET WEIGHT

0.578

### UNITARY PACKAGING VOLUME UNIT

MMQ

### PACKAGING WIDTH

130

### PACKAGING WEIGHT UNIT

KGM