Angled voice and data plate with dust cover for 1 element with 2 RJ45 category 6A FTP graphite Simon 500 Cima

REF. **50001086-038**



BASIC INFORMATION

DESCRIPTION

Simon, always at the forefront of the highest technologies, offers in its Cima 500 range, plates that support Category 6A, FTP. This is cables for the transmission of data and analogue and digital signals, special for home automation installations. The cables are an advanced technology for transmitting data at high speed. Provide excellent features that exceed the requirements of the Cat 6 general, giving a performance way superior to existing cables on the market for this category. Simon guarantees through these systems, higher connectivity than the existing, and are designed for the future, their expansion and modularity depending on each need. This is a an angled voice and data plate with dust cover with 1 element and 2 RJ45 category 6A FTP, graphite finish Simon 500 Cima range, category 6A FTP. Compatible with RJ45 connectors of Keystone I, II, ATT ® / Avaya ®. Single Angled Plate. Plate for 1 and 2 RJ45. The plate includes clips for fastening in vertical and horizontal housings without the need for an adaptor. Dimensions 50 x 50 x 54 mm Supports Cabling 22-24 AWG. Metal components with self-extinguishing and halogen-free thermoplastic insulation that guarantees no flame propagation in case of fire and low toxicity in case of smoke resistant to corrosion and to changes in the temperature (-5 to 60 °C). Easy maintenance, clean with a soft, dry cloth is recommended not to use abrasive cleaners containing chlorine.

FINISH

Graphite

COMPATIBILITY

Simon 500 Cima enclosures

PACKAGING CONTENTS

Angled voice and data plate with dust cover, 2 RJ45 category 6A FTP and installation manual

ETIM CLASS

EC000018

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-24 AWG wiring

RJ45 CONNECTION
Without insertion tool

CONNECTOR CHARACTERISTICS
category 6A FTP

NUMBER OF CONNECTORS
2

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
1

PLATE TYPE
Angled

RAL
7021

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.073

PRODUCT NET WEIGHT
0.073

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053097595

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
80

PACKAGING WIDTH
224

PACKAGING LENGTH
290

PACKAGING MEASUREMENT UNIT
MMT

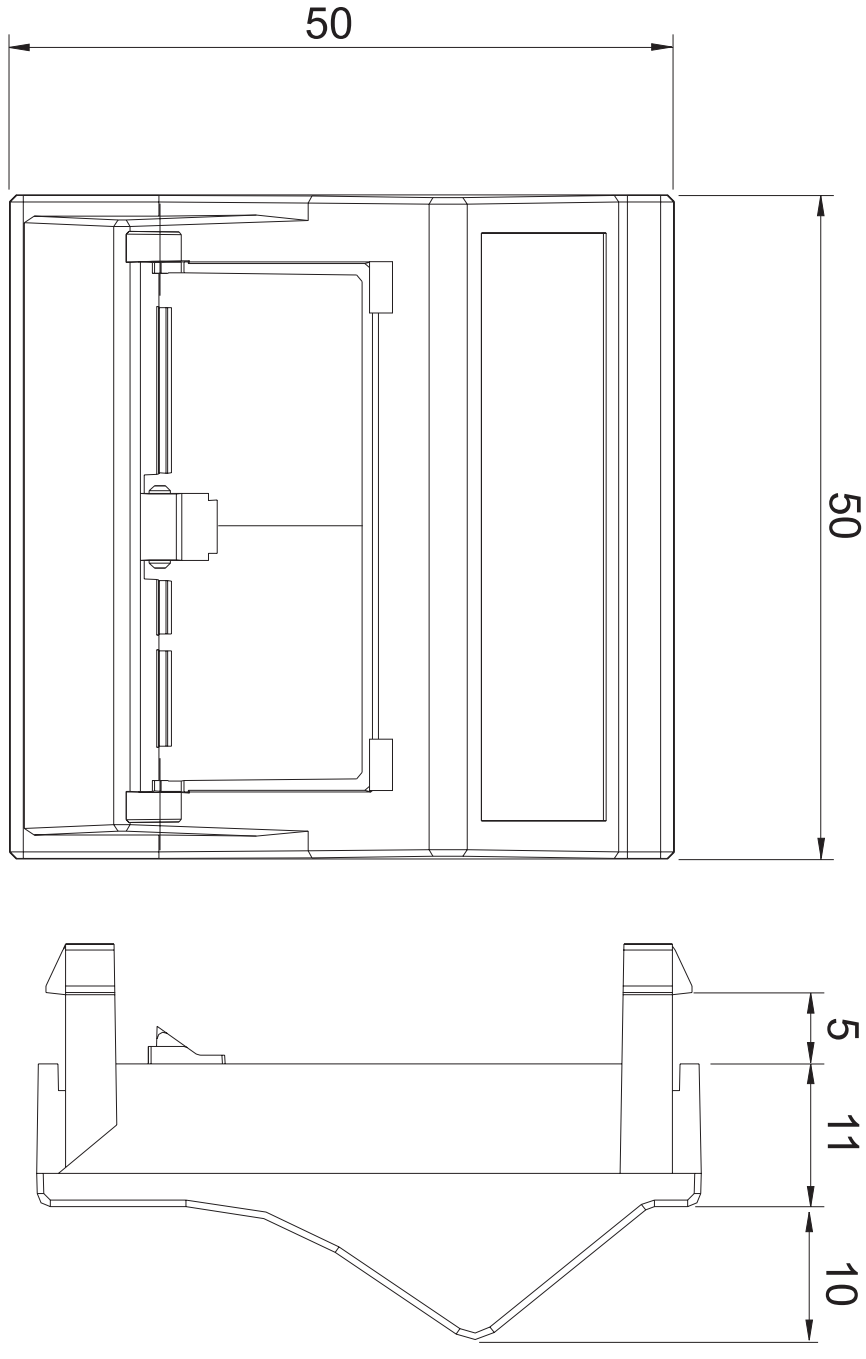
PACKAGING VOLUME
0.052

PACKAGING VOLUME UNIT
HLT

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.46

PACKAGING WEIGHT UNIT
KGM


50
50
5
11
10