



CorePro GLASS LED candles and lustres



CorePro LEDLusterND6.5-60W P45 E14827FRG

Featuring a classic heritage design, these filament LED candles combine the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb is a very easy choice for people who are looking for a retrofit LED replacement, it provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

Product data

| General Information | |
|--|--------------------|
| Cap base | E14 |
| Nominal lifetime | 15,000 h |
| Switching Cycle | 20,000 |
| Lighting Technology | LED |
| Flux measurement reference | Sphere |
| | |
| Light Technical | |
| Colour Code | 827 [CCT of 2700K] |
| Luminous Flux | 806 lm |
| Luminous efficacy (rated) (nom.) | 124.00 lm/W |
| Colour designation | Warm White (WW) |
| Correlated Colour Temperature | 2700 K |
| Colour consistency | <6 |
| Colour rendering index (CRI) | 80 |
| LLMF at end of nominal lifetime (nom.) | 70 % |
| Flickering value (PstLM) | 1 |
| Stroboscopic effect | 0.9 |
| | |

| Photobiological safety according to EN 62471 RG1 | | |
|--|-------------|--|
| | | |
| Operating and Electrical | | |
| Line Frequency | 50 to 60 Hz | |
| Input frequency | 50 to 60 Hz | |
| Power Consumption | 6.5 W | |
| Lamp current (nom.) | 50 mA | |
| Wattage equivalent | 60 W | |
| Starting time (nom.) | 0.5 s | |
| Warm-up time to 60% light | 0.5 s | |
| Power Factor (Fraction) | 0.55 | |
| Voltage (nom.) | 220-240 V | |
| | | |
| Temperature | | |
| T-Case maximum (nom.) | 55 ℃ | |
| , , , | | |


Datasheet, 2023, April 14 data subject to change

CorePro GLASS LED candles and lustres

| Controls and Dimming | |
|-------------------------------------|---------|
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Lamp Finish | Frosted |
| Bulb shape | P45 |
| | |
| Approval and Application | |
| Energy Efficiency Class | E |
| Energy consumption kWh/1,000 hours | 7 kWh |
| EPREL registration number | 1825183 |
| CE mark | Yes |
| EU RoHS compliant | Yes |
| EyeComfort | Yes |
| | |
| Application Conditions | |
| Can it be used in closed luminaires | No |
| | |


| CorePro LEDLusterND6.5-60W P45 |
|--------------------------------|
| E14827FRG |
| CorePro LEDLusterND6.5-60W P45 |
| E14827FRG |
| 871951434760100 |
| 34760100 |
| 929002028792 |
| 1 |
| 0.014 kg |
| 8719514347601 |
| 10 |
| 8719514347618 |
| |

Dimensional drawing




| Product | D | С |
|--|-------|-------|
| CorePro LEDLusterND6.5-60W P45 E14827FRG | 45 mm | 80 mm |

Photometric data




General uniform lighting - CorePro LEDLusterND6.5-60W P45 E14827FRG

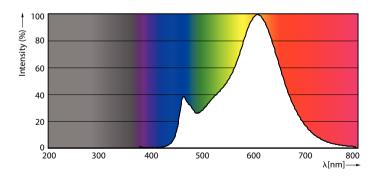

Spectral Power Distribution Colour - CorePro LEDLusterND6.5-60W P45 E14827FRG


CorePro GLASS LED candles and lustres


Photometric data



Light Distribution Diagram - CorePro LEDLusterND6.5-60W P45 E14827FRG

Lifetime

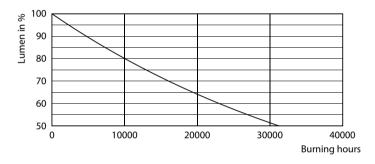



Lumen Maintenance Diagram - CorePro LEDLusterND6.5-60W P45 E14827FRG

Life Expectancy Diagram



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.