

BLADE EXPRESS DUAL TEST EMERGENCY EXIT SIGN

3.5W, IP20



PRODUCT INFORMATION DOCUMENT

FEATURES

- Designed for fast, hassle-free setup, saving installation time
- Manual or self-test functionality selection using built-in switch
- Maximum viewing distance of 24m
- Adjustable illuminated sign can be suspended by up to 1m
- Independent legends can be easily installed or swapped out as needed
- LiFePO4 battery technology provides fast charging and high number of charge/discharge cycles

CONSTRUCTION

- Polycarbonate housing
- PMMA light guide plate
- Stainless steel suspension cables



WARRANTY



LIFETIME



LUMENS
PER W



IK RATING



IP RATING



OPERATING
VOLTAGE



BEAM ANGLE



SAFETY
CLASS



CCT



TESTING



TESTING



BATTERY

Product Code:	RBE4DT-01
Comparable to:	8W T5 fluorescent
Total Power (W):	3.5
Power Factor:	0.5
Total Light Output (lm):	40
Total Emergency Light Output (lm):	30
Efficacy (lm/cctW):	16
Lux at 1m (lux):	3
Emergency Lux at 1m (lux):	2
CCT (K):	6500
CRI:	70
IP:	20
Operation Temperature (°C):	0 ≤ Ta ≤ +40
Inrush Current:	1.8A/10µs
RG Value:	0
SDCM:	<6
Pst LM:	NA
SVM:	NA
Energy Class:	NA
Rated Life to L70B50 (Hrs):	30000
Dimensions LxWxH (mm):	275x35x460
Weight (kg):	0.6

Separate Control Gear Information	
Type of Light Source:	LED
Full Load Efficiency (%):	NA
P _{NET} (W):	NA
Dimensions (mm):	NA

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

BLADE EXPRESS DUAL TEST
EMERGENCY EXIT SIGN

3.5W, IP20

Cone Illuminance Diagram


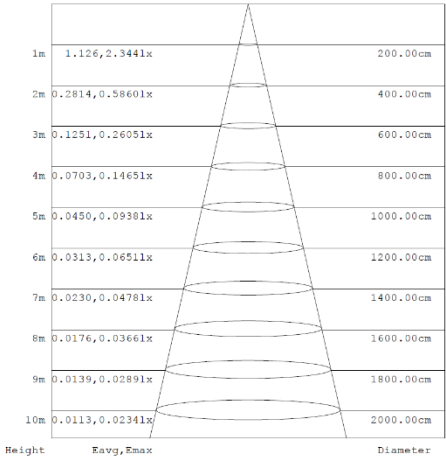


Diagram for RBE4DT-01 in 6500K. Other diagrams available on request

Dimension Diagram

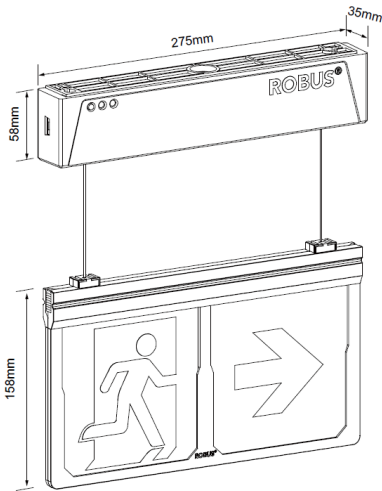

Polar Intensity Diagram

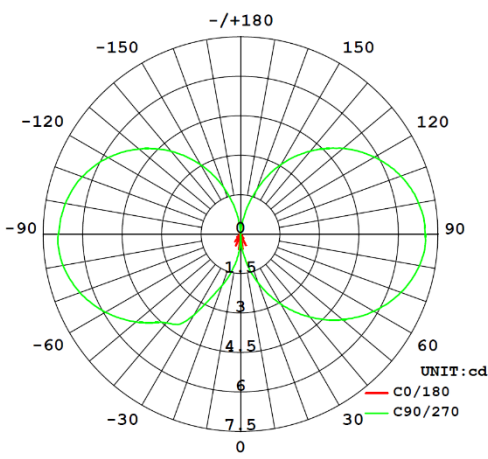


Diagram for RBE4DT-01 in 6500K. Other diagrams available on request

Accessories

NA

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE