




Pinguino EM82K

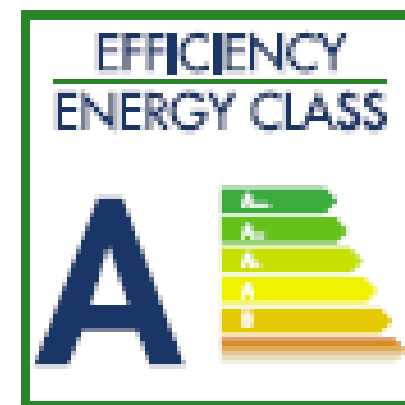

A Energy Efficiency

Perfect match of most advanced technology and low consumption, Pinguino PAC EM82K is A class of Energy Efficiency.



New Eco Design

Featuring a stylish and innovative design, Pinguino PAC EM82K is kind to the environment



700 Times Ecofriendly

Pinguino uses refrigerant gas R290, which is up to 696 times more environmentally friendly than traditional gases****



Soft Touch Control Panel

PAC EM82K has an user-friendly soft-touch control panel for an easy use of all desired functions.



PAC EM82K

- Pinguino PAC EM82K
- Cooling capacity 9400 Btu/h* - 2,4 kW
- Cooling Energy Class A
- Fan function
- Dehumidifying function
- Exclusive condensate recirculation system
- 3 fan speed (min-med-max)
- Soft touch control panel
- Remote control with LCD display
- 24 h electronic timer and thermostat
- Handles and castors for easy transportation
- Eco-Design
- Continuous drainage system
- 1,25 m outlet hose and window kit included
- R290 ECO-friendly gas up to 696 times more environmentally friendly than traditional gases****



Technical Data	Unit	DATA
Maximum cooling capacity	BTU/h * – Kw**	9.400– 2,4
Energy Efficiency Ratio (EER)	(W/W)	2,6
For rooms up to	m ³	80
Refrigerant gas		R290
Energy Efficiency Class		A
Rated voltage – frequency	V~Hz	220-240~50
Input power**	W	1000
Standby consumption	W	0,8
Maximum sound power level	dB(A)	63
Noise pressure level (min-max)	dB(A)	47-50
Air flow(min-med-max)	m ³ /h	340-370-400
Max dehumidifying (dehum. mode)	l/24h	43
Dimensions (hxlxp)	mm	700x425x345
Weight	Kg	31,5

* 35°C/80% R.H.

** 35°C/40% R.H. (EN14511)

***Internal test, initial condition 30° C and 40%RH

****696 times compared to the impact of Global Warming of R410 - F-Gas Reg. 517/2014.

***** Tested in our laboratory by comparing the maximum sound level using max. fan speed vs sound level with min. fan speed