


# Data sheet



Time / Immersion & General Purpose Time Switches

FBT4N – 4 Hour Boost Timer & Fused Spur

## Product Image & Line Diagram

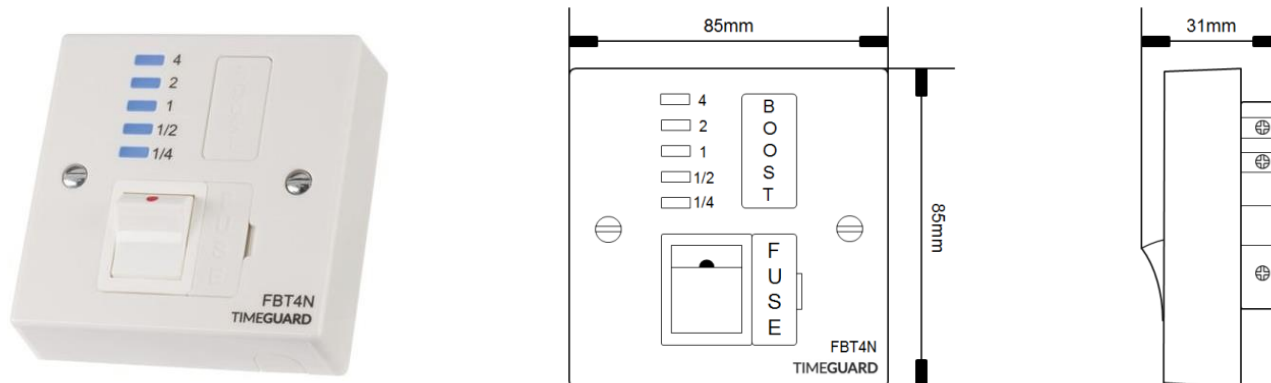

## Technical Data

General	
Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Min Depth of Wall Box	25mm, Single gang back box or pattress
Contact Type	Normally open
Class Protection	Class II
Number of Channels	1
Switch Rating	3kW Immersion Heaters. 1000W Incandescent/Halogen, 500W fluorescent, 200W LED, 100W CFL Lighting.
Rocker Switch	Double pole, 13A
Fuse	BS1362 13A (Supplied)
Output Indicator	Yes, LED's adjacent to the time marker
Boost Function	5 On Times ¼ hour, ½ Hour, 1 Hour, 2 Hour or 4 Hour
Operating Temperature	0°C to 45°C
Accessories (Included)	Instructions, Fittings
Accessories (Optional)	None
Dimensions	Height 85mm, Width 85mm, Depth 31mm
Weight	164.1g Unpacked
EAN	5012483015179
Designed In Accordance To	BS EN 60730-1, BS EN 60730-2-7, BS 1363-4 <small>Includes updates and amendments.</small>
Guarantee Period	3 Years
Construction	
Casing	Polycarbonate



A theben Group Company

Article Number: FBT4N DS110220V1



Timeguard Ltd reserves the right to withdraw, improve or modify any design without prior notification. Timeguard Ltd cannot be held responsible for the incorrect application of any product.  
Additional information can be found at: [www.timeguard.com](http://www.timeguard.com)