



# CorePro LEDcandle



## CorePro lustre ND 7-60W E14 827 P48 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

### Product data

General Information	
Cap base	E14
Nominal lifetime	15,000 h
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Colour Code	827 [CCT of 2700K]
Luminous Flux	806 lm
Luminous efficacy (rated) (nom.)	115.00 lm/W
Colour designation	Warm White (WW)
Correlated Colour Temperature	2700 K
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %
Flickering value (PstLM)	1
Stroboscopic effect	0.4
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz


Power Consumption	7 W
Lamp current (nom.)	59 mA
Wattage equivalent	60 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.51
Voltage (nom.)	220-240 V
Temperature	
T-Case maximum (nom.)	87 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Frosted
Bulb shape	P48
Approval and Application	
Energy Efficiency Class	E
Energy consumption kWh/1,000 hours	7 kWh
EPREL registration number	453214
CE mark	Yes

# CorePro LEDcandle

EU RoHS compliant	Yes
EyeComfort	Yes
<b>Application Conditions</b>	
Can it be used in closed luminaires	No
<b>Product Data</b>	
Order product name	CorePro lustre ND 7-60W E14 827 P48 FR
Full product name	CorePro lustre ND 7-60W E14 827 P48 FR
Full EOC	871951431304000


Order code	31304000
Material no. (12 NC)	929002973102
Numerator – quantity per pack	1
Net Weight (Piece)	0.023 kg
EAN/UPC – Product/Case	8719514313040
Numerator – packs per outer box	10
EAN/UPC – Case	8719514313057

## Dimensional drawing

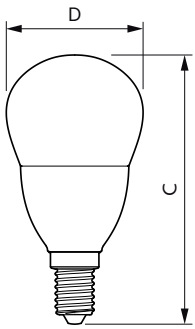


Product	D	C
CorePro lustre ND 7-60W E14 827 P48 FR	48 mm	93 mm

## Photometric data

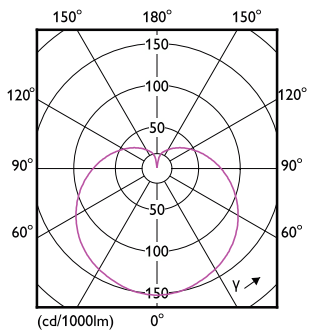


Light Distribution Diagram - CorePro lustre ND 7-60W E14 827 P48 FR

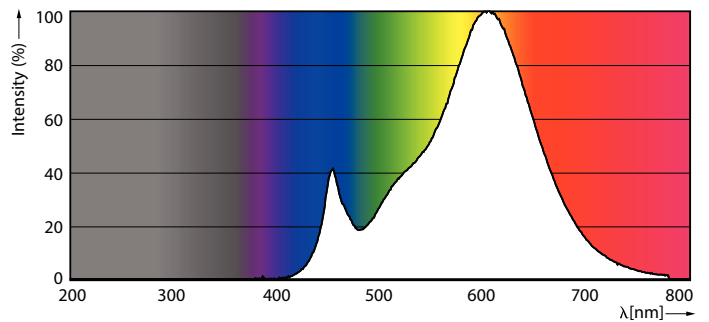

Spectral Power Distribution Colour - CorePro lustre ND 7-60W E14 827 P48 FR

# CorePro LEDcandle

## Photometric data




Technical Parameters 43 Philips Lighting B.V. Page 10

General uniform lighting - CorePro lustre ND 7-60W E14 827 P48 FR

## Lifetime



Life Expectancy Diagram

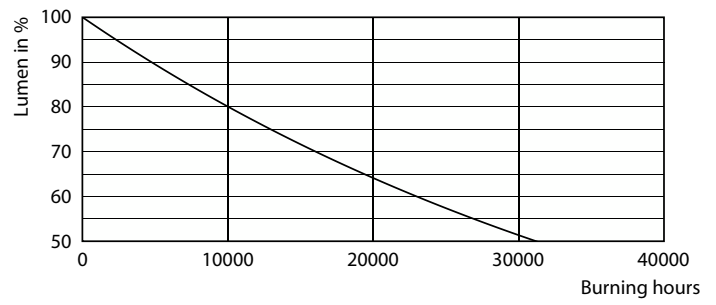

Lumen Maintenance Diagram - CorePro lustre ND 7-60W E14 827 P48 FR

