



# FirestayLED

CCT 3 way selectable colour switch


## Integrated LED Fixed Downlight

- FireStay Certification: 30, 60 and 90 minute solid joist ceilings  
30 minute I-Joist ceiling systems
- Fixed Downlight IP65
- Fixed Downlight Front CCT switch
- 6 in 1 Fixture, 3 colour temperatures, 2 bezel
- Includes satin & white magnetic bezels
- Part B / C / E compliant
- IC rated
- 7 year Guarantee (Excluding Battery)<sup>3</sup>

IC Rated up to  
350mm insulation




Quick Fix Connector  
Tool Free Termination

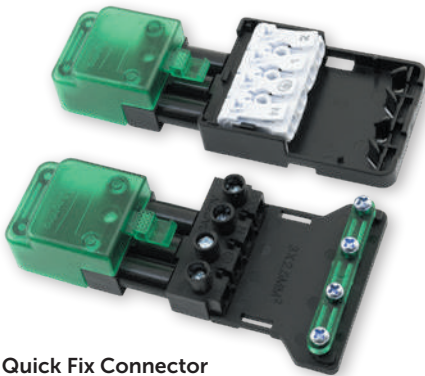


Quick Fix Connector  
Screw Fix Termination

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

Selectable Colour Temperature



Simply move the switch located under the magnetic bezel to your desired colour temperature

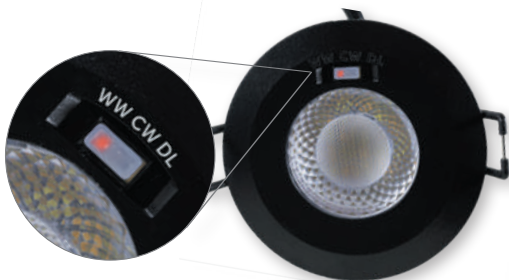

Universal LED Trailing Edge Dimmer Module:

LED Dimmable bulb - Min 5W ~ Max 100W - 10 Downlights maximum

LED Dimmable driver - Min 5W ~ Max 100W - 10 Downlights maximum

Code: 10801





# FirestayLED


CCT 3 way selectable colour switch

## Technical Specification


| Data           |  |
|----------------|--|
| Construction   | Die-Cast Aluminium   |
| Driver         | On Board   |
| LED Chip       | Epistar  |
| IP Rating      | IP65   |
| Operating Temp | -5°C to +35°C  |
| Input Voltage  | 220 - 240V   |
| Power Factor   | > 0.9  |
| CRI            | 85 - Exceeds EU standard of Ra 80 for Colour Rendering Index |
| LMR            | 80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio  |

\* All BELL Lighting luminaires are rated L80 B10, so for a 50,000 hour product. L80B10 at 50,000 hours our fittings will still have 80% of initial lumen, only 10% of fittings will fail to achieve this.

08187 7W

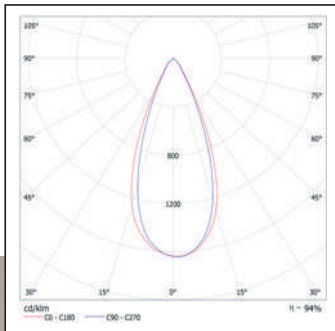

08186/08187/10510

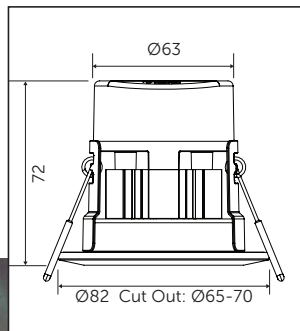

| Code  | Description  | Colour Temperature | lm          | cd  | Beam <sup>0</sup> | Hrs   |
|-------|--|--------------------|-------------|-----|-------------------|-------|
| 08186 | 7W Firestay LED CCT 3 Way Selectable Colour Switch Downlight Dimmable, Plug & Play, 60° Beam Angle. <b>Screw Fix Termination</b> | 3000K/4000K/6000K  | 530/550/600 | 370 | 60°               | 50000 |
| 08187 | 7W Firestay LED CCT 3 Way Selectable Colour Switch Downlight Dimmable, Plug & Play, 40° Beam Angle. <b>Screw Fix Termination</b> | 3000K/4000K/6000K  | 530/550/600 | 530 | 40°               | 50000 |
| 10510 | 7W Firestay LED CCT 3 Way Selectable Colour Switch Downlight Dimmable, Plug & Play, 40° Beam Angle. <b>Tool Free Termination</b> | 3000K/4000K/6000K  | 530/550/600 | 530 | 40°               | 50000 |
| 10560 | Chrome Magnetic Bezel for above  | -                  | -           | -   | -                 | -     |
| 10561 | Brass Magnetic Bezel for above   | -                  | -           | -   | -                 | -     |
| 10562 | Antique Brass Magnetic Bezel for above   | -                  | -           | -   | -                 | -     |
| 10563 | Matt Black Magnetic Bezel for above  | -                  | -           | -   | -                 | -     |
| 08193 | White Spacer Plate for above (100mm cut out)   | -                  | -           | -   | -                 | -     |
| 08194 | Satin Spacer Plate for above (100mm cut out)   | -                  | -           | -   | -                 | -     |



<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio  
<sup>2</sup> Exceeds EU standard of RA 80 for Colour Rendering Index  
<sup>3</sup> Subject to terms & conditions (Contact Customer Service)