




# nexus metal wiring accessories

Premium metal accessories, in a range of superior quality finishes that will complement any interior decor

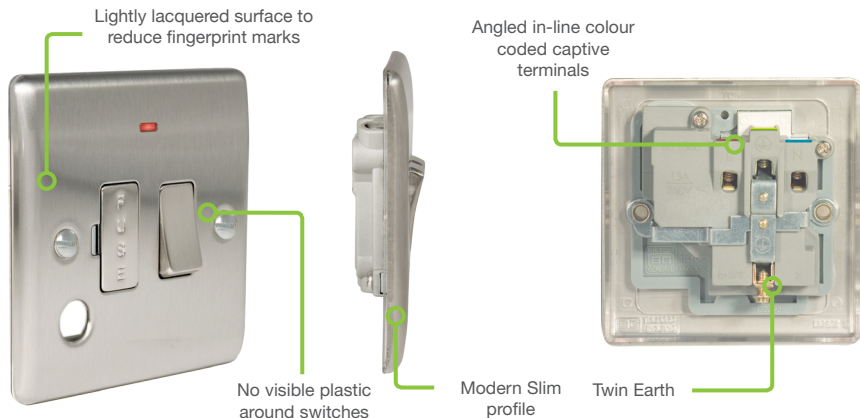

Switches & Sockets	3
Round Pin & Export	4
FCUs	4
45 Amp Switches	5
Co-ax & Satellite	5
Telephone & Data	6
Dimmers	6
Shaver Sockets	7
Blank Plates	7
Key Card Switch	8
Accessories	8

Nexus Metal is available in three stocked finishes



Brushed Steel



Polished Chrome



Black Nickel

Extended range of six additional colour finishes now available for sixteen products



Matt Black



Antique Brass



Cream



Pearl Nickel



Brushed Iridium



Gloss White

For specification projects, BG can offer a wider selection of finishes. Or, if the project demands, any finish can be created to suit the requirement.

Cat No.										Description	Inner Carton	Outer Carton
<b>10 Amp 10AX Plate Switches</b>												
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel				
NBS12	NPC12	NBN12	NAB12	NBI12	NCR12	NPW12	NMB12	NPR12	1 gang, 2 way	5	50	
NBS13	NPC13	NBN13	NAB13	NBI13	NCR13	NPW13	NMB13	NPR13	intermediate	5	50	
NBS14	NPC14	NBN14	-	-	-	-	-	-	bell push **	5	50	
NBS15	NPC15	NBN15	-	-	-	-	-	-	3 pole fan isolator	5	50	
NBS42	NPC42	NBN42	NAB42	NBI42	NCR42	NPW42	NMB42	NPR42	2 gang, 2 way	5	50	
NBS43	NPC43	NBN43	NAB43	NBI43	NCR43	NPW43	NMB43	NPR43	3 gang, 2 way	5	50	
NBS44	NPC44	NBN44	-	-	-	-	-	-	4 gang, 2 way	5	50	

- Plate switches manufactured to BS EN 60669-1, fan isolator to IEC 60669-2-4.
- Terminal capacity 4 x 1.0mm<sup>2</sup>, 4 x 1.5mm<sup>2</sup>, 2 x 2.5mm<sup>2</sup> & 1 x 4.0mm<sup>2</sup>
- Captive terminal screws

- Minimum mounting box depth:
  - 1 & 2 gang 16mm
  - 3 & 4 gang 25mm

\*\*Bell push switch made to order, contact Customer Services for more details



<b>13 Amp Switched Socket Outlets</b>											
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS21W	NPC21W	-	-	-	-	-	-	-	1 gang	5	50
NBS21B	-	NBN21B	NAB21B	NBI21B	NCR21B	NPW21B	NMB21B	NPR21B		5	50
NBS21G	-	-	-	-	-	-	-	-			
NBS22W	NPC22W	-	-	-	NCR22W	NPW22W	NMB22W	NPR22W	2 gang	5	50
NBS22B	-	NBN22B	NAB22B	NBI22B	-	-	-	-		5	50
NBS22G	-	-	-	-	-	-	-	-			



- Manufactured to BS 1363 part 2
- Brushed Steel insert colours = White (W), Grey (G) and Black (B)
- Terminal capacity 3 x 2.5mm<sup>2</sup>, 3 x 4.0mm<sup>2</sup> & 2 x 6.0mm<sup>2</sup>
- Minimum mounting box depth 25mm
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008


<b>13 Amp Switched Socket with USB Charger</b>											
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS22UW	NPC22UW	-	-	-	NCR22UW	NPW22UW	-	NPR22UW	2 gang + 2 USB (2.1A), White Insert	5	50
NBS22UG	-	-	-	-	-	-	-	-	2 gang + 2 USB (2.1A), Grey Insert	5	50
NBS22UB	-	NBN22UB	NAB22UB	NBI22UB	-	-	NMB22UB	-	2 gang + 2 USB (2.1A), Black Insert	5	50



- Ideal for charging iPad, iPhone, tablets, mobiles, cameras and more
- 2 x Type A USB sockets - 2.1A total output, 5V
- Minimum mounting box depth 25mm - ideal for retrofit.
- Twin earth fitted as standard
- Terminal capacity 3 x 2.5mm<sup>2</sup>, 3 x 4.0mm<sup>2</sup> & 2 x 6.0mm<sup>2</sup>
- 10 year guarantee



Cat No.		Description	Inner Carton	Outer Carton
<b>Combination Plate</b>				
Brushed Steel	Polished Chrome			
NBS222EM8G	NPC222EM8W	2 x 2g Socket + 2 x 4 Module Aperture	5	50

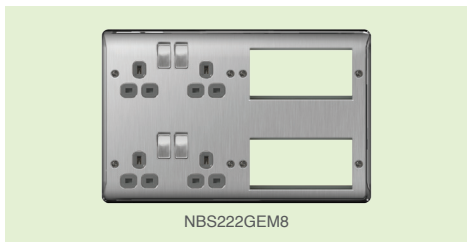

- Twin earth fitted as standard
- Manufactured to BS 1363 Part 2
- Terminal capacity 3 x 2.5mm<sup>2</sup>, 3 x 4.0mm<sup>2</sup> & 2 x 6.0mm<sup>2</sup>
- Mounting box depth 47mm (HGS07/C4)
- Modules of mains and extra low voltage rating must not be fitted to the same front plate aperture Ref. BS 7671:2008

\* See our Euro Module range for further Telecom, Data and Co-axial Options

Cat No.			Description	Inner Carton	Outer Carton
<b>Round Pin and Export Socket Outlets</b>					
Brushed Steel	Polished Chrome	Black Nickel			
NBS28W	NPC28W	NBN28B	2A unswitched socket round pin	5	50
NBS28G	-	-			
NBS29W	NPC29W	NBN29B	5A unswitched socket round pin	5	50
NBS29G	-	-			
NBS99W	NPC99W	NBN99B	15A 1 gang switched socket	5	50
NBS99G	-	-			
NBS98W	NPC98W	NBN98B	16A 2 gang unswitched Euro socket	5	50
NBS98G	-	-			



- 2/5/15A Manufactured to BS 546
- Brushed Steel insert colours = White (W) & Grey (G)
- Minimum mounting box depth 25mm

Cat No.		Description							Inner Carton	Outer Carton
<b>13 Amp Fused Connection Units</b>										
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel		
NBS50	NPC50	NBN50	NAB50	NBI50	NCR50	NPW50	NMB50	NPR50	Switched	5 50
NBS52	NPC52	NBN52	-	-	-	-	-	-	Switched w/ power indicator	5 50
NBS53	NPC53	NBN53	-	-	-	-	-	-	Switched w/ power indicator & cable outlet	5 50
NBS54	NPC54	NBN54	-	-	-	-	-	-	Unswitched	5 50
NBS55	NPC55	NBN55	-	-	-	-	-	-	Unswitched w/ cable outlet	5 50



- Manufactured to BS 1363 part 4
- Minimum mounting box depth 35mm
- Angled colour coded terminals with captive screws
- Terminal capacity 3 x 2.5mm<sup>2</sup>, 2 x 4.0mm<sup>2</sup> & 1 x 6.0mm<sup>2</sup>

Cat No.										Description	Inner Carton	Outer Carton
<b>20 Amp Double Pole Switches</b>												
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel				
NBS31	NPC31	NBN31	NAB31	NBI31	NCR31	NPW31	NMB31	NPR31	w/ power indicator	5	50	



- Manufactured to BS EN 60669-1
- Colour coded terminals with captive angled screws
- Terminal capacity 3 x 2.5mm<sup>2</sup>, 2 x 4.0mm<sup>2</sup> & 1 x 6.0mm<sup>2</sup>
- Minimum mounting box depth 25mm

<b>45 Amp Double Pole Switches</b>												
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel				
NBS70W	NPC70W	NBN70B	NAB70B	NBI70B	NCR70B	NPW70B	NMB70B	NPR70B	w/ 13A socket & power indicators	5	50	
NBS70B	-	-	-	-	-	-	-	-				
NBS70G	-	-	-	-	-	-	-	-				
NBS72	NPC72	NBN72	-	-	-	-	-	-	w/ power indicator, double plate	5	50	
NBS74	NPC74	NBN74	NAB74	NBI74	NCR74	NPW74	NMB74	NPR74	w/ power indicator, single plate	5	50	



- Cooker Control Units manufactured to BS4177, Double Pole Switches to BS EN 60669-1
- Brushed Steel insert colours = White (W), Grey (G) & Black (B)
- L & N terminal capacity 4 x 4.0mm<sup>2</sup>, 3 x 6.0mm<sup>2</sup> & 1 x 16.0mm<sup>2</sup>
- E terminal capacity 3 x 4.0mm<sup>2</sup>, 2 x 6.0mm<sup>2</sup> & 1 x 16.0mm<sup>2</sup>
- Minimum mounting box depth 47mm

<b>Co-Axial and Satellite Sockets</b>												
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel				
NBS60	NPC60	NBN60	NAB60	NBI60	NCR60	NPW60	NMB60	NPR60	Co-ax, 1 gang	5	50	
NBS61+	NPC61+	NBN61+	-	-	-	-	-	-	Co-ax, 2 gang	EM	-	
NBS62+	NPC62+	NBN62+	-	-	-	-	-	-	Isolated co-ax, 1 gang	EM	-	
NBS63+	NPC63+	NBN63+	-	-	-	-	-	-	Isolated co-ax, 2 gang	EM	-	
NBS64+	NPC64+	NBN64+	-	-	-	-	-	-	Satellite, 1 gang	EM	-	
NBS65+	NPC65+	NBN65+	-	-	-	-	-	-	Satellite and co-ax, 2 gang	EM	-	
NBS66+	NPC66+	NBN66+	-	-	-	-	-	-	Diplex TV/FM, 2 gang	EM	-	
NBS67+	NPC67+	NBN67+	-	-	-	-	-	-	Triplex TV/FM/Sat - Screened	EM	-	
NBS68+	NPC68+	NBN68+	-	-	-	-	-	-	Triplex TV/FM/Sat + Return & 1 gang Tel - Screened	EM	-	
NBS69+	NPC69+	NBN69+	-	-	-	-	-	-	Quadplex TV/FM/Sat (x2) + Return & 1 gang Tel - Screened	EM	-	

\* See our Euro Module range for further Telecom, Data and Co-axial Options



- Manufactured to BS 5733
- EM = Euro Module configuration
- + Supplied as kit of Euro Module components
- Co-axial and satellite minimum mounting box depth 25mm
- Insert colours -  
Polished Chrome = White, Brushed Steel = Grey  
Black Nickel = Black
- Triplex minimum mounting box depth 35mm


Cat No.									Description	Inner Carton	Outer Carton
<b>Telephone and Data Outlets</b>											
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBSBTM1	NPBCTM1	NBNBTM1	NABBTM1	NBIBTM1	NCRBTM1	NPWBTM1	NMBBTM1	NPRBTM1	Tel. master, 1 gang	5	50
NBSBTM2 <sup>+</sup>	NPBCTM2 <sup>+</sup>	NBNBTM2 <sup>+</sup>	-	-	-	-	-	-	Tel. master, 2 gang	EM	-
NBSBTS1	NPBCTS1	NBNBTS1	NABBTS1	NBIBTS1	NCRBTS1	NPWBTS1	NMBBTS1	NPRBTS1	Tel. slave, 1 gang	5	50
NBSBTS2 <sup>+</sup>	NPBCTS2 <sup>+</sup>	NBNBTS2 <sup>+</sup>	-	-	-	-	-	-	Tel. slave, 2 gang	EM	-
NBSRJ111	NPCRJ111	NBNRJ111	-	-	-	-	-	-	RJ11, 1 gang	5	50
NBSRJ112 <sup>+</sup>	NPCRJ112 <sup>+</sup>	NBNRJ112 <sup>+</sup>	-	-	-	-	-	-	RJ11, 2 gang	EM	-
NBSRJ451	NPCRJ451	NBNRJ451	-	-	-	-	-	-	RJ45 data, 1 gang	5	50
NBSRJ452 <sup>+</sup>	NPCRJ452 <sup>+</sup>	NBNRJ452 <sup>+</sup>	-	-	-	-	-	-	RJ45 data, 2 gang	EM	-

- Manufactured to BS 6312-2 where applicable
- EM = Euro Module configuration

- + Supplied as kit of Euro Module components
- Minimum mounting box depth 35mm



<b>Fan Controller, 4 speed</b>												
Brushed Steel	Polished Chrome	Black Nickel										
NBS87	NPC87	NBN87	1 gang, 1 way rotary, 100W						5	50		

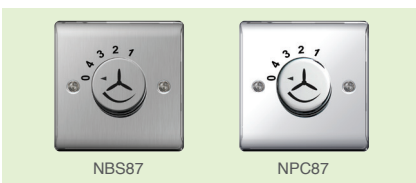

- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 35mm

<b>Dimmer Switches - Push On/Off</b>											
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS81P	NPC81P	NBN81P	NAB81P	NBIB81P	NCR81P	NPW81P	NMB81P	NPR81P	1 gang, 2 way, 400W	5	50
NBS82P	NPC82P	NBN82P	NAB82P	NBIB82P	NCR82P	NPW82P	NMB82P	NPR82P	2 gang, 2 way, 400W	5	50
NBS83P	NPC83P	NBN83P	-	-	-	-	-	-	3 gang, 2 way, 400W	5	50
NBS84P	NPC84P	NBN84P	-	-	-	-	-	-	4 gang, 2 way, 400W	5	50
NBS85P	NPC85P	NBN85P	-	-	-	-	-	-	1 gang, 1,000W - sq. plate (export only)	5	50

- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 10mm spacer available to provide additional wiring space (817 - Sq, 818 - Rect)

- Suitable for compact fluorescent lamps (CFL) and LED Dimming
- There can be issues with dimming CFL and LED lamps at a low lighting level. The Nexus dimmer products have an adjustable minimum level feature which can be used to adjust the lighting output at a low level, to stabilise the load.



Cat No.		Description							Inner Carton	Outer Carton	
<b>Shaver Socket</b>											
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS20G	NPC20W	NBN20B	-	-	-	-	-	-	115/230V dual voltage	5	50
NBS20W	-	-	-	-	-	-	-	-		5	50
NBS20B	-	-	NAB20B	NBI20B	NCR20B	NPW20B	NMB20B	NPR20B		5	50

- Manufactured to BS EN 61558-1 and BS EN 61558-2-5
- Terminal capacity 3 x 2.5mm<sup>2</sup> & 2 x 4.0mm<sup>2</sup>
- Mounting box depth 47mm

**INSERT COLOURS:** Polished Chrome = White, Brushed Steel = Grey (G), White (W) & Black (B), Black Nickel = Black



<b>Blank Plates</b>											
Brushed Steel	Polished Chrome	Black Nickel									
NBS94	NPC94	NBN94	1 gang							5	50
NBS95	NPC95	NBN95	2 gang							5	50

- Manufactured to BS EN 60670



<b>Euro Module Front Plates</b>											
Brushed Steel	Polished Chrome	Black Nickel									
NBSEMS1	NPCEMS1	NBNEMS1	Single Euro Module, single plate							10	100
NBSEMS2	NPCEMS2	NBNEMS2	Twin Euro Module, single plate							10	100
NBSEMR4	NPCEMR3	NBNEMR4	Quad Euro Module, double plate							5	50

- Manufactured with Earth Terminal



# Nexus Metal

Cat No.	Description	Inner Carton	Outer Carton
<b>16 Amp Hotel Key Card Switch</b>			
Brushed Steel	Polished Chrome	Black Nickel	
NBSKYCSG <sup>+</sup>	NPCKYCSW <sup>+</sup>	NBNKYCSB <sup>+</sup>	16 amp, hotel key card switch
			EM
			-




- 50 x 50mm Euro module
- Load Rating -  
1800W for resistive  
800W for inductive
- 30 second power-off delay
- Locator LED
- Mounting box depth 47mm
- Colour coded terminals with backed-out and captive screws
- Manufactured and manufactured to BS EN 60669-2-1
- † Supplied as kit of Euro Module components

Cat No.	Description	Inner Carton	Outer Carton
<b>13 Amp Double Pole Key Controlled Socket Outlet</b>			
NBSKYSWG <sup>+</sup>	13 amp, double pole key controlled socket outlet	EM	-



- Manufactured to BS 1363-2, BS EN 60669-1
- Mounting box depth 47mm
- Terminal capacity 3 x 2.5mm<sup>2</sup>, 2 x 4.0mm<sup>2</sup>, 1 x 6.0mm<sup>2</sup>
- Lockable socket, supplied with two keys
- DP switch
- † Supplied as kit of Euro Module components

<b>Spare Accessories</b>			
NFS19/10	M3.5 x 19mm screws, pack of 10 (For Chrome + Steel)	100pks	1000
NFS28/10	M3.5 x 28mm screws, pack of 10 (For Chrome + Steel)	100pks	1000
NFS38/10	M3.5 x 38mm screws, pack of 10 (For Chrome + Steel)	100pks	1000
NFS19/10BN	M3.5 x 19mm screws, pack of 10 (For Black Nickel)	100pks	1000
NFS28/10BN	M3.5 x 28mm screws, pack of 10 (For Black Nickel)	100pks <td 1000	
NFS38/10BN	M3.5 x 38mm screws, pack of 10 (For Black Nickel)	100pks	1000
NFS19/10BR	M3.5 x 19mm screws, pack of 10 (For Brass)	100pks	1000
NFS28/10BR	M3.5 x 28mm screws, pack of 10 (For Brass)	100pks	1000
NFS38/10BR	M3.5 x 38mm screws, pack of 10 (For Brass)	100pks	1000

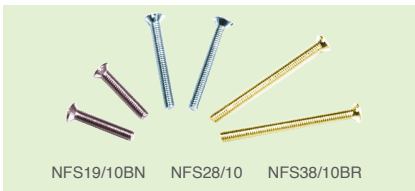



## Euro Module - Range Extension

A flexible solution of power, data, telephone, television and audio combinations to suit the wide ranging needs of the customer.




For full information see our [Euro Module range](#)

## Grid - Range Extension

A customisable selection of power grid modules that provide a seamless appearance with the associated wiring accessories.

- Firstly, screw the grid frame to the mounting box and wire the modules
- Then slot the module on to the frame and click into place
- Finally, fit the finished plate

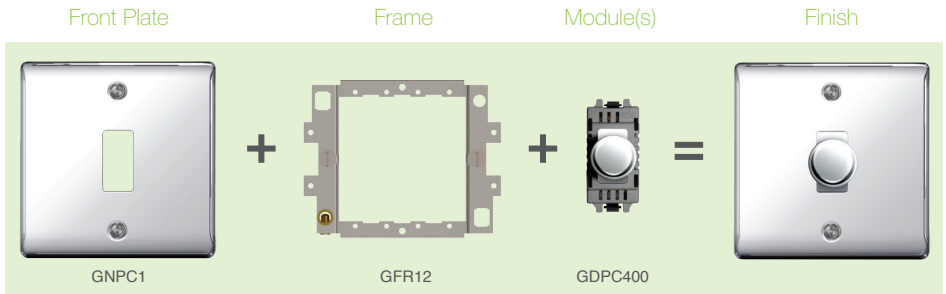


For full information see our [Nexus Grid range](#)



## 6 Additional finishes available in a limited range of products\*

- Finishes: Antique Brass, Brushed Iridium, Cream (chrome rockers), Gloss White (chrome rockers), Matt Black (chrome rockers) & Pearl Nickel
- Modern slim profile
- No visible plastic around switches
- Integral gasket for moisture protection
- Angled in-line colour coded captive terminals

\*Additional finish available in sixteen popular products

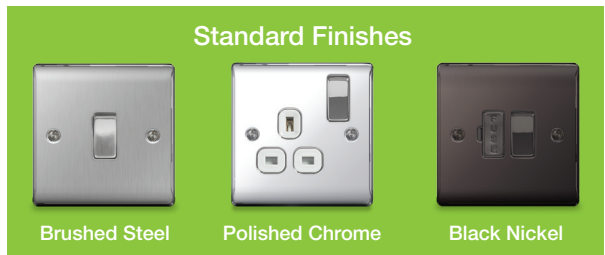

Notes:

---

**Head Office**

Email: info@luceco.com

Luceco Ltd  
Caparo House,  
103 Baker Street, London,  
United Kingdom, W1U 6LN

**UK:**

Tel: +44 (0) 1952 238 100  
Fax: +44 (0) 1952 238 180  
Email: sales@luceco.com

Nexus Industries Ltd  
Nexus Distribution Centre  
Stafford Park 1, Telford,  
Shropshire, England, TF3 3BD

**Germany:**

Tel: +49 40 89066 8780  
Fax: +49 40 89066 87829  
Email: eu\_sales@nexusinds.com

Nexus Industries GmbH  
Holstenplatz 20b  
22765 Hamburg, Germany

**France:**

Tel: +33 (0)7 88 29 56 59  
Fax: +33 (0)1 5731 74 19  
Email: fr\_sales@nexusinds.com

Nexus Industries SAS  
France & Belux  
3 Rue de CourtaIn  
Magny Le Hongre 77700  
FRANCE & BELUX

**Italy:**

Tel: +39 0434 1696795  
Fax: +39 0434 1696795  
Email: it\_sales@nexusinds.com

Nexus Italia, Via Amman 10  
33170 Pordenone, Italy

**Spain:**

Tel: +34 93 829 55 75  
Email: sp\_sales@nexusinds.com

Nexus Industries LTD  
C/ Bobinadora 1-5  
08302 Mataró  
Barcelona (SPAIN)

**Middle East:**

Tel: +971 4 609 1867  
Fax: +971 4 609 1868  
Email: mea\_sales@  
nexusinds.com

Luceco Middle East FZE  
Bldg. 5EB, Office 342,  
PO Box 371128, DAFZA,  
Dubai, UAE.

**Asia Pacific:**

Tel: +86 (0) 573 8357 0200  
Fax: +86 (0) 573 8357 0248  
Email: asia\_sales@nexusinds.cn

No 1438, Jiachuang Road,  
Xiuzhou Industrial Park, Jiaxing,  
Zhejiang, China, P.C. 314031

**North & South America:**

Tel: +1 281 978 2509  
Fax: +1 281 466 4620  
Email: us\_sales@luceco.com

Luceco Inc  
11050 West Little York Road  
Building C-2, Houston, Texas,  
USA 77041

**Africa:**

Tel: +27 11 432 6779  
Fax: +27 86 219 2099  
Email: africa\_sales@nexusinds.com

Unit 2, Cedar Wood Office Park  
Cnr. Western Service and  
Mount Lebanon Road Woodmead  
South Africa, 2144

# LUCECO

a Luceco Ltd. Group company



LUCECO

[www.bgelectrical.uk](http://www.bgelectrical.uk)