

JC010010/WH

## Fireguard Next Generation Downlight

Fireguard Next Generation Mains Twist and Lock Unlamped Downlight IP20 White



### Features & Benefits

- Slim profile, die-cast aluminium bezels
- Designed specifically for LED lamps
- Ultra fast press fit loop-in/loop-out terminal
- Tested for use in fire-rated ceilings
- IP20 rated (IP65 variant available)
- IP20 Tilt variant available
- Complies with 2014 building regulations: Part B, C and E



NOT SUPPLIED



RATING



CLASS I



WARRANTY

### General Information

Product Group

Product Range

Trade Name

Product Shape

Mounting

Product Weight

Color Finish

Overall Dimensions

Recommended Product Location

Minimum Void Requirement

Method Of Fix

Product Aperture Size

IP Rating

Environment

Suitable For Zones

Lamp Supplied

Diffuser / Shade Dimensions (mm)

**Fire-rated downlights**

**Fireguard® Next Generation**

**Fireguard®**

**Round**

**Recessed**

**0.171 kg**

**No Bezel**

**108.7 x 87 mm**

**indoor use only**

**150mm**

**Spring clips**

**74mm**

**IP20**

**Indoor**

**Outside Zone 2**

**No**

**87**

Distance From Lighted Object	<b>0.3m</b>
Duration of Fire protection ( Mins)	<b>Tested for use in fire-rated ceilings. Full information and up-to-date fire testing certificates for ceiling system types are available on JCC.CO.UK</b>
Origin of manufacturer	<b>Made in China</b>
Warranty	<b>2 year standard warranty (See Website for terms and conditions)</b>
Lighting Product Type 1	<b>Fired Rated Downlights</b>

## Electrical

Voltage Rating	<b>220-240</b>
Operating Frequency Hz	<b>50/60Hz</b>
Luminaire Circuit Wattage	<b>7W LED Max</b>
Class	<b>Class I, earth required</b>
Input Electrical Connections	<b>Live(Brown)Neutral(blue)Earth(yellow/green) - Loop in/Loop out press fit terminal</b>
Dimmable	<b>Check with lamp manufacturer</b>
Lampholder	<b>GU10 cap</b>

## Thermals

Room Ambient Temperature	<b>25°C</b>
Insulation Coverage	<b>see instruction sheet</b>
Minimum Void Requirement	<b>150mm</b>

## Performance Data

Energy Rating	<b>This product can contain a suitable light source of energy efficiency class from A to G</b>
---------------	--

## Construction

Rim Or Attachment	<b>Die-cast aluminium</b>
-------------------	---------------------------

## Packaging

Product Packaged Weight	<b>0.201kg</b>
Quantity Per Outer Carton	<b>20</b>
Outer carton(L)- cm	<b>47</b>
Outer carton(W)- cm	<b>21.5</b>
Outer carton(H)- cm	<b>22.5</b>
Outer carton overall dimensions	<b>47 x 21.5 x 22.5cm</b>
Outer carton Net weight- kg	<b>4.03kg</b>
Outer carton Gross weight- kg	<b>4.83kg</b>
Product Bar Code EAN-13 Number	<b>5052544105869</b>

## Standards & Approvals

Manufactured In Accordance To

CE Marked

UKCA Marked

Date code/Purchase order No.

WEEE Symbol

Certificate Of Conformity

Accredited Members

**BS EN 60598-2-1, 2-2**

**Yes**



**Yes**



**Yes**

**yes**

**Available on request**

**LIA, ISO9001:2015, ISO14001:2015**

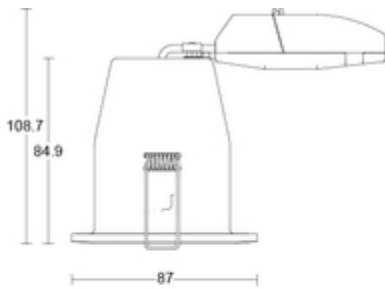

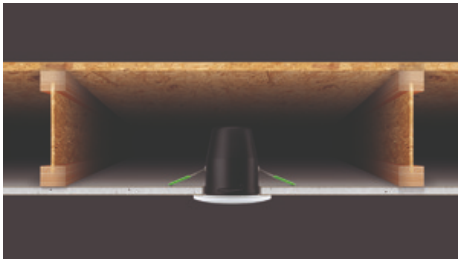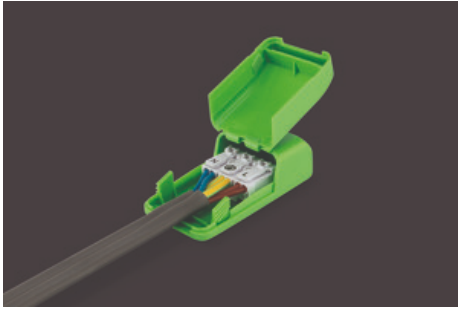

---

JCC Lighting LTD Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex PO22 9TS  
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | [sales@jcc.co.uk](mailto:sales@jcc.co.uk) | [www.jcc.co.uk](http://www.jcc.co.uk)  
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 110 [02 Jun 2021]