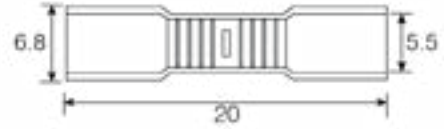


Product Code: QB16

Description: 16mm² Copper Butt Splice Terminal**Dimensions**

Maximum Cable Diameter (mm)	5.5
Overall Length (mm)	20
Outer Diameter (mm)	6.8

General Information

Contact Plating (Microns)	5 to 8
Conductor Size (mm ²)	16
Cable Stopper	Yes
Flared Entry	Yes
Conductivity	97% to IACS
Fixing Type	Suitable for crimp or solder
Working Temperature (°C)	<180

Materials

Material: Tin Plated Copper Tube

Additional InformationWhen using flexible fine strand or welding cable it may be necessary to select the next larger terminal size, i.e 70mm² fine strand, select 95mm² terminal**Standards**ANSI/UL 486A-486B, CAN/CSA-C22.2 No. 65
ANSI/UL 486C, CSA-C22.2 No. 188