

JC010023/BN

Fireguard Next Generation Tilt Downlight

Fireguard Next Generation Mains Twist and Lock Unlamped Downlight Tilt IP20
Brushed Nickel



Features & Benefits

- Slim profile, die-cast aluminium bezels
- Designed specifically for LED lamps
- Ultra fast press fit loop-in/loop-out terminal
- Tested for use in fire-rated ceilings
- 15° Tiltable inner bezel
- Complies with 2014 building regulations: Part B, C and E



NOT SUPPLIED



CLASS I



RATING



WARRANTY

General Information

Product Group	Fire-rated downlights
Product Range	Fireguard® Next Generation
Trade Name	Fireguard®
Product Shape	Round
Mounting	Recessed
Product Weight	0.264kg
Color Finish	Brushed nickel
Overall Dimensions	115.45 x 100mm
Recommended Product Location	indoor use only
Minimum Void Requirement	150mm
Method Of Fix	Spring clips
Product Aperture Size	85mm
IP Rating	IP20
Environment	Indoor
Suitable For Zones	Outside Zone 2
Lamp Supplied	No
Diffuser / Shade Dimensions (mm)	100

Distance From Lighted Object	0.3m
Duration of Fire protection (Mins)	Tested for use in fire-rated ceilings. Full information and up-to-date fire testing certificates for ceiling system types are available on JCC.CO.UK
Origin of manufacturer	Made in China
Warranty	2 year standard warranty (See Website for terms and conditions)
Lighting Product Type 1	Fired Rated Downlights

Electrical

Voltage Rating	220-240
Operating Frequency Hz	50/60Hz
Luminaire Circuit Wattage	7W LED Max
Class	Class I, earth required
Input Electrical Connections	Live(Brown)Neutral(blue)Earth(yellow/green) - Loop in/Loop out press fit terminal
Dimmable	Check with lamp manufacturer
Lampholder	GU10 cap

Thermals

Room Ambient Temperature	25°C
Insulation Coverage	see instruction sheet
Minimum Void Requirement	150mm

Performance Data

Energy Rating	This product can contain a suitable light source of energy efficiency class from A to G
---------------	--

Construction

Rim Or Attachment	Die-cast aluminium
-------------------	---------------------------

Packaging

Product Packaged Weight	0.30kg
Quantity Per Outer Carton	20
Outer carton(L)- cm	54
Outer carton(W)- cm	23.5
Outer carton(H)- cm	23.5
Outer carton overall dimensions	54.5 x 23.5 x 23.5cm
Outer carton Net weight- kg	6.01kg
Outer carton Gross weight- kg	6.81kg
Product Bar Code EAN-13 Number	5052544105845

Standards & Approvals

Manufactured In Accordance To

CE Marked

UKCA Marked

Date code/Purchase order No.

WEEE Symbol

Certificate Of Conformity

Accredited Members

BS EN 60598-2-1, 2-2

Yes



Yes




Yes

yes

Available on request

LIA, ISO9001:2015, ISO14001:2015

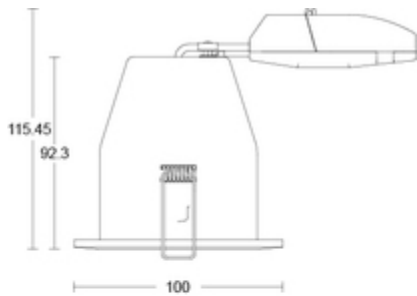

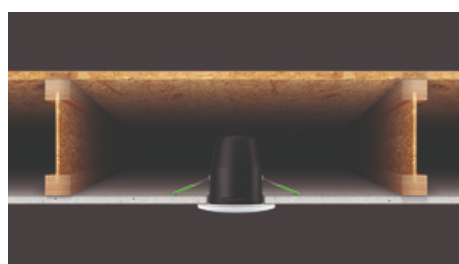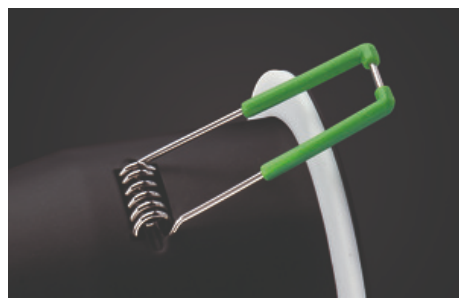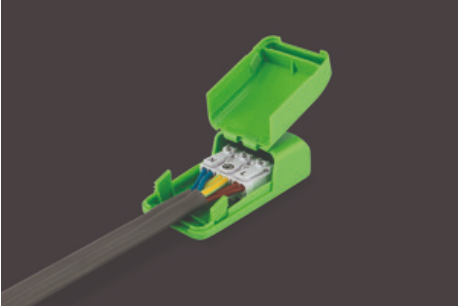

JCC Lighting LTD Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex PO22 9TS
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 67 [23 Apr 2021]