




**COLLINGWOOD
LIGHTING**



FEATURES & BENEFITS

- › Equivalent to 20W halogen
- › Long spike included for extra stability
- › Robust cable for outdoor use
- › Available in anodised aluminium, black and copper

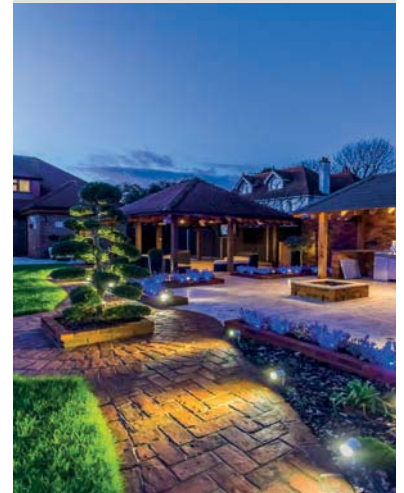

SL220A | SL020A BLK | SL320A

3W LED spike light



Ideal for use outdoors



3-year extended warranty available



Also available in RGB (SL220A / SL020A BLK) See page 275



Patent information: collingwoodlighting.com/patent

SL220A / SL020A BLK SL320A

ZONE

L70, B10

3SDCM

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	38°	SL220A F NW	>70Ra	310	103	705
	38°	SL020A BLK F NW	>70Ra	310	103	705
	38°	SL320A F NW	>70Ra	310	103	705
4000K	18°	SL220A S NW	>70Ra	310	103	2823
	18°	SL020A BLK S NW	>70Ra	310	103	2823
3000K	38°	SL220A F WW	>80Ra	265	88	602
	38°	SL020A BLK F WW	>80Ra	265	88	602
	38°	SL320A F WW	>80Ra	265	88	602
3000K	18°	SL220A S WW	>80Ra	265	88	2413
	18°	SL020A BLK S WW	>80Ra	265	88	2413
2700K NEW	38°	SL020A BLK F 27	>80Ra	261	87	593
	38°	SL320A F 27	>80Ra	261	87	593

GENERAL

Construction material SL220A / SL020A BLK: Anodised aluminium SL320A: Copper

WIRING

Cable / flying lead 3m H05RN-F rubberised cable (outside diameter: 6mm)

Type of wiring required Series

LED DRIVERS


Bathroom zone applicable to fitting only

Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	350	Yes	No	1	1	3
PLR/350 1-5	350	Yes	No	1	1	1
PLD UNI-DRIVE 350MA	350	Yes	Yes [1-10V]	2	1	3

For LED driver bathroom zone & additional LED drivers see page 290-295



ACCESSORIES

Product code	Description	
JB2 / JB4 / JB6	Waterproof junction box / Gel filled waterproof connectors	296-297
PDC/GRID DIMMER	1-10V dimmer module	296
GH220	Simple hood to reduce glare whilst maintaining a good light distribution	238
GS220	Stylish, baffle-style snoot, perfect for creating a moonlighting effect	238

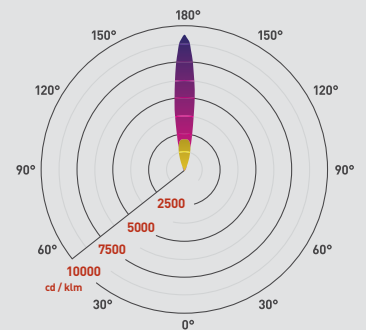

4000K 18° / 4000K 38°

Additional diagrams available at collingwoodlighting.com

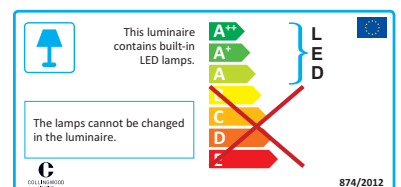

874/2012