



# MASTER VALUE LEDspot MV

## MASTER LED spot VLEDT4.9-50W GU10 927 36DUK

Delivering a warm, halogen-like accent beam, the MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it achieves more natural colours, creating cosy and comfortable ambience for residential and hospitality projects, and emphasising the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. The MASTER VALUE also offers more energy savings than normal LED spots.

### Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

### Product data


General Information	
Cap base	GU10
Nominal lifetime	25,000 h
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Colour Code	922-927 [CCT of 2200K-2700K]
Beam angle (nom.)	36 degree(s)
Luminous Flux	355 lm
Luminous intensity (nom.)	650 cd
Luminous efficacy (rated) (nom.)	72.00 lm/W
Colour designation	Warm Glow (WG)
Correlated Colour Temperature	2200 2700 K
Colour consistency	<6
Colour rendering index (CRI)	90
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	355 lm
Flickering value (PstLM)	1
Stroboscopic effect	0.4

# MASTER VALUE LEDspot MV

Photobiological safety according to EN 62471 RG1	
<b>Operating and Electrical</b>	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	4.9 W
Lamp current (nom.)	27 mA
Wattage equivalent	50 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (nom.)	220-240 V
<b>Temperature</b>	
T-Case maximum (nom.)	65 °C
<b>Controls and Dimming</b>	
Dimmable	Yes
<b>Mechanical and Housing</b>	
Bulb shape	PAR16
<b>Approval and Application</b>	
Energy Efficiency Class	F

Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	5 kWh
EPREL registration number	400288
EU RoHS compliant	Yes
EyeComfort	Yes
<b>Application Conditions</b>	
Can it be used in closed luminaires	No
<b>Product Data</b>	
Order product name	MAS LED spot VLEDT4.9-50W GU10 927 36DUK
Full product name	MASTER LED spot VLEDT4.9-50W GU10 927 36DUK
Full EOC	871869670811801
Order code	70811801
Material no. (12 NC)	929001350399
Numerator – quantity per pack	1
Net Weight (Piece)	0.038 kg
EAN/UPC – Product/Case	8718696708118
Numerator – packs per outer box	10
EAN/UPC - Case	8719514405752



## Dimensional drawing



Product	D	C
MAS LED spot VLEDT4.9-50W GU10 927 36DUK	50 mm	54 mm


# MASTER VALUE LEDspot MV

## Photometric data

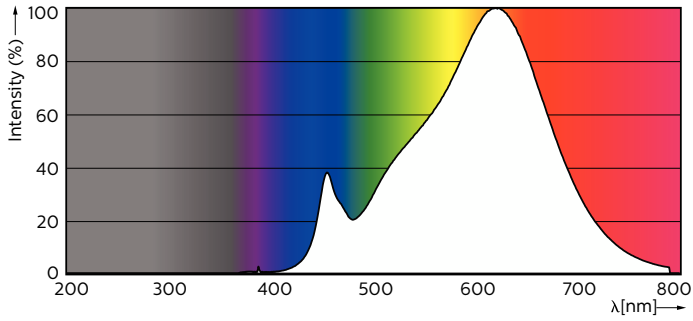

**Spectral Power Distribution Colour - MAS LED spot VLEDT4.9-50W GU10 927 36DUK**



**Light Distribution Diagram - MAS LED spot VLEDT4.9-50W GU10 927 36DUK**



General Information E1 Accent Lighting E1 Page 10

**Accent Lighting Spots - MAS LED spot VLEDT4.9-50W GU10 927 36DUK**

## Lifetime

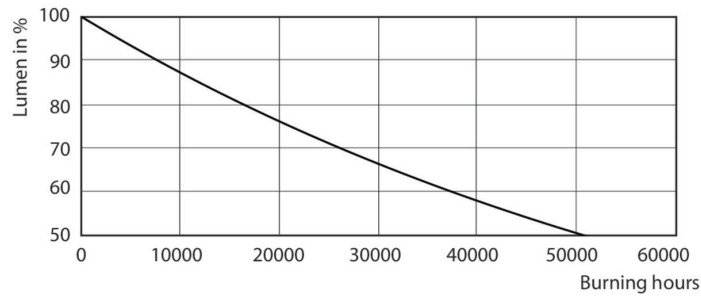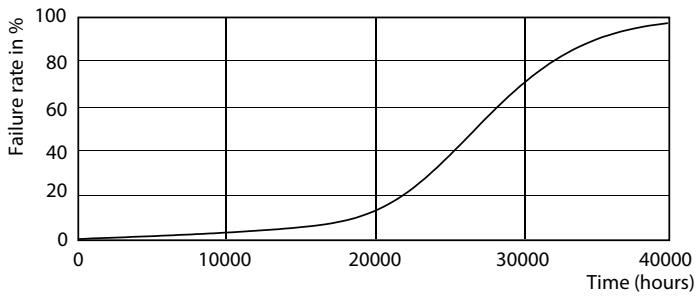

**25K LED**

**Lumen Maintenance Diagram - MAS LED spot VLEDT4.9-50W GU10 927 36DUK**

## MASTER VALUE LEDspot MV

