



# CorePro LEDcapsule LV



# CorePro LEDcapsuleLV 1.8-20W GY6.35 827

The CorePro LEDcapsule is a true alternative to the halogen capsule. It is particularly suitable for task lighting and decorative applications in homes, shops, hotels and restaurants. Compatible with existing fixtures with G4 holders and designed for retrofit replacement of halogen capsules, CorePro LEDcapsule delivers significant energy savings and minimises maintenance costs without any compromise on light quality.

## **Product data**

General Information	
Cap base	GY6.35
Nominal lifetime	15,000 h
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Colour Code	827 [CCT of 2700K]
Beam angle (nom.)	300 degree(s)
Luminous Flux	205 lm
Luminous efficacy (rated) (nom.)	113.00 lm/W
Colour designation	Warm White (WW)
Correlated Colour Temperature	2700 K
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %
Flickering value (PstLM)	0.4
Stroboscopic effect	1

Photobiological safety according to EN 62471 RG1			
Operating and Electrical			
Line Frequency	- Hz		
Input frequency	- Hz		
Power Consumption	1.8 W		
Lamp current (nom.)	260 mA		
Wattage equivalent	20 W		
Starting time (nom.)	0.5 s		
Warm-up time to 60% light	0.5 s		
Power Factor (Fraction)	0.6		
Voltage (nom.)	ac electronic 12 V		
Temperature			
T-Case maximum (nom.)	80 ℃		
Controls and Dimming			
Dimmable	No		


Datasheet, 2023, April 15 data subject to change

# CorePro LEDcapsule LV

Mechanical and Housing		
Bulb shape	Capsule	
Approval and Application		
Energy Efficiency Class	F	
Suitable for accent lighting	No	
Energy consumption kWh/1,000 hours	2 kWh	
EPREL registration number	374877	
CE mark	Yes	
EU RoHS compliant	Yes	
EyeComfort	Yes	
Application Conditions		
Can it be used in closed luminaires	No	


CorePro LEDcapsuleLV 1.8-20W GY6.35	
827	
CorePro LEDcapsuleLV 1.8-20W GY6.35	
827	
871869976779200	
76779200	
929002389702	
1	
0.010 kg	
8718699767792	
12	
8718699767808	

## Dimensional drawing




Product	D	С
CorePro LEDcapsuleLV 1.8-20W GY6.35 827	13 mm	35 mm

### Photometric data



Calculate Photogramsons 4.5 Philips Lighting file: Fage: 17


General uniform lighting - CorePro LEDcapsuleLV 1.8-20W GY6.35 827



Light Distribution Diagram - CorePro LEDcapsuleLV 1.8-20W GY6.35 827


# CorePro LEDcapsule LV


#### Photometric data

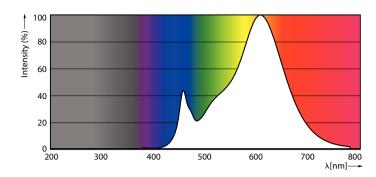

Spectral Power Distribution Colour - CorePro LEDcapsuleLV 1.8-20W GY6.35 827

### Lifetime

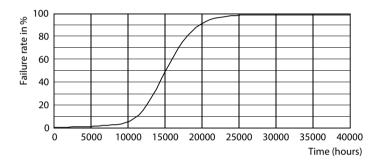



Life Expectancy Diagram

Lumen Maintenance Diagram - CorePro LEDcapsuleLV 1.8-20W GY6.35 827



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.